

Harvill & Water Warehouse

ENERGY ANALYSIS COUNTY OF RIVERSIDE

PREPARED BY:

Haseeb Qureshi hqureshi@urbanxroads.com

Alyssa Barnett abarnett@urbanxroads.com

AUGUST 31, 2022

14166-08 EA Report

TABLE OF CONTENTS

AP LIS LIS	PENDI ST OF E ST OF T	F CONTENTS	II II III 6
1	INT	roduction	
	1.1 1.2	Site Location Project Description	
2	EXI	ISTING CONDITIONS	12
	2.12.22.32.4	Overview	14 16
3	REC	GULATORY BACKGROUND	22
	3.1 3.2	Federal Regulations California Regulations	
4	PRO	OJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES	26
	4.1 4.2 4.3 4.4 4.5	Evaluation Criteria	26 27 35 37
5 6		NCLUSIONS FERENCES	
о 7		RTIFICATIONS	



APPENDICES

APPENDIX 4.1: CALEEMOD CONSTRUCTION EMISSIONS MODEL OUTPUTS APPENDIX 4.2: CALEEMOD OPERATIONS EMISSIONS MODEL OUTPUTS

APPENDIX 4.3: EMFAC2021

LIST OF EXHIBITS

EXHIBIT 1-A: LOCATION MAP	
EXHIBIT 1-B: SITE PLAN	10
<u>LIST OF TABLES</u>	
TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS	6
TABLE 2-1: TOTAL ELECRICITY SYSTEM POWER (CALIFORNIA 2020)	13
TABLE 2-2: SCE 2020 POWER CONTENT MIX	16
TABLE 4-1: CONSTRUCTION DURATION	27
TABLE 4-2: CONSTRUCTION POWER COST	28
TABLE 4-3: CONSTRUCTION ELECTRICITY USAGE	28
TABLE 4-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS	29
TABLE 4-5: CONSTRUCTION EQUIPMENT FUEL CONSUMPTION ESTIMATES	30
TABLE 4-6: CONSTRUCTION TRIPS AND VMT	31
TABLE 4-7: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES	32
TABLE 4-8: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES	33
TABLE 4-9: TOTAL PROJECT-GENERATED TRAFFIC ANNUAL FUEL CONSUMPTION	35
TABLE 4-10: ON-SITE CARGO HANDLING EQUIPMENT FUEL CONSUMPTION ESTIMATES	36
TABLE 4-13: PROJECT ANNUAL OPERATIONAL ENERGY DEMAND SUMMARY	



LIST OF ABBREVIATED TERMS

% Percent (1) Reference

AGSP Airport Gateway Specific Plan

AQIA Harvill & Water Warehouse Air Quality Impact Analysis

BACM Best Available Control Measures

BTU British Thermal Units

CalEEMod California Emissions Estimator Model

CAPCOA California Air Pollution Control Officers Association

CARB California Air Resources Board
CCR California Code of Regulations
CEC California Energy Commission

CEQA California Environmental Quality Act

County County of Riverside

CPEP Clean Power and Electrification Pathway
CPUC California Public Utilities Commission

DMV Department of Motor Vehicles
EIA Energy Information Administration
EPA Environmental Protection Agency

EMFAC EMissions FACtor

FERC Federal Energy Regulatory Commission

GHG Greenhouse Gas GWh Gigawatt Hour

HHD Heavy-Heavy Duty Trucks
hp-hr-gal Horsepower Hours Per Gallon
IEPR Integrated Energy Policy Report
ISO Independent Service Operator

ISTEA Intermodal Surface Transportation Efficiency Act

ITE Institute of Transportation Engineers

kBTU Thousand-British Thermal Units

kWh Kilowatt Hour
LDA Light Duty Auto
LDT1/LDT2 Light-Duty Trucks

LHD1/LHD2 Light-Heavy Duty Trucks MDV Medium Duty Trucks

MHD Medium-Heavy Duty Trucks MMcfd Million Cubic Feet Per Day



mpg Miles Per Gallon

MPO Metropolitan Planning Organization

PG&E Pacific Gas and Electric

Project Harvill & Water Warehouse

PV Photovoltaic

SCAB South Coast Air Basin

SCE Southern California Edison

SDAB San Diego Air Basin

sf Square Feet

SoCalGas Southern California Gas

TEA-21 Transportation Equity Act for the 21st Century

U.S. United States

VMT Vehicle Miles Traveled



This page intentionally left blank



EXECUTIVE SUMMARY

ES.1 SUMMARY OF FINDINGS

The results of this *Harvill & Water Warehouse Energy Analysis* is summarized below based on the significance criteria in Section 5 of this report consistent with Appendix G of the 2022 California Environmental Quality Act (CEQA) Statute and Guidelines (*CEQA Guidelines*) (1). Table ES-1 shows the findings of significance for potential energy impacts under CEQA.

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS

Analysis	Report	Significance Findings			
Analysis	Section	Unmitigated	Mitigated		
Energy Impact #1: Would the Project result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation?	5.0	Less Than Significant	n/a		
Energy Impact #2: Would the Project conflict with or obstruct a state or local plan for renewable energy or energy efficiency?	5.0	Less Than Significant	n/a		

ES.2 PROJECT REQUIREMENTS

The Project would be required to comply with regulations imposed by the federal and state agencies that regulate energy use and consumption through various means and programs. Those that are directly and indirectly applicable to the Project and that would assist in the reduction of energy usage include:

- Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA)
- The Transportation Equity Act for the 21st Century (TEA-21
- Integrated Energy Policy Report (IEPR)
- State of California Energy Plan
- California Code Title 24, Part 6, Energy Efficiency Standards
- California Code Title 24, Part 11, California Green Building Standards Code (CALGreen)
- AB 1493 Pavley Regulations and Fuel Efficiency Standards
- California's Renewable Portfolio Standard (RPS)
- Clean Energy and Pollution Reduction Act of 2015 (SB 350)

Consistency with the above regulations is discussed in detail in section 5 of this report.



This page intentionally left blank



1 INTRODUCTION

This report presents the results of the energy analysis prepared by Urban Crossroads, Inc., for the proposed Harvill & Water Warehouse Project (Project). The purpose of this report is to ensure that energy implication is considered by the County of Riverside (Lead Agency), as the lead agency, and to quantify anticipated energy usage associated with construction and operation of the proposed Project, determine if the usage amounts are efficient, typical, or wasteful for the land use type, and to emphasize avoiding or reducing inefficient, wasteful, and unnecessary consumption of energy.

1.1 SITE LOCATION

The proposed Project site is located within the Mead Valley Area of Riverside County, comprising four parcels at the southwest corner of Water Avenue and Harvill Avenue. Regional access to the Project site is provided by Interstate 215 (I-215). Local access to the site is provided from Water Avenue and Orange Avenue. The Project site and surrounding area is shown on Exhibit 1-A.

1.2 PROJECT DESCRIPTION

The Project is proposed to consist of the development of 434,823 square feet (sf) of warehouse space. In order to conservatively evaluate the Project scenario with potential to generate the largest quantity of emissions, this analysis assumes that 130,447 sf (30 percent of the overall square footage) will be utilized as high-cube cold storage warehouse uses, while the remaining 304,376 sf would be developed as high-cube fulfillment center warehouse use. Evaluation of this scenario is conservative as mix of high-cube cold storage and high-cube fulfillment would generate a larger quantity of emissions than if the Project were to be developed as 434,823 sf of high-cube fulfillment center use. It is anticipated that the Project would be developed in a single phase with an anticipated Opening Year of 2024.

This analysis is intended to describe energy impacts associated with the expected typical operational activities at the Project site. To present a conservative approach, this report assumes the Project would operate 24-hours daily for seven days per week.




Walnut St Hagan Ln 1488 ft Placentia Ave W Placentia Ave. Placentia Ave Val Verde Elementary School Water Ave Water St Wate Site Orange Ave Orange Ave W Orange Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS Le mon Ave LemonAve

EXHIBIT 1-A: LOCATION MAP



EXHIBIT 1-B: SITE PLAN

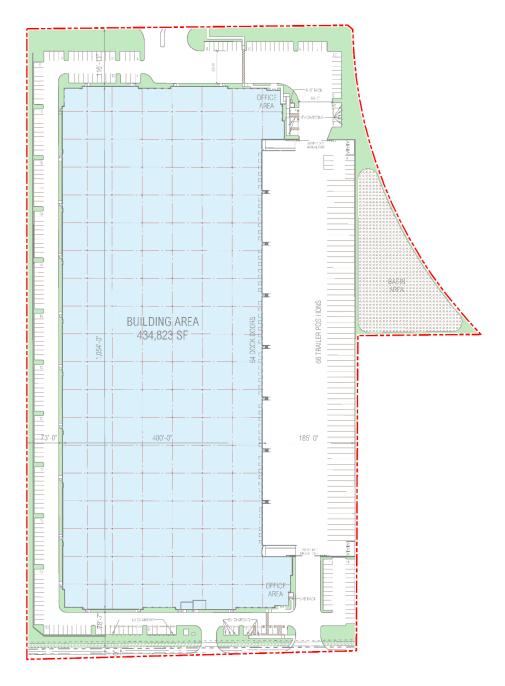



LEGEND:

Site Boundary



This page intentionally left blank



2 EXISTING CONDITIONS

This section provides an overview of the existing energy conditions in the Project region.

2.1 OVERVIEW

The most recent data for California's estimated total energy consumption and natural gas consumption is from 2019, released by the United States (U.S.) Energy Information Administration's (EIA) California State Profile and Energy Estimates in 2021 and included (2):

- As of 2019, approximately 7,802 trillion British Thermal Unit (BTU) of energy was consumed
- As of 2019, approximately 662 million barrels of petroleum
- As of 2019, approximately 2,144 billion cubic feet of natural gas
- As of 2019, approximately 1 million short tons of coal

The California Energy Commission's (CEC) Transportation Energy Demand Forecast 2018-2030 was released in order to support the 2017 Integrated Energy Policy Report. The Transportation energy Demand Forecast 2018-2030 lays out graphs and data supporting CEC's projections of California's future transportation energy demand. The projected inputs consider expected variable changes in fuel prices, income, population, and other variables. Predictions regarding fuel demand included:

- Gasoline demand in the transportation sector is expected to decline from approximately 15.8 billion gallons in 2017 to between 12.3 billion and 12.7 billion gallons in 2030 (3)
- Diesel demand in the transportation sector is expected to rise, increasing from approximately 3.7 billion diesel gallons in 2015 to approximately 4.7 billion in 2030 (3)
- Data from the Department of Energy states that approximately 3.9 billion gallons of diesel fuel were consumed in 2019 (4)

The most recent data provided by the EIA for energy use in California by demand sector is from 2018 and is reported as follows:

- Approximately 39.3% transportation
- Approximately 23.2% industrial
- Approximately 18.7% residential
- Approximately 18.9% commercial (5)

In 2020, total system electric generation for California was 272,576 gigawatt hours (GWh). California's massive electricity in-state generation system generated approximately 190,913 GWh which accounted for approximately 70% of the electricity it uses; the rest was imported from the Pacific Northwest (15%) and the U.S. Southwest (15%) (6). Natural gas is the main source for electricity generation at 42.97% of the total in-state electric generation system power as shown in Table 2-1.



TABLE 2-1: TOTAL ELECRICITY SYSTEM POWER (CALIFORNIA 2020)

Fuel Type	California In-State Generation (GWh)	% of California In- State Generation	Northwest Imports (GWh)	Southwest Imports (GWh)	Total Imports (GWh)	% of Imports	Total California Energy Mix	Total California Power Mix
Coal	317	0.17%	194	6,963	7,157	8.76%	7,474	2.74%
Natural Gas	92,298	48.35%	70	8,654	8,724	10.68%	101,022	37.06%
Oil	30	0.02%	-	-	0	0.00%	30	0.01%
Other (Waste Heat/Petroleum Coke)	384	0.20%	125	9	134	0.16%	518	0.19%
Nuclear	16,280	8.53%	672	8,481	9,154	11.21%	25,434	9.33%
Large Hydro	17,938	9.40%	14,078	1,259	15,337	18.78%	33,275	12.21%
Unspecified	-	0.00%	12,870	1,745	14,615	17.90%	14,615	5.36%
Non-Renewable and Unspecified Totals	127,248	66.65%	28,009	27,111	55,120	67.50%	182,368	66.91%
Biomass	5,680	2.97%	975	25	1,000	1.22%	6,679	2.45%
Geothermal	11,345	5.94%	166	1,825	1,991	2.44%	13,336	4.89%
Small Hydro	3,476	1.82%	320	2	322	0.39%	3,798	1.39%
Solar	29,456	15.43%	284	6,312	6,596	8.08%	36,052	13.23%
Wind	13,708	7.18%	11,438	5,197	16,635	20.37%	30,343	11.13%
Renewable Totals	63,665	33.35%	13,184	13,359	26,543	32.50%	90,208	33.09%
System Totals	190,913	100.00%	41,193	40,471	81,663	100.00%	272,576	100.00%

Source: CECs 2020 Total System Electric Generation



An updated summary of, and context for energy consumption and energy demands within the State is presented in "U.S. Energy Information Administration, California State Profile and Energy Estimates, Quick Facts" excerpted below (7):

- California was the seventh-largest producer of crude oil among the 50 states in 2019, and, as of January 2020, it ranked third in oil refining capacity. Foreign suppliers, led by Saudi Arabia, Iraq, Ecuador, and Colombia, provided more than half of the crude oil refined in California in 2019.
- California is the largest consumer of both jet fuel and motor gasoline among the 50 states and accounted for 17% of the nation's jet fuel consumption and 11% of motor gasoline consumption in 2019. The state is the second-largest consumer of all petroleum products combined, accounting for 10% of the U.S. total. In 2018, California's energy consumption was the second highest among the states, but its per capita energy consumption was the fourth-lowest due in part to its mild climate and its energy efficiency programs.
- In 2019, California was the nation's top producer of electricity from solar, geothermal, and biomass energy and the state was second in the nation in conventional hydroelectric power generation.
- In 2019, California was the fourth largest electricity producer in the nation, but the state was also the nation's largest importer of electricity and received about 28% of its electricity supply from generating facilities outside of California, including imports from Mexico.

As indicated above, California is one of the nation's leading energy-producing states, and California's per capita energy use is among the nation's most efficient. Given the nature of the Project, the remainder of this discussion will focus on the three sources of energy that are most relevant to the Project—namely, electricity, natural gas, and transportation fuel for vehicle trips associated with the uses planned for the Project.

2.2 ELECTRICITY

The usage associated with electricity use were calculated using CalEEMod Version 2022.1. The Southern California region's electricity reliability has been of concern for the past several years due to the planned retirement of aging facilities that depend upon once-through cooling technologies, as well as the June 2013 retirement of the San Onofre Nuclear Generating Station (San Onofre). While the once-through cooling phase-out has been ongoing since the May 2010 adoption of the State Water Resources Control Board's once-through cooling policy, the retirement of San Onofre complicated the situation. California Independent Service Operator (ISO) studies revealed the extent to which the South Coast Air Basin (SCAB) and the San Diego Air Basin (SDAB) region were vulnerable to low-voltage and post-transient voltage instability concerns. A preliminary plan to address these issues was detailed in the 2013 Integrative Energy Policy Report (IEPR) after a collaborative process with other energy agencies, utilities, and air districts (8). Similarly, the subsequent 2021 IEPR's provides information and policy recommendations on advancing a clean, reliable, and affordable energy system.



California's electricity industry is an organization of traditional utilities, private generating companies, and state agencies, each with a variety of roles and responsibilities to ensure that electrical power is provided to consumers. The California ISO is a nonprofit public benefit corporation and is the impartial operator of the State's wholesale power grid and is charged with maintaining grid reliability, and to direct uninterrupted electrical energy supplies to California's homes and communities. While utilities still own transmission assets, the ISO routes electrical power along these assets, maximizing the use of the transmission system and its power generation resources. The ISO matches buyers and sellers of electricity to ensure that enough power is available to meet demand. To these ends, every five minutes the ISO forecasts electrical demands, accounts for operating reserves, and assigns the lowest cost power plant unit to meet demands while ensuring adequate system transmission capacities and capabilities (9).

Part of the ISO's charge is to plan and coordinate grid enhancements to ensure that electrical power is provided to California consumers. To this end, utilities file annual transmission expansion/modification plans to accommodate the State's growing electrical needs. The ISO reviews and either approves or denies the proposed additions. In addition, and perhaps most importantly, the ISO works with other areas in the western United States electrical grid to ensure that adequate power supplies are available to the State. In this manner, continuing reliable and affordable electrical power is assured to existing and new consumers throughout the State.

Electricity is currently provided to the Project by Southern California Edison (SCE). SCE provides electric power to more than 15 million persons in 15 counties and in 180 incorporated cities, within a service area encompassing approximately 50,000 square miles. Based on SCE's 2018 Power Content Label Mix, SCE derives electricity from varied energy resources including: fossil fuels, hydroelectric generators, nuclear power plants, geothermal power plants, solar power generation, and wind farms. SCE also purchases from independent power producers and utilities, including out-of-state suppliers (10).

Tables 2-2 identifies SCE's specific proportional shares of electricity sources in 2020. As indicated in Table 2-2, the 2020 SCE Power Mix has renewable energy at 30.9% of the overall energy resources. Geothermal resources are at 5.5%, wind power is at 9.4%, large hydroelectric sources are at 3.3%, solar energy is at 15.1%, and coal is at 0% (11).



TABLE 2-2: SCE 2020 POWER CONTENT MIX

Energy Resources	2020 SCE Power Mix
Eligible Renewable	30.9%
Biomass & Waste	0.1%
Geothermal	5.5%
Eligible Hydroelectric	0.8%
Solar	15.1%
Wind	9.4%
Coal	0.0%
Large Hydroelectric	3.3%
Natural Gas	15.2%
Nuclear	8.4%
Other	0.3%
Unspecified Sources of power*	42.0%
Total	100%

^{* &}quot;Unspecified sources of power" means electricity from transactions that are not traceable to specific generation sources

2.3 NATURAL GAS

The following summary of natural gas customers and volumes, supplies, delivery of supplies, storage, service options, and operations is excerpted from information provided by the California Public Utilities Commission (CPUC).

"The CPUC regulates natural gas utility service for approximately 10.8 million customers that receive natural gas from Pacific Gas and Electric (PG&E), Southern California Gas (SoCalGas), San Diego Gas & Electric (SDG&E), Southwest Gas, and several smaller natural gas utilities. The CPUC also regulates independent storage operators: Lodi Gas Storage, Wild Goose Storage, Central Valley Storage and Gill Ranch Storage.

California's natural gas utilities provide service to over 11 million gas meters. SoCalGas and PG&E provide service to about 5.9 million and 4.3 million customers, respectively, while SDG&E provides service to over 800, 000 customers. In 2018, California gas utilities forecasted that they would deliver about 4740 million cubic feet per day (MMcfd) of gas to their customers, on average, under normal weather conditions.

The overwhelming majority of natural gas utility customers in California are residential and small commercials customers, referred to as "core" customers. Larger volume gas customers, like electric generators and industrial customers, are called "noncore" customers. Although very small in number relative to core customers, noncore customers consume about 65% of the natural gas delivered by the state's natural gas utilities, while core customers consume about 35%.



A significant amount of gas (about 19%, or 1131 MMcfd, of the total forecasted California consumption in 2018) is also directly delivered to some California large volume consumers, without being transported over the regulated utility pipeline system. Those customers, referred to as "bypass" customers, take service directly from interstate pipelines or directly from California producers.

SDG&E and Southwest Gas' southern division are wholesale customers of SoCalGas, i.e., they receive deliveries of gas from SoCalGas and in turn deliver that gas to their own customers. (Southwest Gas also provides natural gas distribution service in the Lake Tahoe area.) Similarly, West Coast Gas, a small gas utility, is a wholesale customer of PG&E. Some other wholesale customers are municipalities like the cities of Palo Alto, Long Beach, and Vernon, which are not regulated by the CPUC.

Natural gas from out-of-state production basins is delivered into California via the interstate natural gas pipeline system. The major interstate pipelines that deliver out-of-state natural gas to California gas utilities are Gas Transmission Northwest Pipeline, Kern River Pipeline, Transwestern Pipeline, El Paso Pipeline, Ruby Pipeline, Mojave Pipeline, and Tuscarora. Another pipeline, the North Baja - Baja Norte Pipeline takes gas off the El Paso Pipeline at the California/Arizona border and delivers that gas through California into Mexico. While the Federal Energy Regulatory Commission (FERC) regulates the transportation of natural gas on the interstate pipelines, and authorizes rates for that service, the California Public Utilities Commission may participate in FERC regulatory proceedings to represent the interests of California natural gas consumers.

The gas transported to California gas utilities via the interstate pipelines, as well as some of the California-produced gas, is delivered into the PG&E and SoCalGas intrastate natural gas transmission pipelines systems (commonly referred to as California's "backbone" pipeline system). Natural gas on the utilities' backbone pipeline systems is then delivered to the local transmission and distribution pipeline systems, or to natural gas storage fields. Some large volume noncore customers take natural gas delivery directly off the high-pressure backbone and local transmission pipeline systems, while core customers and other noncore customers take delivery off the utilities' distribution pipeline systems. The state's natural gas utilities operate over 100,000 miles of transmission and distribution pipelines, and thousands more miles of service lines.

Bypass customers take most of their deliveries directly off the Kern/Mojave pipeline system, but they also take a significant amount of gas from California production.

PG&E and SoCalGas own and operate several natural gas storage fields that are located within their service territories in northern and southern California, respectively. These storage fields, and four independently owned storage utilities - Lodi Gas Storage, Wild Goose Storage, Central Valley Storage, and Gill Ranch Storage - help meet peak seasonal and daily natural gas demand and allow California natural gas customers to secure natural gas supplies more efficiently. PG&E is a 25% owner of the Gill Ranch Storage field. These storage fields provide a significant amount of infrastructure capacity to help meet



California's natural gas requirements, and without these storage fields, California would need much more pipeline capacity in order to meet peak gas requirements.

Prior to the late 1980s, California regulated utilities provided virtually all natural gas services to all their customers. Since then, the Commission has gradually restructured the California gas industry in order to give customers more options while assuring regulatory protections for those customers that wish to, or are required to, continue receiving utility-provided services.

The option to purchase natural gas from independent suppliers is one of the results of this restructuring process. Although the regulated utilities procure natural gas supplies for most core customers, core customers have the option to purchase natural gas from independent natural gas marketers, called "core transport agents" (CTA). Contact information for core transport agents can be found on the utilities' web sites. Noncore customers, on the other hand, make natural gas supply arrangements directly with producers or with marketers.

Another option resulting from the restructuring process occurred in 1993, when the Commission removed the utilities' storage service responsibility for noncore customers, along with the cost of this service from noncore customers' transportation rates. The Commission also encouraged the development of independent storage fields, and in subsequent years, all the independent storage fields in California were established. Noncore customers and marketers may now take storage service from the utility or from an independent storage provider (if available), and pay for that service, or may opt to take no storage service at all. For core customers, the Commission assures that the utility has adequate storage capacity set aside to meet core requirements, and core customers pay for that service.

In a 1997 decision, the Commission adopted PG&E's "Gas Accord", which unbundled PG&E's backbone transmission costs from noncore transportation rates. This decision gave customers and marketers the opportunity to obtain pipeline capacity rights on PG&E's backbone transmission pipeline system, if desired, and pay for that service at rates authorized by the Commission. The Gas Accord also required PG&E to set aside a certain amount of backbone transmission capacity in order to deliver gas to its core customers. Subsequent Commission decisions modified and extended the initial terms of the Gas Accord. The "Gas Accord" framework is still in place today for PG&E's backbone and storage rates and services and is now simply referred to as PG&E Gas Transmission and Storage (GT&S).

In a 2006 decision, the Commission adopted a similar gas transmission framework for Southern California, called the "firm access rights" system. SoCalGas and SDG&E implemented the firm access rights (FAR) system in 2008, and it is now referred to as the backbone transmission system (BTS) framework. As under the PG&E backbone transmission system, SoCalGas backbone transmission costs are unbundled from noncore transportation rates. Noncore customers and marketers may obtain, and pay for, firm backbone transmission capacity at various receipt points on the SoCalGas system. A



certain amount of backbone transmission capacity is obtained for core customers to assure meeting their requirements.

Many if not most noncore customers now use a marketer to provide for several of the services formerly provided by the utility. That is, a noncore customer may simply arrange for a marketer to procure its supplies, and obtain any needed storage and backbone transmission capacity, in order to assure that it will receive its needed deliveries of natural gas supplies. Core customers still mainly rely on the utilities for procurement service, but they have the option to take procurement service from a CTA. Backbone transmission and storage capacity is either set aside or obtained for core customers in amounts to assure very high levels of service.

In order properly operate their natural gas transmission pipeline and storage systems, PG&E and SoCalGas must balance the amount of gas received into the pipeline system and delivered to customers or to storage fields. Some of these utilities' storage capacity is dedicated to this service, and under most circumstances, customers do not need to precisely match their deliveries with their consumption. However, when too much or too little gas is expected to be delivered into the utilities' systems, relative to the amount being consumed, the utilities require customers to more precisely match up their deliveries with their consumption. And, if customers do not meet certain delivery requirements, they could face financial penalties. The utilities do not profit from these financial penalties the amounts are then returned to customers as a whole. If the utilities find that they are unable to deliver all the gas that is expected to be consumed, they may even call for a curtailment of some gas deliveries. These curtailments are typically required for just the largest, noncore customers. It has been many years since there has been a significant curtailment of core customers in California." (12)

As indicated in the preceding discussions, natural gas is available from a variety of in-state and out-of-state sources and is provided throughout the state in response to market supply and demand. Complementing available natural gas resources, biogas may soon be available via existing delivery systems, thereby increasing the availability and reliability of resources in total. The CPUC oversees utility purchases and transmission of natural gas to ensure reliable and affordable natural gas deliveries to existing and new consumers throughout the State.

2.4 Transportation Energy Resources

The Project would generate additional vehicle trips with resulting consumption of energy resources, predominantly gasoline and diesel fuel. The Department of Motor Vehicles (DMV) identified 36.2 million registered vehicles in California (13), and those vehicles consume an estimated 17.2 billion gallons of fuel each year¹. Gasoline (and other vehicle fuels) are commercially provided commodities and would be available to the Project patrons and employees via commercial outlets.



¹ Fuel consumptions estimated utilizing information from EMFAC2021.

California's on-road transportation system includes 396,616 lane miles, more than 26.6 million passenger vehicles and light trucks, and almost 9.0 million medium- and heavy-duty vehicles (13). While gasoline consumption has been declining since 2008 it is still by far the dominant fuel. California is the second-largest consumer of petroleum products, after Texas, and accounts for 10% of the nation's total consumption. The state is the largest U.S. consumer of motor gasoline and jet fuel, and 85% of the petroleum consumed in California is used in the transportation sector (14).

California accounts for less than 1% of total U.S. natural gas reserves and production. As with crude oil, California's natural gas production has experienced a gradual decline since 1985. In 2019, about 37% of the natural gas delivered to consumers went to the state's industrial sector, and about 28% was delivered to the electric power sector. Natural gas fueled more than two-fifths of the state's utility-scale electricity generation in 2019. The residential sector, where two-thirds of California households use natural gas for home heating, accounted for 22% of natural gas deliveries. The commercial sector received 12% of the deliveries to end users and the transportation sector consumed the remaining 1% (14).



This page intentionally left blank



3 REGULATORY BACKGROUND

Federal and state agencies regulate energy use and consumption through various means and programs. On the federal level, the United States Department of Transportation, the United States Department of Energy, and the United States Environmental Protection Agency (EPA) are three federal agencies with substantial influence over energy policies and programs. On the state level, the CPUC and the CEC are two agencies with authority over different aspects of energy. Relevant federal and state energy-related laws and plans are summarized below.

3.1 FEDERAL REGULATIONS

3.1.1 Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA)

ISTEA promoted the development of inter-modal transportation systems to maximize mobility as well as address national and local interests in air quality and energy. ISTEA contained factors that Metropolitan Planning Organizations (MPOs) were to address in developing transportation plans and programs, including some energy-related factors. To meet the new ISTEA requirements, MPOs adopted explicit policies defining the social, economic, energy, and environmental values guiding transportation decisions.

3.1.2 THE TRANSPORTATION EQUITY ACT FOR THE 21ST CENTURY (TEA-21)

TEA-21 was signed into law in 1998 and builds upon the initiatives established in the ISTEA legislation, discussed above. TEA-21 authorizes highway, highway safety, transit, and other efficient surface transportation programs. TEA-21 continues the program structure established for highways and transit under ISTEA, such as flexibility in the use of funds, emphasis on measures to improve the environment, and focus on a strong planning process as the foundation of good transportation decisions. TEA-21 also provides for investment in research and its application to maximize the performance of the transportation system through, for example, deployment of Intelligent Transportation Systems, to help improve operations and management of transportation systems and vehicle safety.

3.2 CALIFORNIA REGULATIONS

3.2.1 Integrated Energy Policy Report (IEPR)

Senate Bill 1389 (Bowen, Chapter 568, Statutes of 2002) requires the CEC to prepare a biennial integrated energy policy report that assesses major energy trends and issues facing the state's electricity, natural gas, and transportation fuel sectors and provides policy recommendations to conserve resources; protect the environment; ensure reliable, secure, and diverse energy supplies; enhance the state's economy; and protect public health and safety (Public Resources Code § 25301[a]). The CEC prepares these assessments and associated policy recommendations every two years, with updates in alternate years, as part of the Integrated Energy Policy Report.

The 2021 IEPR was adopted February 22, 2022, and continues to work towards improving electricity, natural gas, and transportation fuel energy use in California. The 2021 IEPR provides



the results of the CEC's assessments of a variety of energy issues facing California. Many of these issues will require action if the state is to meet its climate, energy, air quality, and other environmental goals while maintaining reliability and controlling costs. Additionally, the 2021 IEPR provides the results of the CEC's assessments of a variety of energy issues facing California. Many of these issues will require action if the state is to meet its climate, energy, air quality, and other environmental goals while maintaining reliability and controlling costs (15).

3.2.2 STATE OF CALIFORNIA ENERGY PLAN

The CEC is responsible for preparing the State Energy Plan, which identifies emerging trends related to energy supply, demand, conservation, public health and safety, and the maintenance of a healthy economy. The Plan calls for the state to assist in the transformation of the transportation system to improve air quality, reduce congestion, and increase the efficient use of fuel supplies with the least environmental and energy costs. To further this policy, the plan identifies several strategies, including assistance to public agencies and fleet operators and encouragement of urban designs that reduce vehicle miles traveled (VMT) and accommodate pedestrian and bicycle access.

3.2.3 CALIFORNIA CODE TITLE 24, PART 6, ENERGY EFFICIENCY STANDARDS

California Code of Regulations (CCR) Title 24 Part 6: The California Energy Code was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption.

The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. CCR, Title 24, Part 11: California Green Building Standards Code (CALGreen) is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on August 1, 2009, and is administered by the California Building Standards Commission.

CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2022 California Green Building Code Standards that will be effective on January 1, 2023². The Project would be required to comply with the applicable standards in place at the time plan check submittals are made (16).

3.2.4 AB 1493 PAVLEY REGULATIONS AND FUEL EFFICIENCY STANDARDS

California AB 1493, enacted on July 22, 2002, required CARB to develop and adopt regulations that reduce GHGs emitted by passenger vehicles and light duty trucks. Under this legislation, CARB adopted regulations to reduce GHG emissions from non-commercial passenger vehicles (cars and light-duty trucks). Although aimed at reducing GHG emissions, specifically, a co-benefit of the Pavley standards is an improvement in fuel efficiency and consequently a reduction in fuel consumption.



² The 2022 California Green Building Standard Code will be published July 1, 2022.

3.2.5 CALIFORNIA'S RENEWABLE PORTFOLIO STANDARD (RPS)

First established in 2002 under Senate Bill (SB) 1078, California's Renewable Portfolio Standards (RPS) requires retail sellers of electric services to increase procurement from eligible renewable resources to 33% of total retail sales by 2020 (17).

3.2.6 CLEAN ENERGY AND POLLUTION REDUCTION ACT OF 2015 (SB 350)

In October 2015, the legislature approved, and the Governor signed SB 350, which reaffirms California's commitment to reducing its GHG emissions and addressing climate change. Key provisions include an increase in the renewables portfolio standard (RPS), higher energy efficiency requirements for buildings, initial strategies towards a regional electricity grid, and improved infrastructure for electric vehicle charging stations. Specifically, SB 350 requires the following to reduce statewide GHG emissions:

- Increase the amount of electricity procured from renewable energy sources from 33% to 50% by 2030, with interim targets of 40% by 2024, and 25% by 2027.
- Double the energy efficiency in existing buildings by 2030. This target will be achieved through the California Public Utility Commission (CPUC), the CEC, and local publicly owned utilities.
- Reorganize the Independent System Operator (ISO) to develop more regional electrify transmission markets and to improve accessibility in these markets, which will facilitate the growth of renewable energy markets in the western United States (California Leginfo 2015).



This page intentionally left blank



4 PROJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES

4.1 EVALUATION CRITERIA

Appendix F of the *State CEQA Guidelines* (18), states that the means of achieving the goal of energy conservation includes the following:

- Decreasing overall per capita energy consumption;
- Decreasing reliance on fossil fuels such as coal, natural gas, and oil; and
- Increasing reliance on renewable energy sources.

In compliance with Appendix G of the *State CEQA Guidelines* (19), this report analyzes the project's anticipated energy use during construction and operations to determine if the Project would:

- Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation; or
- Conflict with or obstruct a state or local plan for renewable energy or energy efficiency

4.2 METHODOLOGY

Information from the CalEEMod Version 2022.1 outputs for the *Harvill & Water Warehouse Air Quality Impact Analysis* (AQIA) (20) was utilized in this analysis, detailing Project related construction equipment, transportation energy demands, and facility energy demands.

4.2.1 CALEEMOD

In May 2022, the SCAQMD, in conjunction with the California Air Pollution Control Officers Association (CAPCOA) and other California air districts, released the latest version of the CalEEMod Version 2022.1. The purpose of this model is to calculate construction-source and operational-source criteria pollutants and GHG emissions from direct and indirect sources as well as energy usage (21). Accordingly, the latest version of CalEEMod has been used to determine the proposed Project's anticipated transportation and facility energy demands. Outputs from the annual model runs are provided in Appendices 4.1 through Appendices 4.2.

4.2.2 EMISSION FACTORS MODEL

On May 2, 2022, the EPA approved the 2021 version of the EMissions FACtor model (EMFAC2021) web database for use in State Implementation Plan and transportation conformity analyses. EMFAC2021 is a mathematical model that was developed to calculate emission rates, fuel consumption, VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from onroad mobile sources (22). This energy study utilizes the different fuel types for each vehicle class from the annual EMFAC2021 emission inventory in order to derive the average vehicle fuel economy which is then used to determine the estimated annual fuel consumption associated with vehicle usage during Project construction and operational activities. For purposes of



analysis, the 2023 and 2024 analysis years were utilized to determine the average vehicle fuel economy used throughout the duration of the Project. Output from the EMFAC2021 model run is provided in Appendix 4.3.

4.3 CONSTRUCTION ENERGY DEMANDS

The focus within this section is the energy implications of the construction process, specifically the power cost from on-site electricity consumption during construction of the proposed Project.

4.3.1 CONSTRUCTION POWER COST

The total Project construction power costs is the summation of the products of the area (sf) by the construction duration and the typical power cost.

CONSTRUCTION DURATION

For purposes of analysis, construction of Project is expected to commence in January 2023 and would last through May 2024 (20). The construction schedule utilized in the analysis, shown in Table 4-1, represents a "worst-case" analysis scenario. The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per *CEQA Guidelines* (23).

Construction Activity Start Date End Date Days Site Preparation 01/03/2023 01/16/2023 10 01/17/2023 03/20/2023 45 Grading **Building Construction** 03/21/2023 04/22/2024 285 **Paving** 04/23/2024 05/20/2024 20 **Architectural Coating** 03/26/2024 05/20/2024 40

TABLE 4-1: CONSTRUCTION DURATION

PROJECT CONSTRUCTION POWER COST

The 2022 National Construction Estimator identifies a typical power cost per 1,000 sf of construction per month of \$2.41, which was used to calculate the Project's total construction power cost (24).

As shown on Table 4-2, the total power cost of the on-site electricity usage during the construction of the Project is estimated to be approximately \$33,882.09.



TABLE 4-2: CONSTRUCTION POWER COST

Land Use	Power Cost (per 1,000 SF of construction per month) Size (1,000 SF)		Construction Duration (months)	Project Construction Power Cost
Warehouse Space	\$2.41	438.823	16	\$16,921.01
Parking Lot	\$2.41	99.079	16	\$3,820.49
Other Asphalt Surfaces	\$2.41	205.603	16	\$7,928.05
Landscape Area	\$2.41	135.180	16	\$5,212.54
	\$33,882.09			

4.3.2 CONSTRUCTION ELECTRICITY USAGE

The total Project construction electricity usage is the summation of the products of the power cost (estimated in Table 4-2) by the utility provider cost per kilowatt hour (kWh) of electricity.

PROJECT CONSTRUCTION ELECTRICITY USAGE

The SCE's general service rate schedule were used to determine the Project's electrical usage. As of January 1, 2022, SCE's general service rate is \$0.13 per kilowatt hours (kWh) of electricity for industrial services (25). As shown on Table 4-3, the total electricity usage from on-site Project construction related activities is estimated to be approximately 257,288 kWh.

TABLE 4-3: CONSTRUCTION ELECTRICITY USAGE

Land Use	Cost per kWh	Project Construction Electricity Usage (kWh)
Warehouse Space	\$0.13	128,462
Parking Lot	\$0.13	29,005
Other Asphalt Surfaces	\$0.13	60,189
Landscape Area	\$0.13	39,573
CONSTRUCTION	257,288	

4.3.3 CONSTRUCTION EQUIPMENT FUEL ESTIMATES

Fuel consumed by construction equipment would be the primary energy resource expended over the course of Project construction.

CONSTRUCTION EQUIPMENT

Consistent with industry standards and typical construction practices, each piece of equipment listed in Table 4-4 will operate up to a total of eight (8) hours per day, or more than two-thirds of the period during which construction activities are allowed.



TABLE 4-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS

Construction Activity	Equipment	Amount	Hours Per Day
Cita Duanavation	Crawler Tractors	4	8
Site Preparation	Rubber Tired Dozers	3	8
	Crawler Tractors	2	8
	Excavators	2	8
Grading	Graders	2	8
	Scrapers	6	8
	Rubber Tired Dozers	1	8
	Cranes	1	8
	Forklifts	3	8
Building Construction	Generator Sets	2	8
	Tractors/Loaders/Backhoes	3	8
	Welders	2	8
	Pavers	2	8
Pavers	Paving Equipment	2	8
	Rollers	2	8
Architectural Coating	Air Compressors	2	8

PROJECT CONSTRUCTION EQUIPMENT FUEL CONSUMPTION

Project construction activity timeline estimates, construction equipment schedules, equipment power ratings, load factors, and associated fuel consumption estimates are presented in Table 4-5. The aggregate fuel consumption rate for all equipment is estimated at 18.5 horsepower hour per gallon (hp-hr-gal.), obtained from CARB 2018 Emissions Factors Tables and cited fuel consumption rate factors presented in Table D-24 of the Moyer guidelines (26). For the purposes of this analysis, the calculations are based on all construction equipment being diesel-powered, which is consistent with industry standards.

Diesel fuel would be supplied by existing commercial fuel providers serving the Project area and region³. As presented in Table 4-5, Project construction activities would consume an estimated 73,430 gallons of diesel fuel. Project construction would represent a "single-event" diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources for this purpose.



³ Based on Appendix A of the CalEEMod User's Guide, Construction consists of several types of off-road equipment. Since the majority of the off-road construction equipment used for construction projects are diesel fueled, CalEEMod assumes all of the equipment operates on diesel fuel.

TABLE 4-5: CONSTRUCTION EQUIPMENT FUEL CONSUMPTION ESTIMATES

Phase Name	Duration (Days)	Equipment	HP Rating	Quantity	Usage Hours	Load Factor	HP- hrs/day	Total Fuel Consumption
Site Preparation 10		Rubber Tired Dozers	367	3	8	0.40	3,523	1,904
Site Preparation	10	Crawler Tractors	84	4	8	0.37	995	538
		Graders	148	2	8	0.41	971	2,362
		Excavators	36	2	8	0.38	219	532
Grading	45	Crawler Tractors	84	2	8	0.37	497	1,210
		Scrapers	423	6	8	0.48	9,746	23,706
		Rubber Tired Dozers	367	1	8	0.40	1,174	2,857
	285	Forklifts	82	3	8	0.20	394	6,064
		Generator Sets	14	2	8	0.74	166	2,554
Building Construction		Cranes	367	1	8	0.29	851	13,117
		Welders	46	2	8	0.45	331	5,102
		Tractors/Loaders/Backhoes	84	3	8	0.37	746	11,491
		Pavers	81	2	8	0.42	544	588
Paving	20	Paving Equipment	89	2	8	0.36	513	554
		Rollers	36	2	8	0.38	219	237
Architectural Coating	Architectural Coating 40 Air Compressors 37 2 8 0.48 284						614	
CONSTRUCTION FUEL DEMAND (GALLONS DIESEL FUEL) 73								

4.3.4 CONSTRUCTION TRIPS AND VMT

Construction generates on-road vehicle emissions from vehicle usage for workers and vendors commuting to and from the site. The number of workers and vendor trips are presented below in Table 4-6. It should be noted that for Vendor Trips, specifically, CalEEMod only assigns Vendor Trips to the Building Construction phase. Vendor trips would likely occur during all phases of construction. As such, the CalEEMod defaults for Vendor Trips have been adjusted based on a ratio of the total vendor trips to the number of days of each subphase of activity.

Worker Trips Vendor Trips Hauling Trips Construction Activity Per Day Per Day Per Day 18 2 0 **Site Preparation** Grading 33 9 O **Building Construction** 183 60 0 0 15 0 Paving 37 0 **Architectural Coating** 0

TABLE 4-6: CONSTRUCTION TRIPS AND VMT

4.3.5 CONSTRUCTION WORKER FUEL ESTIMATES

With respect to estimated VMT for the Project, the construction worker trips (personal vehicles used by workers commuting to the Project from home) would generate an estimated 1,037,573 VMT during the 16 months of construction (20). Based on CalEEMod methodology, it is assumed that 50% of all construction worker trips are from light-duty-auto vehicles (LDA), 25% are from light-duty-trucks (LDT1⁴), and 25% are from light-duty-trucks (LDT2⁵). Data regarding Project related construction worker trips were based on CalEEMod defaults utilized within the AQIA.

Vehicle fuel efficiencies for LDA, LDT1, and LDT2 were estimated using information generated within the 2021 version of the EMFAC developed by CARB. EMFAC2021 is a mathematical model that was developed to calculate emission rates, fuel consumption, and VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from on-road mobile sources (22). EMFAC2021 was run for the LDA, LDT1, and LDT2 vehicle class within the California sub-area for the 2023 and 2024 calendar years. Data from EMFAC2021 is shown in Appendix 4.3.



⁴ Vehicles under the LDT1 category have a gross vehicle weight rating (GVWR) of less than 6,000 lbs. and equivalent test weight (ETW) of less than or equal to 3,750 lbs.

⁵ Vehicles under the LDT2 category have a GVWR of less than 6,000 lbs. and ETW between 3,751 lbs. and 5,750 lbs.

TABLE 4-7: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES

Year	Construction Activity	Duration (Days)	Worker Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)		
				LDA					
	Site Preparation	10	9	18.5	1,665	30.60	54		
	Grading	45	17	18.5	14,153	30.60	462		
	Building Construction	204	92	18.5	347,208	30.60	11,346		
				LDT1					
2023	Site Preparation	10	5	18.5	925	24.15	38		
2023	Grading	45	9	18.5	7,493	24.15	310		
	Building Construction	204	46	18.5	173,604	24.15	7,188		
	LDT2								
	Site Preparation	10	5	18.5	925	23.88	39		
	Grading	45	9	18.5	7,493	23.88	314		
	Building Construction	204	46	18.5	173,604	23.88	7,269		
	LDA								
	Building Construction	81	92	18.5	137,862	31.51	4,376		
	Paving	20	8	18.5	2,960	31.51	94		
	Architectural Coating	40	19	18.5	14,060	31.51	446		
	LDT1								
2024	Building Construction	81	46	18.5	68,931	24.62	2,800		
2024	Paving	20	4	18.5	1,480	24.62	60		
	Architectural Coating	40	10	18.5	7,400	24.62	301		
				LDT2					
	Building Construction	81	46	18.5	68,931	24.57	2,805		
	Paving	20	4	18.5	1,480	24.57	60		
	Architectural Coating	40	10	18.5	7,400	24.57	301		
	TOTAL CONSTRUCTION WORKER FUEL CONSUMPTION								



As previously shown in Table 4-7, the estimated annual fuel consumption resulting from Project construction worker trips is 38,264 gallons during full construction of the Project. It should be noted that construction worker trips would represent a "single-event" gasoline fuel demand and would not require on-going or permanent commitment of fuel resources for this purpose.

4.3.6 CONSTRUCTION VENDOR FUEL ESTIMATES

With respect to estimated VMT, the construction vendor trips (vehicles that deliver materials to the site during construction) would generate an estimated 179,214 VMT along area roadways for the Project over the duration of construction activity (20). It is assumed that 50% of all vendor trips are from medium-heavy duty trucks (MHD) and 50% are from heavy-heavy duty trucks (HHD). These assumptions are consistent with the CalEEMod defaults utilized within the within the AQIA (20). Vehicle fuel efficiencies for MHDs and HHDs were estimated using information generated within EMFAC2021. EMFAC2021 was run for the MHD and HHD vehicle classes within the California sub-area for the 2023 and 2024 calendar years. Data from EMFAC2021 is shown in Appendix 4.3.

TABLE 4-8: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES

Year	Construction Activity	Duration (Days)	Vendor Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)		
	MHD								
	Site Preparation	10	1	10.2	102	8.40	12		
	Grading	45	5	10.2	2,295	8.40	273		
2022	Building Construction	204	30	10.2	62,424	8.40	7,431		
2023	HHD (Vendor)								
	Site Preparation	10	1	10.2	102	6.04	17		
	Grading	45	5	10.2	2,295	6.04	380		
	Building Construction	204	30	10.2	62,424	6.04	10,331		
	MHD								
2024	Building Construction	81	30	10.2	24,786	8.47	2,925		
2024				HHD					
	Building Construction	81	30	10.2	24,786	6.12	4,049		
	TOTAL CONSTRUCTION VENDOR FUEL CONSUMPTION								

Based on Table 4-8, it is estimated that 25,418 gallons of fuel will be consumed related to construction vendor trips during full construction of the Project. It should be noted that Project construction vendor trips would represent a "single-event" diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources for this purpose.



4.3.7 CONSTRUCTION ENERGY EFFICIENCY/CONSERVATION MEASURES

Starting in 2014, CARB adopted the nation's first regulation aimed at cleaning up off-road construction equipment such as bulldozers, graders, and backhoes. These requirements ensure fleets gradually turnover the oldest and dirtiest equipment to newer, cleaner models and prevent fleets from adding older, dirtier equipment. As such, the equipment used for Project construction would conform to CARB regulations and California emissions standards. It should also be noted that there are no unusual Project characteristics or construction processes that would require the use of equipment that would be more energy intensive than is used for comparable activities; or equipment that would not conform to current emissions standards (and related fuel efficiencies). Equipment employed in construction of the Project would therefore not result in inefficient wasteful, or unnecessary consumption of fuel.

Construction contractors would be required to comply with applicable CARB regulation regarding retrofitting, repowering, or replacement of diesel off-road construction equipment. Additionally, CARB has adopted the Airborne Toxic Control Measure to limit heavy-duty diesel motor vehicle idling in order to reduce public exposure to diesel particulate matter and other Toxic Air Contaminants. Compliance with anti-idling and emissions regulations would result in a more efficient use of construction-related energy and the minimization or elimination of wasteful or unnecessary consumption of energy. Idling restrictions and the use of newer engines and equipment would result in less fuel combustion and energy consumption.

Additional construction-source energy efficiencies would occur due to required California regulations and best available control measures (BACM). For example, CCR Title 13, Motor Vehicles, section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than five minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. Section 2449(d)(3) requires that grading plans shall reference the requirement that a sign shall be posted on-site stating that construction workers need to shut off engines at or before five minutes of idling." In this manner, construction equipment operators are required to be informed that engines are to be turned off at or prior to five minutes of idling. Enforcement of idling limitations is realized through periodic site inspections conducted by City building officials, and/or in response to citizen complaints.

A full analysis related to the energy needed to form construction materials is not included in this analysis due to a lack of detailed Project-specific information on construction materials. At this time, an analysis of the energy needed to create Project-related construction materials would be extremely speculative and thus has not been prepared.

In general, construction processes promote conservation and efficient use of energy by reducing raw materials demands, with related reduction in energy demands associated with raw materials extraction, transportation, processing, and refinement. Use of materials in bulk reduces energy demands associated with preparation and transport of construction materials as well as the transport and disposal of construction waste and solid waste in general, with corollary reduced demands on area landfill capacities and energy consumed by waste transport and landfill operations.



4.4 OPERATIONAL ENERGY DEMANDS

Energy consumption in support of or related to Project operations would include transportation fuel demands (fuel consumed by passenger car and truck vehicles accessing the Project site), fuel demands from operational equipment, and facilities energy demands (energy consumed by building operations and site maintenance activities).

4.4.1 TRANSPORTATION FUEL DEMANDS

Energy that would be consumed by Project-generated traffic is a function of total VMT and estimated vehicle fuel economies of vehicles accessing the Project site. The VMT per vehicle class can be determined by evaluated in the vehicle fleet mix and the total VMT. As with worker and vendors trips, operational vehicle fuel efficiencies were estimated using information generated within EMFAC2021 developed by CARB (22). EMFAC2021 was run for the Riverside County area for the 2024 calendar year. Data from EMFAC2021 is shown in Appendix 4.3.

In order to account for the possibility of refrigerated uses (cold storage) that would be accommodated by the 130,447 sf of high-cube cold storage warehouse proposed, it is assumed that all trucks accessing this land use are presumed to also have transport refrigeration units (TRUs). Therefore, for modeling purposes 100 two-way truck trips (50 trucks) are assumed to be trucks with TRUs. TRUs are also accounted for during on-site and off-site travel. The TRU calculations are based on EMFAC2021.

The estimated transportation energy demands are summarized on Tables 4-9. As summarized on Table 4-9 the Project would result in 6,676,878 annual VMT and an estimated annual fuel consumption of 555,544 gallons of fuel.

TABLE 4-9: TOTAL PROJECT-GENERATED TRAFFIC ANNUAL FUEL CONSUMPTION

Vehicle Type	Average Vehicle Fuel Economy (mpg)	Annual VMT	Estimated Annual Fuel Consumption (gallons)
LDA	31.51	2,267,375	71,966
LDT1	24.62	183,637	7,458
LDT2	24.57	901,652	36,694
MDV	15.52	736,030	47,438
MCY	15.52	108,436	6,989
LHD1	16.16	416,301	25,758
LHD2	15.52	117,533	7,575
MHD	8.47	281,268	33,194
HHD	6.12	1,664,646	271,960
TRUs			46,512
	TOTAL (ALL VEHICLES)	6,676,878	555,544



4.4.2 On-Site Cargo Handling Equipment Fuel Demands

It is common for industrial buildings to require the operation of exterior cargo handling equipment in the building's truck court areas. For this particular Project, on-site modeled operational equipment includes up to one (1) 175 horsepower (hp), natural gas-powered cargo handling equipment – port tractor operating at 4 hours a day⁶ for 365 days of the year.

Project operational activity estimates and associated fuel consumption estimates are based on the annual EMFAC2021 offroad emissions for the 2024 operational year and was used to derive the total annual fuel consumption associated on-site equipment. As presented in Table 4-10, Project on-site equipment would consume an estimated 4,642 gallons of natural gas.

EMFAC2021 EMFAC2021 Days of **Total Fuel** Usage Fuel Equipment Quantity Activity **Hours** Operation Consumption Consumption (hrs./yr) (gal./yr) Cargo Handling Equipment 1 4 365 17,909 5,633 4,642 - Port Tractor ON-SITE CARGO HANDLING EQUIPMENT FUEL DEMAND (GALLONS FUEL) 4,642

TABLE 4-10: ON-SITE CARGO HANDLING EQUIPMENT FUEL CONSUMPTION ESTIMATES

4.4.3 FACILITY ENERGY DEMANDS

Project building operations activities would result in the consumption of natural gas and electricity, which would be supplied to the Project by SCE and SoCalGas. Annual natural gas and electricity demands of the Project are summarized in Table 4-11. As summarized on Table 4-11 the Project would result in 7,007,171 kBTU/year of natural gas and 4,253,662 kWh/year of electricity.

TABLE 4-13: PROJECT ANNUAL OPERATIONAL ENERGY DEMAND SUMMARY

Land Use	Natural Gas Demand (kBTU/year)	Electricity Demand (kWh/year)
High-Cube Fulfillment (70%)	4,464,321	1,400,845
High-Cube Cold Storage (30%)	2,542,850	2,852,817
Parking Lot	0	0
Other Asphalt Surfaces	0	0
Landscape Area	0	0
TOTAL PROJECT ENERGY DEMAND	7,007,171	4,253,662

⁶ Based on Table II-3, Port and Rail Cargo Handling Equipment Demographics by Type, from CARB's Technology Assessment: Mobile Cargo Handling Equipment document, a single piece of equipment could operate up to 2 hours per day (Total Average Annual Activity divided by Total Number Pieces of Equipment). As such, the analysis conservatively assumes that the tractor/loader/backhoe would operate up to 4 hours per day.

14166-08 EA Report

URBAN

4.4.4 OPERATIONAL ENERGY EFFICIENCY/CONSERVATION MEASURES

Energy efficiency/energy conservation attributes of the Project would be complemented by increasingly stringent state and federal regulatory actions addressing vehicle fuel economies and vehicle emissions standards; and enhanced building/utilities energy efficiencies mandated under California building codes (e.g., Title24, California Green Building Standards Code).

ENHANCED VEHICLE FUEL EFFICIENCIES

Project annual fuel consumption estimates presented previously in Table 4-9 represent likely potential maximums that would occur for the Project. Under subsequent future conditions, average fuel economies of vehicles accessing the Project site can be expected to improve as older, less fuel-efficient vehicles are removed from circulation, and in response to fuel economy and emissions standards imposed on newer vehicles entering the circulation system.

Enhanced fuel economies realized pursuant to federal and state regulatory actions, and related transition of vehicles to alternative energy sources (e.g., electricity, natural gas, biofuels, hydrogen cells) would likely decrease future gasoline fuel demands per VMT. Location of the Project proximate to regional and local roadway systems tends to reduce VMT within the region, acting to reduce regional vehicle energy demands.

4.5 SUMMARY

4.5.1 CONSTRUCTION ENERGY DEMANDS

The estimated power cost of on-site electricity usage during the construction of the Project is assumed to be approximately \$33,882.09. Additionally, based on the assumed power cost, it is estimated that the total electricity usage during construction, after full Project build-out, is calculated to be approximately 257,228 kWh.

Construction equipment used by the Project would result in single event consumption of approximately 73,430 gallons of diesel fuel. Construction equipment use of fuel would not be atypical for the type of construction proposed because there are no aspects of the Project's proposed construction process that are unusual or energy-intensive, and Project construction equipment would conform to the applicable CARB emissions standards, acting to promote equipment fuel efficiencies.

CCR Title 13, Title 13, Motor Vehicles, section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than 5 minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. BACMs inform construction equipment operators of this requirement. Enforcement of idling limitations is realized through periodic site inspections conducted by City building officials, and/or in response to citizen complaints.

Construction worker trips for full construction of the Project would result in the estimated fuel consumption of 38,264 gallons of fuel. Additionally, fuel consumption from construction vendor trips (MHDs and HHDs) will total approximately 25,418 gallons. Diesel fuel would be supplied by County and regional commercial vendors. Indirectly, construction energy efficiencies and energy



conservation would be achieved using bulk purchases, transport and use of construction materials. The 2021 IEPR released by the CEC has shown that fuel efficiencies are getting better within on and off-road vehicle engines due to more stringent government requirements (15). As supported by the preceding discussions, Project construction energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

4.5.2 OPERATIONAL ENERGY DEMANDS

TRANSPORTATION ENERGY DEMANDS

Annual vehicular trips and related VMT generated by the operation of the Project would result in a fuel demand of 555,544 gallons of fuel.

Fuel would be provided by current and future commercial vendors. Trip generation and VMT generated by the Project are consistent with other industrial uses of similar scale and configuration, as reflected respectively in the Institute of Transportation Engineers (ITE) Trip Generation Manual (11th Ed., 2021); and CalEEMod. As such, Project operations would not result in excessive and wasteful vehicle trips and VMT, nor excess and wasteful vehicle energy consumption compared to other industrial uses.

It should be noted that the state strategy for the transportation sector for medium and heavy-duty trucks is focused on making trucks more efficient and expediting truck turnover rather than reducing VMT from trucks. This is in contrast to the passenger vehicle component of the transportation sector where both per-capita VMT reductions and an increase in vehicle efficiency are forecasted to be needed to achieve the overall state emissions reductions goals.

Heavy duty trucks involved in goods movements are generally controlled on the technology side and through fleet turnover of older trucks and engines to newer and cleaner trucks and engines. The first battery-electric heavy-heavy duty trucks are being tested this year and SCAQMD is looking to integrate this new technology into large-scale truck operations. The following state strategies reduce GHG emissions from the medium and heavy-duty trucks:

- CARB's Mobile Source Strategy focuses on reducing GHGs through the transition to zero and low emission vehicles and from medium-duty and heavy-duty trucks.
- CARB's Sustainable Freight Action Plan establishes a goal to improve freight efficiency by 25% by 2030, deploy over 100,000 freight vehicles and equipment capable of zero emission operation and maximize both zero and near-zero emission freight vehicles and equipment powered by renewable energy by 2030.
- CARB's Emissions Reduction Plan for Ports and Goods Movement (Goods Movement Plan) in California focuses on reducing heavy-duty truck-related emissions focus on establishment of emissions standards for trucks, fleet turnover, truck retrofits, and restriction on truck idling (CARB 2006). While the focus of Goods Movement Plan is to reduce criteria air pollutant and air toxic emissions, the strategies to reduce these pollutants would also generally have a beneficial effect in reducing GHG emissions.
- CARB's On-Road Truck and Bus Regulation (2010) requires diesel trucks and buses that operate in California to be upgraded to reduce emissions. Newer heavier trucks and buses must meet particulate matter filter requirements beginning January 1, 2012. Lighter and older heavier trucks



- must be replaced starting January 1, 2015. By January 1, 2023, nearly all trucks and buses will need to have 2010 model year engines or equivalent (27).
- CARB's Heavy-Duty (Tractor-Trailer) GHG Regulation requires SmartWay tractor trailers that include idle-reduction technologies, aerodynamic technologies, and low-rolling resistant tires that would reduce fuel consumption and associated GHG emissions.

The proposed Project would implement project design features that would facilitate the accessibility, parking, and loading of trucks on-site.

Enhanced fuel economies realized pursuant to federal and state regulatory actions, and related transition of vehicles to alternative energy sources (e.g., electricity, natural gas, biofuels, hydrogen cells) would likely decrease future gasoline fuel demands per VMT. Location of the Project proximate to regional and local roadway systems tends to reduce VMT within the region, acting to reduce regional vehicle energy demands. The Project would implement sidewalks, facilitating and encouraging pedestrian access. Facilitating pedestrian and bicycle access would reduce VMT and associated energy consumption. In compliance with the California Green Building Standards Code and City requirements, the Project would promote the use of bicycles as an alternative mean of transportation by providing short-term and/or long-term bicycle parking accommodations. As supported by the preceding discussions, Project transportation energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

ON-SITE CARGO HANDLING EQUIPMENT FUEL DEMANDS

As previously stated, it is common for industrial buildings to require the operation of exterior cargo handling equipment in the building's truck court areas. On-site cargo handling equipment used by the Project would result in approximately 4,642 gallons of natural gas. On-site equipment use of fuel would not be atypical for the type of construction proposed because there are no aspects of the Project's proposed operations that are unusual or energy-intensive, and Project on-site equipment would conform to the applicable CARB emissions standards, acting to promote equipment fuel efficiencies.

FACILITY ENERGY DEMANDS

Project facility operational energy demands are estimated at: 7,007,171 kBTU/year of natural gas and 4,253,662 kWh/year of electricity. Natural gas would be supplied to the Project by SoCalGas; electricity would be supplied by SCE. The Project proposes conventional industrial uses reflecting contemporary energy efficient/energy conserving designs and operational programs. The Project does not propose uses that are inherently energy intensive and the energy demands in total would be comparable to other industrial uses of similar scale and configuration.

Lastly, the Project will comply with the applicable Title 24 standards. Compliance itself with applicable Title 24 standards will ensure that the Project energy demands would not be inefficient, wasteful, or otherwise unnecessary.



This page intentionally left blank



5 CONCLUSIONS

5.1 ENERGY IMPACT 1

Would the Project result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation?

As supported by the preceding analyses, Project construction and operations <u>would not result in the inefficient</u>, <u>wasteful</u>, <u>or unnecessary consumption of energy</u>. The Project would therefore not cause or result in the need for additional energy producing or transmission facilities. The Project would not engage in wasteful or inefficient uses of energy and aims to achieve energy conservation goals within the State of California; therefore, impacts would be less than significant.

5.2 ENERGY IMPACT 2

Would the Project conflict with or obstruct a state or local plan for renewable energy or energy efficiency?

The Project's consistency with the applicable state and local plans is discussed below.

CONSISTENCY WITH ISTEA

Transportation and access to the Project site is provided by the local and regional roadway systems. The Project would not interfere with, nor otherwise obstruct intermodal transportation plans or projects that may be realized pursuant to the ISTEA because SCAG is not planning for intermodal facilities on or through the Project site.

CONSISTENCY WITH TEA-21

The Project site is located along major transportation corridors with proximate access to the Interstate freeway system. The site selected for the Project facilitates access, acts to reduce vehicle miles traveled, takes advantage of existing infrastructure systems, and promotes land use compatibilities through collocation of similar uses. The Project supports the strong planning processes emphasized under TEA-21. The Project is therefore consistent with, and would not otherwise interfere with, nor obstruct implementation of TEA-21.

CONSISTENCY WITH IEPR

Electricity would be provided to the Project by SCE. SCE's *Clean Power and Electrification Pathway* (CPEP) white paper builds on existing state programs and policies. As such, the Project is consistent with, and would not otherwise interfere with, nor obstruct implementation the goals presented in the 2021 IEPR.

Additionally, the Project will comply with the applicable Title 24 standards which would ensure that the Project energy demands would not be inefficient, wasteful, or otherwise unnecessary.



As such, development of the proposed Project would support the goals presented in the 2020 IEPR.



CONSISTENCY WITH STATE OF CALIFORNIA ENERGY PLAN

The Project site is located along major transportation corridors with proximate access to the Interstate freeway system. The site selected for the Project facilitates access and takes advantage of existing infrastructure systems. The Project therefore supports urban design and planning processes identified under the State of California Energy Plan, is consistent with, and would not otherwise interfere with, nor obstruct implementation of the State of California Energy Plan.

CONSISTENCY WITH CALIFORNIA CODE TITLE 24, PART 6, ENERGY EFFICIENCY STANDARDS

The 2022 version of Title 24 was adopted by the CEC and will become effective on January 1, 2023. As the Project building construction is anticipated in 2023, it is presumed that the Project would be required to comply with the Title 24 standards in place at that time. Therefore, the Project is would not result in a significant impact on energy resources (16). The proposed Project would be subject to Title 24 standards.

CONSISTENCY WITH CALIFORNIA CODE TITLE 24, PART 11, CALGREEN

As previously stated, CCR, Title 24, Part 11: CALGreen is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on January 1, 2009, and is administered by the California Building Standards Commission. CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2019 California Green Building Code Standards that became effective January 1, 2020⁷. The proposed Project would be subject to CALGreen standards.

CONSISTENCY WITH AB 1493

AB 1493 is not applicable to the Project as it is a statewide measure establishing vehicle emissions standards. No feature of the Project would interfere with implementation of the requirements under AB 1493.

CONSISTENCY WITH RPS

California's RPS is not applicable to the Project as it is a statewide measure that establishes a renewable energy mix. No feature of the Project would interfere with implementation of the requirements under RPS.

CONSISTENCY WITH SB 350

The proposed Project would use energy from SCE, which have committed to diversify their portfolio of energy sources by increasing energy from wind and solar sources. No feature of the Project would interfere with implementation of SB 350. Additionally, the Project would be designed and constructed to implement the energy efficiency measures for new industrial developments and would include several measures designed to reduce energy consumption.

14166-08 EA Report URBA

43

⁷ At the time of this study, the 2019 California Green Building Standard Code was the most recent and available edition. The 2022 California Green Building Standard Code will be published July 1, 2022, with an anticipated effective date of January 1, 2023. As construction of the Project is anticipated to be completed in 2024, it is presumed that the Project would be required to comply with the Title 24 standards in place at that time.

As shown above, the Project would not conflict with any of the state or local plans. As such, a less than significant impact is expected.



This page intentionally left blank



6 REFERENCES

- 1. Association of Environmental Professionals. 2020 CEQA California Environmental Quality Act. 2020.
- 2. **Administration, U.S. Energy Information.** California State Profile and Energy Estimates. [Online] https://www.eia.gov/state/data.php?sid=CA#ConsumptionExpenditures.
- 3. California Energy Commission. Transportation Energy Demand Forecast 2018-2030. 2018.
- 4. Alternate Fuels Data Center. U.S. Department of Energy. [Online] https://afdc.energy.gov/states/ca.
- 5. U.S. Energy Information Administration. California Energy Consumption by End-Use Sector. *California State Profile and Energy Estimates*. [Online] https://www.eia.gov/state/?sid=CA#tabs-2.
- 6. California Energy Commission. 2020 Total System Electric Generation. *CA.gov.* [Online] https://www.energy.ca.gov/data-reports/energy-almanac/california-electricity-data/2020-total-system-electric-generation.
- 7. U.S. Energy Information Administration. California State Profile and Energy Estimates . [Online] https://www.eia.gov/state/?sid=CA.
- 8. California Energy Commission. 2013 Integrated Energy Policy Report. [Online] 2013. http://www.energy.ca.gov/2013publications/CEC-100-2013-001/CEC-100-2013-001-CMF.pdf.
- 9. California ISO. Understanding the ISO. [Online] http://www.caiso.com/about/Pages/OurBusiness/UnderstandingtheISO/default.aspx.
- 10. California Energy Commission. California Energy Almanac. *Utility Energy Supply Plans from 2013*. [Online] https://www.energy.ca.gov/almanac/electricity_data/s-2_supply_forms_2013/.
- 11. Southern Californai Edison. 2019 Power Content Label. *Southern California Edison*. [Online] https://www.sce.com/sites/default/files/inline-files/SCE_2019PowerContentLabel.pdf.
- 12. California Public Utilities Commission. Natural Gas and California. [Online] http://www.cpuc.ca.gov/general.aspx?id=4802.
- 13. Department of Motor Vehicles. State of California Department of Motor Vehicles Statistics For Publication January Through December 2021. 2021.
- 14. U.S. Energy Information Administration. California Analysis. *Energy Information Administration*. [Online] https://www.eia.gov/beta/states/states/ca/analysis.
- 15. California Energy Commission Staff. 2020 Integrated Energy Policy Report Update. [Online] 2020. file:///C:/Users/atamase/Downloads/TN237269_20210323T095732_Final%202020%20Integrated %20%20Energy%20Policy%20Report%20%20Update%20Volume%20III%20California%20E%20(1).p df.
- 16. The California Energy Commission. 2022 Building Energy Efficiency Standards. *California Energy Commission*. [Online] 2022. https://www.energy.ca.gov/programs-and-topics/programs/building-energy-efficiency-standards/2022-building-energy-efficiency.
- 17. California Energy Commission. Renewables Portfolio Standard (RPS). [Online] 2002. http://www.energy.ca.gov/portfolio/.
- 18. State of California. California Environmental Quality Act Guideline, California Public Resources Code, Title 14, Division 6, Chapter 3,.
- 19. Association of Environmental Professionals. 2019 CEQA California Environmental Quality Act. 2019.
- 20. Urban Crossroads, Inc. Harvill & Water Warehouse Air Quality Impact Analysis. 2022.



- 21. California Air Pollution Control Officers Association (CAPCOA). California Emissions Estimator Model (CalEEMod). [Online] May 2022. www.caleemod.com.
- 22. California Department of Transportation. EMFAC Software. [Online] http://www.dot.ca.gov/hq/env/air/pages/emfac.htm.
- 23. State of California. 2019 CEQA California Environmental Quality Act. 2019.
- 24. Pray, Richard. 2022 National Construction Estimator. Carlsbad: Craftsman Book Company, 2022.
- 25. Southern California Edison. Schedule GS-1 General Service. Regulatory Information Rates Pricing.

 [Online] https://library.sce.com/content/dam/sce-doclib/public/regulatory/tariff/electric/schedules/general-service-&-industrial-rates/ELECTRIC_SCHEDULES_GS-1.pdf.
- 26. California Air Resources Board. Methods to Find the Cost-Effectiveness of Funding Air Quality Projects For Evaluating Motor Vehicle Registration Fee Projects And Congestion Mitigation and Air Quality Improvement (CMAQ) Projects, Emission Factor Tables. 2018.
- 27. —. Truck and Bus Regulation. [Online] https://ww2.arb.ca.gov/our-work/programs/truck-and-bus-regulation.



This page intentionally left blank



7 CERTIFICATIONS

The contents of this energy analysis report represent an accurate depiction of the environmental impacts associated with the proposed Harvill & Water Warehouse. The information contained in this energy analysis report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at https://newsate.com.

Haseeb Qureshi
Associate Principal
Urban Crossroads, Inc.
hqureshi@urbanxroads.com

EDUCATION

Master of Science in Environmental Studies California State University, Fullerton • May 2010

Bachelor of Arts in Environmental Analysis and Design University of California, Irvine • June 2006

PROFESSIONAL AFFILIATIONS

AEP – Association of Environmental Planners AWMA – Air and Waste Management Association ASTM – American Society for Testing and Materials

PROFESSIONAL CERTIFICATIONS

Planned Communities and Urban Infill – Urban Land Institute • June 2011
Indoor Air Quality and Industrial Hygiene – EMSL Analytical • April 2008
Principles of Ambient Air Monitoring – California Air Resources Board • August 2007
AB2588 Regulatory Standards – Trinity Consultants • November 2006
Air Dispersion Modeling – Lakes Environmental • June 2006



This page intentionally left blank



APPENDIX 4.1:

CALEEMOD CONSTRUCTION EMISSIONS MODEL OUTPUTS



14166 Harvill and Water Construction Detailed Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.1. Construction Emissions Compared Against Thresholds
 - 2.2. Construction Emissions by Year, Unmitigated
- 3. Construction Emissions Details
 - 3.1. Site Preparation (2023) Unmitigated
 - 3.3. Grading (2023) Unmitigated
 - 3.5. Building Construction (2023) Unmitigated
 - 3.7. Building Construction (2024) Unmitigated
 - 3.9. Paving (2024) Unmitigated
 - 3.11. Architectural Coating (2024) Unmitigated

- 4. Operations Emissions Details
 - 4.10. Soil Carbon Accumulation By Vegetation Type
 - 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
 - 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
 - 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated
- 5. Activity Data
 - 5.1. Construction Schedule
 - 5.2. Off-Road Equipment
 - 5.2.1. Unmitigated
 - 5.3. Construction Vehicles
 - 5.3.1. Unmitigated
 - 5.4. Vehicles
 - 5.4.1. Construction Vehicle Control Strategies
 - 5.5. Architectural Coatings
 - 5.6. Dust Mitigation
 - 5.6.1. Construction Earthmoving Activities
 - 5.6.2. Construction Earthmoving Control Strategies

- 5.7. Construction Paving
- 5.8. Construction Electricity Consumption and Emissions Factors
- 5.18. Vegetation
 - 5.18.1. Land Use Change
 - 5.18.1.1. Unmitigated
 - 5.18.1. Biomass Cover Type
 - 5.18.1.1. Unmitigated
 - 5.18.2. Sequestration
 - 5.18.2.1. Unmitigated
- 6. Climate Risk Detailed Report
 - 6.1. Climate Risk Summary
 - 6.2. Initial Climate Risk Scores
 - 6.3. Adjusted Climate Risk Scores
 - 6.4. Climate Risk Reduction Measures
- 7. Health and Equity Details
 - 7.1. CalEnviroScreen 4.0 Scores
 - 7.2. Healthy Places Index Scores

- 7.3. Overall Health & Equity Scores
- 7.4. Health & Equity Measures
- 7.5. Evaluation Scorecard
- 8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	14166 Harvill and Water Construction
Lead Agency	_
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.50
Precipitation (days)	9.00
Location	33.81812656754187, -117.24765408472518
County	Riverside-South Coast
City	Unincorporated
Air District	South Coast AQMD
Air Basin	South Coast
TAZ	5579
EDFZ	11
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)		Special Landscape Area (sq ft)	Population	Description
Unrefrigerated Warehouse-No Rail	435	1000sqft	9.98	434,823	135,180	_	_	_
Parking Lot	253	Space	2.28	0.00	0.00	_	_	_

Other Asphalt	4.72	Acre	4.72	0.00	0.00	_	_	_
Surfaces								

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

				<i>J</i> ,			,		J.						_			
Un/Mit.	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	2.17	55.6	18.9	39.7	0.05	0.52	3.38	3.89	0.48	0.81	1.30	_	8,315	8,315	0.31	0.41	17.8	8,464
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	2.10	55.5	42.1	79.2	0.15	0.52	5.91	6.01	0.48	2.74	2.85	_	16,588	16,588	0.65	0.42	0.46	16,710
Average Daily (Max)	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	1.29	6.33	14.7	28.5	0.04	0.25	2.35	2.60	0.24	0.63	0.86	_	6,298	6,298	0.24	0.27	4.34	6,388
Annual (Max)	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_	-
Unmit.	0.24	1.16	2.68	5.21	0.01	0.05	0.43	0.48	0.04	0.11	0.16	_	1,043	1,043	0.04	0.04	0.72	1,058

2.2. Construction Emissions by Year, Unmitigated

Year	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily - Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	1.88	1.71	16.0	35.5	0.04	0.34	2.90	3.24	0.32	0.70	1.02	_	7,509	7,509	0.27	0.39	16.8	7,650
2024	2.17	55.6	18.9	39.7	0.05	0.52	3.38	3.89	0.48	0.81	1.30	_	8,315	8,315	0.31	0.41	17.8	8,464
Daily - Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	2.05	2.00	42.1	79.2	0.15	0.43	5.91	6.01	0.42	2.74	2.85	_	16,588	16,588	0.65	0.39	0.43	16,710
2024	2.10	55.5	19.2	35.3	0.05	0.52	3.38	3.89	0.48	0.81	1.30	_	8,061	8,061	0.31	0.42	0.46	8,193
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	1.29	1.19	14.7	28.5	0.04	0.25	2.35	2.60	0.24	0.63	0.86	_	6,298	6,298	0.24	0.27	4.34	6,388
2024	0.45	6.33	4.29	8.04	0.01	0.10	0.70	0.80	0.10	0.17	0.27	_	1,790	1,790	0.07	0.09	1.61	1,820
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	0.24	0.22	2.68	5.21	0.01	0.05	0.43	0.48	0.04	0.11	0.16	_	1,043	1,043	0.04	0.04	0.72	1,058
2024	0.08	1.16	0.78	1.47	< 0.005	0.02	0.13	0.15	0.02	0.03	0.05	_	296	296	0.01	0.01	0.27	301

3. Construction Emissions Details

3.1. Site Preparation (2023) - Unmitigated

Location	TOG	ROG		СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Off-Road Equipmen		0.64	14.7	28.3	0.05	0.10	_	0.10	0.10	_	0.10	-	5,295	5,295	0.21	0.04	_	5,314
Dust From Material Movemen	_	_	_	_	_	_	5.66	5.66	_	2.69	2.69	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.02	0.40	0.78	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	145	145	0.01	< 0.005	_	146
Dust From Material Movemen		_	_	_	_	_	0.16	0.16	_	0.07	0.07	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.07	0.14	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	-	24.0	24.0	< 0.005	< 0.005	_	24.1
Dust From Material Movemen		_	_	_	_	_	0.03	0.03	_	0.01	0.01	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	-	-	_	_	_
Worker	0.10	0.09	0.11	1.20	0.00	0.00	0.01	0.01	0.00	0.00	0.00	_	236	236	0.01	0.01	0.03	239

										_								
Vendor	< 0.005	< 0.005	0.08	0.02	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	62.9	62.9	< 0.005	0.01	< 0.005	65.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	6.55	6.55	< 0.005	< 0.005	0.01	6.65
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	1.72	1.72	< 0.005	< 0.005	< 0.005	1.80
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	1.09	1.09	< 0.005	< 0.005	< 0.005	1.10
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	0.29	0.29	< 0.005	< 0.005	< 0.005	0.30
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.3. Grading (2023) - Unmitigated

	TOG	ROG	NOx	СО	SO2	PM10E		PM10T				BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
	100	ROO	NOX		002	TIVITOL	TIVITOD	I WITOT	T WIZ.UL	1 1012.50	1 1012.51	D002	NDCCZ	0021	OI I -I	IVZO	IX	0020
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		1.81	40.3	76.5	0.14	0.41	_	0.41	0.40	_	0.40	_	14,744	14,744	0.60	0.12	_	14,794
Dust From Material Movemen	<u> </u>	_	_	_	_	_	3.91	3.91	_	1.11	1.11	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.22	4.96	9.44	0.02	0.05	_	0.05	0.05	_	0.05	_	1,818	1,818	0.07	0.01	_	1,824
Dust From Material Movemen	_	_	_	_	_	_	0.48	0.48	_	0.14	0.14		_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.04	0.91	1.72	< 0.005	0.01	_	0.01	0.01	_	0.01	_	301	301	0.01	< 0.005	_	302
Dust From Material Movement	_	_	_	_	_	_	0.09	0.09	_	0.03	0.03	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	-	_	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.18	0.16	0.20	2.23	0.00	0.00	0.03	0.03	0.00	0.00	0.00	_	439	439	0.02	0.02	0.05	444
Vendor	0.01	0.01	0.35	0.11	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	_	283	283	0.01	0.04	0.02	296
Hauling	0.04	0.02	1.35	0.31	0.01	0.02	0.08	0.10	0.02	0.03	0.05	_	1,123	1,123	0.02	0.18	0.06	1,176
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.02	0.02	0.02	0.29	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	54.8	54.8	< 0.005	< 0.005	0.11	55.5
Vendor	< 0.005	< 0.005	0.04	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	34.9	34.9	< 0.005	0.01	0.04	36.5

Hauling	0.01	< 0.005	0.17	0.04	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	0.01	_	138	138	< 0.005	0.02	0.13	145
Annual	_	_	<u> </u>	_	_	_	<u> </u>	_	_	<u> </u>	_	_	_	_	<u> </u>	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	9.07	9.07	< 0.005	< 0.005	0.02	9.20
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	5.77	5.77	< 0.005	< 0.005	0.01	6.04
Hauling	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	22.9	22.9	< 0.005	< 0.005	0.02	24.0

3.5. Building Construction (2023) - Unmitigated

• · · · · • · · • ·	• • • • • • • • • • • • • • • • • • • •	110 (1.07 0.0	,	.,		,	O O O (.			,	a							
Location	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.68	12.8	18.2	0.03	0.32	_	0.32	0.30	_	0.30	_	2,941	2,941	0.12	0.02	_	2,951
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.68	12.8	18.2	0.03	0.32	_	0.32	0.30	_	0.30	_	2,941	2,941	0.12	0.02	_	2,951
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.38	7.17	10.2	0.02	0.18	_	0.18	0.17	_	0.17	_	1,646	1,646	0.07	0.01	_	1,652
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Off-Road Equipmer		0.07	1.31	1.86	< 0.005	0.03	_	0.03	0.03	_	0.03		273	273	0.01	< 0.005	_	273
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	1.07	0.98	0.96	16.6	0.00	0.00	0.15	0.15	0.00	0.00	0.00	_	2,683	2,683	0.11	0.09	11.5	2,724
Vendor	0.10	0.06	2.20	0.69	0.01	0.03	0.11	0.13	0.03	0.04	0.07	_	1,885	1,885	0.04	0.28	5.25	1,974
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	-	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_	_
Worker	1.02	0.92	1.12	12.6	0.00	0.00	0.15	0.15	0.00	0.00	0.00	_	2,465	2,465	0.12	0.09	0.30	2,495
Vendor	0.09	0.05	2.31	0.70	0.01	0.03	0.11	0.13	0.03	0.04	0.07	_	1,886	1,886	0.04	0.28	0.14	1,970
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_
Worker	0.57	0.51	0.63	7.37	0.00	0.00	0.08	0.08	0.00	0.00	0.00	_	1,397	1,397	0.07	0.05	2.77	1,417
Vendor	0.05	0.03	1.30	0.39	0.01	0.02	0.06	0.08	0.02	0.02	0.04	_	1,055	1,055	0.02	0.16	1.27	1,104
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.10	0.09	0.11	1.34	0.00	0.00	0.02	0.02	0.00	0.00	0.00	_	231	231	0.01	0.01	0.46	235
Vendor	0.01	0.01	0.24	0.07	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	0.01	_	175	175	< 0.005	0.03	0.21	183
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.7. Building Construction (2024) - Unmitigated

Onsite	_	_	_		_	_			_	_			_	-	_	_	-	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.67	12.8	18.2	0.03	0.31	<u> </u>	0.31	0.29	_	0.29	_	2,942	2,942	0.12	0.02	_	2,952
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.67	12.8	18.2	0.03	0.31	_	0.31	0.29	_	0.29	_	2,942	2,942	0.12	0.02	_	2,952
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	-	_	_	_	_	-	-	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.15	2.83	4.03	0.01	0.07	_	0.07	0.07	_	0.07	_	651	651	0.03	0.01	_	653
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.03	0.52	0.74	< 0.005	0.01	_	0.01	0.01	_	0.01	_	108	108	< 0.005	< 0.005	_	108
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	-	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_
Worker	1.03	0.94	0.88	15.2	0.00	0.00	0.15	0.15	0.00	0.00	0.00	_	2,629	2,629	0.11	0.09	10.4	2,669
Vendor	0.08	0.05	2.11	0.66	0.01	0.03	0.11	0.13	0.03	0.04	0.07	_	1,863	1,863	0.04	0.28	5.25	1,952
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	_	_	_	_	_		_	_			_	_	_	_	_	_	_	_
Worker	0.97	0.88	1.04	11.5	0.00	0.00	0.15	0.15	0.00	0.00	0.00	_	2,416	2,416	0.11	0.09	0.27	2,446
Vendor	0.08	0.05	2.21	0.67	0.01	0.03	0.11	0.13	0.03	0.04	0.07	_	1,864	1,864	0.04	0.28	0.14	1,949
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.21	0.19	0.23	2.68	0.00	0.00	0.03	0.03	0.00	0.00	0.00	_	541	541	0.03	0.02	1.00	549
Vendor	0.02	0.01	0.49	0.15	< 0.005	0.01	0.02	0.03	0.01	0.01	0.01	_	412	412	0.01	0.06	0.50	431
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.04	0.04	0.04	0.49	0.00	0.00	0.01	0.01	0.00	0.00	0.00	_	89.6	89.6	< 0.005	< 0.005	0.16	90.8
Vendor	< 0.005	< 0.005	0.09	0.03	< 0.005	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	_	68.2	68.2	< 0.005	0.01	0.08	71.4
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Paving (2024) - Unmitigated

Location	TOG	ROG		СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.29	7.24	10.6	0.01	0.16	_	0.16	0.15	_	0.15	_	1,512	1,512	0.06	0.01	_	1,517
Paving	_	0.92	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Average Daily	_	_	_	-	_	_	_	_	_	_	_	-	_	_	_	_	-	_
Off-Road Equipmen		0.02	0.40	0.58	< 0.005	0.01	_	0.01	0.01	_	0.01	-	82.8	82.8	< 0.005	< 0.005	_	83.1
Paving	_	0.05	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.07	0.11	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	13.7	13.7	< 0.005	< 0.005	_	13.8
Paving	_	0.01	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_
Worker	0.08	0.08	0.07	1.25	0.00	0.00	0.01	0.01	0.00	0.00	0.00	_	216	216	0.01	0.01	0.86	219
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	11.0	11.0	< 0.005	< 0.005	0.02	11.2
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	1.82	1.82	< 0.005	< 0.005	< 0.005	1.85
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Architectural Coating (2024) - Unmitigated

Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.14	2.90	2.57	< 0.005	0.18	_	0.18	0.16	_	0.16	_	356	356	0.01	< 0.005	_	357
Architect ural Coatings	_	53.6	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.14	2.90	2.57	< 0.005	0.18	_	0.18	0.16	_	0.16	_	356	356	0.01	< 0.005	_	357
Architect ural Coatings	_	53.6	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_		_	_	_		_	_	_	_	_	_	
Off-Road Equipmen		0.02	0.32	0.28	< 0.005	0.02	_	0.02	0.02	_	0.02	_	39.0	39.0	< 0.005	< 0.005	_	39.2

Architect	_	5.87	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Coatings																		
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.06	0.05	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	6.46	6.46	< 0.005	< 0.005	_	6.48
Architect ural Coatings	_	1.07	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_	_
Worker	0.21	0.19	0.18	3.05	0.00	0.00	0.03	0.03	0.00	0.00	0.00	_	526	526	0.02	0.02	2.09	534
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	-
Worker	0.19	0.18	0.21	2.31	0.00	0.00	0.03	0.03	0.00	0.00	0.00	_	483	483	0.02	0.02	0.05	489
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	-	_	_	-	_	_	_	_
Worker	0.02	0.02	0.02	0.27	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	53.6	53.6	< 0.005	< 0.005	0.10	54.4
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	< 0.005	< 0.005	0.00	0.00	0.00	_	8.88	8.88	< 0.005	< 0.005	0.02	9.00

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetatio n		ROG				PM10E			PM2.5E			BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

	TOG	ROG	NOx	со	SO2				PM2.5E		PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_		_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_		_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	<u> </u>	_	<u> </u>	_	_	_	<u> </u>	_	_	_	<u> </u>	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Site Preparation	Site Preparation	1/3/2023	1/16/2023	5.00	10.0	_
Grading	Grading	1/17/2023	3/20/2023	5.00	45.0	_
Building Construction	Building Construction	3/21/2023	4/22/2024	5.00	285	_
Paving	Paving	4/23/2024	5/20/2024	5.00	20.0	_
Architectural Coating	Architectural Coating	3/26/2024	5/20/2024	5.00	40.0	_

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Tier 4 Interim	3.00	8.00	367	0.40
Site Preparation	Crawler Tractors	Diesel	Tier 4 Interim	4.00	8.00	84.0	0.37
Grading	Graders	Diesel	Tier 4 Interim	2.00	8.00	148	0.41
Grading	Excavators	Diesel	Tier 3	2.00	8.00	36.0	0.38
Grading	Crawler Tractors	Diesel	Tier 4 Interim	2.00	8.00	84.0	0.37
Grading	Scrapers	Diesel	Tier 4 Interim	6.00	8.00	423	0.48
Grading	Rubber Tired Dozers	Diesel	Tier 4 Interim	1.00	8.00	367	0.40
Building Construction	Forklifts	Diesel	Tier 4 Interim	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Tier 3	2.00	8.00	14.0	0.74
Building Construction	Cranes	Diesel	Tier 4 Interim	1.00	8.00	367	0.29
Building Construction	Welders	Diesel	Tier 3	2.00	8.00	46.0	0.45
Building Construction	Tractors/Loaders/Backh oes	Diesel	Tier 4 Interim	3.00	8.00	84.0	0.37
Paving	Pavers	Diesel	Tier 4 Interim	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Tier 4 Interim	2.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Tier 3	2.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Tier 3	2.00	8.00	37.0	0.48

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	_	_	_	_
Site Preparation	Worker	17.5	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	2.00	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	0.00	_	HHDT

Grading	_	_	_	_
Grading	Worker	32.5	18.5	LDA,LDT1,LDT2
Grading	Vendor	9.00	10.2	HHDT,MHDT
Grading	Hauling	15.8	20.0	HHDT
Grading	Onsite truck	0.00	_	HHDT
Building Construction	_	_	_	_
Building Construction	Worker	183	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	60.0	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	0.00	_	HHDT
Paving	_	_	_	_
Paving	Worker	15.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	0.00	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	0.00	_	HHDT
Architectural Coating	_	_	_	_
Architectural Coating	Worker	36.5	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	0.00	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	0.00	_	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	665,950	221,983	18,287

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (Cubic Yards)	Material Exported (Cubic Yards)	Acres Graded (acres)	Material Demolished (sq. ft.)	Acres Paved (acres)
Site Preparation	0.00	0.00	35.0	0.00	_
Grading	5,686	0.00	383	0.00	_
Paving	0.00	0.00	0.00	0.00	7.00

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	3	74%	74%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Unrefrigerated Warehouse-No Rail	0.00	0%
Parking Lot	2.28	100%
Other Asphalt Surfaces	4.72	100%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2023	0.00	532	0.03	< 0.005

2024	0.00	532	0.03	< 0.005

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres
vegetation Land Ose Type	vegetation our type	ilitial Acres	i ilai Acies

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres
Biomaco Covor Typo	Titlat / toroo	i iliai rioloo

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)
			restation of the contract (country contract)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	29.1	annual days of extreme heat
Extreme Precipitation	1.95	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	4	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack	N/A	N/A	N/A	N/A
Air Quality	0	0	0	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	4	1	1	4

Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack	N/A	N/A	N/A	N/A
Air Quality	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	_
AQ-Ozone	95.3
AQ-PM	55.1
AQ-DPM	13.9
Drinking Water	10.2
Lead Risk Housing	54.6
Pesticides	52.5
Toxic Releases	43.8
Traffic	90.2

Effect Indicators	_
CleanUp Sites	60.4
Groundwater	14.3
Haz Waste Facilities/Generators	70.9
Impaired Water Bodies	0.00
Solid Waste	0.00
Sensitive Population	_
Asthma	66.5
Cardio-vascular	91.0
Low Birth Weights	49.3
Socioeconomic Factor Indicators	_
Education	93.2
Housing	80.1
Linguistic	84.3
Poverty	84.1
Unemployment	93.1

7.2. Healthy Places Index Scores

ne maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.	
Indicator	Result for Project Census Tract
Economic	_
Above Poverty	8.712947517
Employed	6.274862056
Education	_
Bachelor's or higher	1.860644168
High school enrollment	100
Preschool enrollment	13.02450917
1 Toda Toda Citi Citi Citi Citi Citi Citi Citi Cit	10.02.100017

Transportation	_
Auto Access	65.16104196
Active commuting	54.20248941
Social	
2-parent households	54.04850507
Voting	3.259335301
Neighborhood	_
Alcohol availability	90.15783395
Park access	8.558963172
Retail density	9.829334018
Supermarket access	10.3554472
Tree canopy	2.104452714
Housing	_
Homeownership	46.43911202
Housing habitability	15.55241884
Low-inc homeowner severe housing cost burden	28.37161555
Low-inc renter severe housing cost burden	2.322597203
Uncrowded housing	11.35634544
Health Outcomes	_
Insured adults	4.79917875
Arthritis	24.0
Asthma ER Admissions	34.2
High Blood Pressure	19.3
Cancer (excluding skin)	68.9
Asthma	7.7
Coronary Heart Disease	13.8
Chronic Obstructive Pulmonary Disease	7.1

Diamond Disk stee	445
Diagnosed Diabetes	14.5
Life Expectancy at Birth	12.9
Cognitively Disabled	46.5
Physically Disabled	37.2
Heart Attack ER Admissions	6.2
Mental Health Not Good	6.0
Chronic Kidney Disease	7.4
Obesity	3.9
Pedestrian Injuries	94.4
Physical Health Not Good	6.0
Stroke	13.0
Health Risk Behaviors	
Binge Drinking	72.5
Current Smoker	4.8
No Leisure Time for Physical Activity	4.7
Climate Change Exposures	
Wildfire Risk	32.2
SLR Inundation Area	0.0
Children	22.0
Elderly	91.2
English Speaking	24.7
Foreign-born	59.6
Outdoor Workers	4.2
Climate Change Adaptive Capacity	_
Impervious Surface Cover	93.6
Traffic Density	67.0
Traffic Access	23.0

Other Indices	
Hardship	96.9
Other Decision Support	_
2016 Voting	13.0

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	81.0
Healthy Places Index Score for Project Location (b)	5.00
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	Yes
Project Located in a Low-Income Community (Assembly Bill 1550)	Yes
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health and Equity Evaluation Scorecard not completed.

8. User Changes to Default Data

Screen	Justification
Construction: Construction Phases	Construction schedule based on info provided by Project team.
Construction: Off-Road Equipment	Construction equipment based on info from Project team.
Construction: Trips and VMT	Vendor trips adjusted based on CalEEMod defaults for building construction and number of days for site preparation, grading, and building construction.
Construction: Architectural Coatings	Per SCAQMD Rule 1113.

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

This page intentionally left blank



APPENDIX 4.2:

CALEEMOD OPERATIONS EMISSIONS MODEL OUTPUTS



14166 Harvill and Water Ops Detailed Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.4. Operations Emissions Compared Against Thresholds
 - 2.5. Operations Emissions by Sector, Unmitigated
- 4. Operations Emissions Details
 - 4.1. Mobile Emissions by Land Use
 - 4.1.1. Unmitigated
 - 4.2. Energy
 - 4.2.1. Electricity Emissions By Land Use Unmitigated
 - 4.2.3. Natural Gas Emissions By Land Use Unmitigated
 - 4.3. Area Emissions by Source

- 4.3.2. Unmitigated
- 4.4. Water Emissions by Land Use
 - 4.4.2. Unmitigated
- 4.5. Waste Emissions by Land Use
 - 4.5.2. Unmitigated
- 4.6. Refrigerant Emissions by Land Use
 - 4.6.1. Unmitigated
- 4.7. Offroad Emissions By Equipment Type
 - 4.7.1. Unmitigated
- 4.8. Stationary Emissions By Equipment Type
 - 4.8.1. Unmitigated
- 4.9. User Defined Emissions By Equipment Type
 - 4.9.1. Unmitigated
- 4.10. Soil Carbon Accumulation By Vegetation Type
 - 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
 - 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
 - 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated

- 5. Activity Data
 - 5.9. Operational Mobile Sources
 - 5.9.1. Unmitigated
 - 5.10. Operational Area Sources
 - 5.10.1. Hearths
 - 5.10.1.1. Unmitigated
 - 5.10.2. Architectural Coatings
 - 5.10.3. Landscape Equipment
 - 5.11. Operational Energy Consumption
 - 5.11.1. Unmitigated
 - 5.12. Operational Water and Wastewater Consumption
 - 5.12.1. Unmitigated
 - 5.13. Operational Waste Generation
 - 5.13.1. Unmitigated
 - 5.14. Operational Refrigeration and Air Conditioning Equipment
 - 5.14.1. Unmitigated
 - 5.15. Operational Off-Road Equipment

- 5.15.1. Unmitigated
- 5.16. Stationary Sources
 - 5.16.1. Emergency Generators and Fire Pumps
 - 5.16.2. Process Boilers
- 5.17. User Defined
- 5.18. Vegetation
 - 5.18.1. Land Use Change
 - 5.18.1.1. Unmitigated
 - 5.18.1. Biomass Cover Type
 - 5.18.1.1. Unmitigated
 - 5.18.2. Sequestration
 - 5.18.2.1. Unmitigated
- 6. Climate Risk Detailed Report
 - 6.1. Climate Risk Summary
 - 6.2. Initial Climate Risk Scores
 - 6.3. Adjusted Climate Risk Scores
 - 6.4. Climate Risk Reduction Measures

- 7. Health and Equity Details
 - 7.1. CalEnviroScreen 4.0 Scores
 - 7.2. Healthy Places Index Scores
 - 7.3. Overall Health & Equity Scores
 - 7.4. Health & Equity Measures
 - 7.5. Evaluation Scorecard
- 8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	14166 Harvill and Water Ops
Lead Agency	_
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.50
Precipitation (days)	9.00
Location	33.818594803089496, -117.24741560302533
County	Riverside-South Coast
City	Unincorporated
Air District	South Coast AQMD
Air Basin	South Coast
TAZ	5579
EDFZ	11
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)		Special Landscape Area (sq ft)	Population	Description
Unrefrigerated Warehouse-No Rail	304	1000sqft	6.99	304,376	135,180	0.00	_	_
Parking Lot	253	Space	2.28	0.00	0.00	0.00	_	_

Other Asphalt Surfaces	4.72	Acre	4.72	0.00	0.00	0.00	_	_
User Defined Industrial	435	User Defined Unit	0.00	0.00	0.00	0.00	_	_
Refrigerated Warehouse-No Rail	130	1000sqft	2.99	130,447	0.00	0.00	_	_

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.4. Operations Emissions Compared Against Thresholds

Un/Mit.	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	8.19	17.5	27.4	69.9	0.29	0.69	6.11	6.80	0.68	1.23	1.92	413	37,539	37,952	43.3	3.67	8,337	48,465
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	4.66	14.2	28.4	43.2	0.28	0.67	6.11	6.77	0.65	1.23	1.88	413	36,801	37,214	43.3	3.69	8,247	47,641
Average Daily (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	6.96	16.3	28.8	57.6	0.29	0.68	6.11	6.79	0.67	1.23	1.91	413	36,947	37,360	43.3	3.69	8,285	47,827
Annual (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	1.27	2.98	5.26	10.5	0.05	0.12	1.11	1.24	0.12	0.23	0.35	68.4	6,117	6,185	7.16	0.61	1,372	7,918

2.5. Operations Emissions by Sector, Unmitigated

Sector	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	4.41	3.70	23.5	47.8	0.27	0.38	6.11	6.49	0.36	1.23	1.60	_	28,242	28,242	0.63	3.14	92.3	29,286
Area	3.36	13.6	0.16	18.9	< 0.005	0.03	_	0.03	0.03	_	0.03	_	77.8	77.8	< 0.005	< 0.005	_	78.0
Energy	0.41	0.21	3.76	3.16	0.02	0.29	_	0.29	0.29	_	0.29	_	8,554	8,554	0.78	0.06	_	8,590
Water	_	_	_	-	_	_	_	_	_	_	_	193	665	857	19.8	0.48	_	1,495
Waste	_	_	_	-	_	_	_	_	_	_	_	220	0.00	220	22.0	0.00	_	771
Refrig.	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	8,245	8,245
Total	8.19	17.5	27.4	69.9	0.29	0.69	6.11	6.80	0.68	1.23	1.92	413	37,539	37,952	43.3	3.67	8,337	48,465
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	4.25	3.54	24.6	40.1	0.26	0.38	6.11	6.49	0.36	1.23	1.60	_	27,582	27,582	0.64	3.16	2.39	28,541
Area	_	10.5	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Energy	0.41	0.21	3.76	3.16	0.02	0.29	_	0.29	0.29	_	0.29	_	8,554	8,554	0.78	0.06	_	8,590
Water	_	_	_	_	_	_	_	_	_	_	_	193	665	857	19.8	0.48	_	1,495
Waste	_	_	_		_	_	_	_	_	_	_	220	0.00	220	22.0	0.00	_	771
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8,245	8,245
Total	4.66	14.2	28.4	43.2	0.28	0.67	6.11	6.77	0.65	1.23	1.88	413	36,801	37,214	43.3	3.69	8,247	47,641
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	4.24	3.52	24.9	41.4	0.26	0.38	6.11	6.49	0.36	1.23	1.60	_	27,675	27,675	0.64	3.16	39.9	28,673
Area	2.30	12.6	0.11	12.9	< 0.005	0.02	_	0.02	0.02	_	0.02	_	53.3	53.3	< 0.005	< 0.005	_	53.5
Energy	0.41	0.21	3.76	3.16	0.02	0.29	_	0.29	0.29	_	0.29	_	8,554	8,554	0.78	0.06	_	8,590
Water	_	_	_	_	_	_	_	_	_	_	_	193	665	857	19.8	0.48	_	1,495

Waste	_	_	_	_	_	_	_	_	_	_	_	220	0.00	220	22.0	0.00	_	771
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8,245	8,245
Total	6.96	16.3	28.8	57.6	0.29	0.68	6.11	6.79	0.67	1.23	1.91	413	36,947	37,360	43.3	3.69	8,285	47,827
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	0.77	0.64	4.55	7.56	0.05	0.07	1.11	1.18	0.07	0.23	0.29	_	4,582	4,582	0.11	0.52	6.60	4,747
Area	0.42	2.30	0.02	2.36	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	8.82	8.82	< 0.005	< 0.005	_	8.85
Energy	0.08	0.04	0.69	0.58	< 0.005	0.05	_	0.05	0.05	_	0.05	_	1,416	1,416	0.13	0.01	_	1,422
Water	_	_	_	_	_	_	_	_	_	_	_	31.9	110	142	3.28	0.08	_	248
Waste	_	_	_	_	_	_	_	_		_	_	36.5	0.00	36.5	3.65	0.00	_	128
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	1,365	1,365
Total	1.27	2.98	5.26	10.5	0.05	0.12	1.11	1.24	0.12	0.23	0.35	68.4	6,117	6,185	7.16	0.61	1,372	7,918

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

		(1.07 0.01	,	<i>y</i> ,, <i>y</i> .		ally arra		o, cray	J. J		,							
Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	2.63	2.37	1.57	31.2	0.06	0.03	0.29	0.32	0.03	0.09	0.11	_	6,472	6,472	0.22	0.15	25.5	6,549
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	0.90	0.52	21.4	6.12	0.18	0.34	1.47	1.81	0.33	0.47	0.80	_	19,589	19,589	0.33	2.93	58.2	20,529
Refrigera ted Warehou se-No Rail	0.89	0.80	0.53	10.5	0.02	0.01	0.10	0.11	0.01	0.03	0.04	_	2,182	2,182	0.08	0.05	8.61	2,208
Total	4.41	3.70	23.5	47.8	0.27	0.38	1.86	2.24	0.36	0.59	0.95	_	28,242	28,242	0.63	3.14	92.3	29,286
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	2.52	2.27	1.74	25.4	0.06	0.03	0.29	0.32	0.03	0.09	0.11	_	5,974	5,974	0.23	0.17	0.66	6,030
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	0.88	0.50	22.3	6.14	0.18	0.34	1.47	1.82	0.33	0.47	0.80	_	19,594	19,594	0.33	2.93	1.51	20,479
Refrigera ted Warehou se-No Rail	0.85	0.76	0.59	8.55	0.02	0.01	0.10	0.11	0.01	0.03	0.04	_	2,014	2,014	0.08	0.06	0.22	2,032
Total	4.25	3.54	24.6	40.1	0.26	0.38	1.86	2.24	0.36	0.59	0.95	_	27,582	27,582	0.64	3.16	2.39	28,541
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige rated	0.46	0.41	0.33	4.82	0.01	0.01	0.05	0.06	< 0.005	0.02	0.02	_	1,001	1,001	0.04	0.03	1.83	1,012
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	0.16	0.09	4.11	1.11	0.03	0.06	0.27	0.33	0.06	0.09	0.15	_	3,244	3,244	0.05	0.49	4.16	3,394
Refrigera ted Warehou se-No Rail	0.15	0.14	0.11	1.63	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	_	337	337	0.01	0.01	0.62	341
Total	0.77	0.64	4.55	7.56	0.05	0.07	0.34	0.41	0.07	0.11	0.17	_	4,582	4,582	0.11	0.52	6.60	4,747

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	1,338	1,338	0.13	0.02	_	1,346
Parking Lot	_	_	_	_	-	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00

Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	_	_	_	-	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Refrigera ted Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	2,725	2,725	0.26	0.03	_	2,741
Total	_	_	_	_	_	_	_	_	_	_	_	_	4,063	4,063	0.38	0.05	_	4,086
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	1,338	1,338	0.13	0.02	_	1,346
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	-	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Refrigera ted Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	2,725	2,725	0.26	0.03	_	2,741
Total	_	_	_	_		_	_		_	_	_	_	4,063	4,063	0.38	0.05	_	4,086
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige rated	_	_	_	_	_	_	_	_	_	_	_	_	222	222	0.02	< 0.005	_	223
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Refrigera ted Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	451	451	0.04	0.01		454
Total	_	_	_	_	_	_	_	_	_	_	_	_	673	673	0.06	0.01	_	677

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.26	0.13	2.40	2.01	0.01	0.18	_	0.18	0.18	_	0.18	_	2,861	2,861	0.25	0.01	_	2,869
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00

User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Refrigera ted Warehou se-No Rail	0.15	0.08	1.37	1.15	0.01	0.10	_	0.10	0.10	_	0.10	_	1,630	1,630	0.14	< 0.005	_	1,634
Total	0.41	0.21	3.76	3.16	0.02	0.29	_	0.29	0.29	_	0.29	_	4,491	4,491	0.40	0.01	_	4,504
Daily, Winter (Max)	_	_	_	_	_	_	_	-	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.26	0.13	2.40	2.01	0.01	0.18	_	0.18	0.18	_	0.18	_	2,861	2,861	0.25	0.01	_	2,869
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Refrigera ted Warehou se-No Rail	0.15	0.08	1.37	1.15	0.01	0.10	_	0.10	0.10	_	0.10	_	1,630	1,630	0.14	< 0.005	_	1,634
Total	0.41	0.21	3.76	3.16	0.02	0.29	_	0.29	0.29	_	0.29	_	4,491	4,491	0.40	0.01	_	4,504
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.05	0.02	0.44	0.37	< 0.005	0.03	_	0.03	0.03	_	0.03	_	474	474	0.04	< 0.005	_	475

Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Refrigera ted Warehou se-No Rail	0.03	0.01	0.25	0.21	< 0.005	0.02	_	0.02	0.02	_	0.02	_	270	270	0.02	< 0.005	_	271
Total	0.08	0.04	0.69	0.58	< 0.005	0.05	_	0.05	0.05	_	0.05	_	744	744	0.07	< 0.005	_	746

4.3. Area Emissions by Source

4.3.2. Unmitigated

Cauras	TOC	DOC.		СО		DM40E			DMO FF		DMO ET	DCCC	NDCCO	СООТ	CH4	NOO	Ь	0000
Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PIVIZ.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	9.33	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	1.15	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Landsca pe Equipme nt	3.36	3.10	0.16	18.9	< 0.005	0.03	_	0.03	0.03	_	0.03	_	77.8	77.8	< 0.005	< 0.005	_	78.0
Total	3.36	13.6	0.16	18.9	< 0.005	0.03	_	0.03	0.03	_	0.03	_	77.8	77.8	< 0.005	< 0.005	_	78.0

Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	9.33	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings		1.15	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	10.5	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	1.70	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	0.21	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Landsca pe Equipme nt	0.42	0.39	0.02	2.36	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	8.82	8.82	< 0.005	< 0.005	_	8.85
Total	0.42	2.30	0.02	2.36	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	8.82	8.82	< 0.005	< 0.005	_	8.85

4.4. Water Emissions by Land Use

4.4.2. Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily,	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_
Summer																		
(Max)																		

Unrefrige rated Warehou Rail	_	_	_	_	_	_	_	_	_	_	_	135	469	603	13.9	0.33	_	1,050
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Refrigera ted Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	57.8	196	254	5.95	0.14	_	445
Total	_	_	_	_	_	_	_	_	_	_	_	193	665	857	19.8	0.48	_	1,495
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	135	469	603	13.9	0.33	_	1,050
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00

Refrigera ted Warehou se-No			_	_	_	_	_	_	_	_	_	57.8	196	254	5.95	0.14	_	445
Total	_	_	_	_	_	_	_	_	_	_	_	193	665	857	19.8	0.48	_	1,495
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	22.3	77.6	99.9	2.30	0.06	_	174
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Refrigera ted Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	9.57	32.5	42.0	0.98	0.02	-	73.7
Total	_	_	_	_	_	_	_	_	_	_	_	31.9	110	142	3.28	0.08	_	248

4.5. Waste Emissions by Land Use

4.5.2. Unmitigated

	TOG	ROG				PM10E	,					BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige Warehous Rail		_	_	_	_	_	_	_	_	_	_	154	0.00	154	15.4	0.00	_	539
Parking Lot	_	_	_	_	_	_	_	_	_	_	-	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	-	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	-	0.00
User Defined Industrial	_	_	-	-	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	-	0.00
Refrigera ted Warehou se-No Rail	_	_	_	_	_	-	_	_	_	_	_	66.1	0.00	66.1	6.60	0.00	_	231
Total	_	_	_	_	_	_	_	_	_	_	_	220	0.00	220	22.0	0.00	_	771
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	-	_	_	_	_	_	154	0.00	154	15.4	0.00	_	539
Parking Lot	_	_	_	_	_	_	_	_	_	_	-	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	-	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	-	0.00
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00

Refrigera ted Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	66.1	0.00	66.1	6.60	0.00	_	231
Total	_	_	_	_	_	_	_	_	_	_	_	220	0.00	220	22.0	0.00	_	771
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	25.5	0.00	25.5	2.55	0.00	_	89.3
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Refrigera ted Warehou se-No Rail	_	_	_	_		_	_	_	_	_	_	10.9	0.00	10.9	1.09	0.00	_	38.3
Total	_	_	_	_	_	_	_	_	_	_	_	36.5	0.00	36.5	3.65	0.00	_	128

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

			,	, ,					,									
Land	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Use																		

Daily, Summer (Max)	_	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_	
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8,112	8,112
Refrigera ted Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	133	133
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8,245	8,245
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8,112	8,112
Refrigera ted Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	133	133
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8,245	8,245
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	1,343	1,343

Refrigera ted Warehou se-No Rail		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	22.0	22.0
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	1,365	1,365

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

		_ `		<i>,</i> ,														
Equipme nt Type	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_			_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Equipr	ne TOG	3	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
nt																			
Type																			

Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	<u> </u>	_	_	_	<u> </u>	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipme nt Type	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetatio n	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG		со	SO2	PM10E			PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_		_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

	riteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)																	
Species	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	-	_	_	_	_	_	_	-	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Sequest	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

5. Activity Data

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Unrefrigerated Warehouse-No Rail	534	534	534	194,909	8,600	8,600	8,600	3,139,009
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	216	216	216	78,847	6,794	6,794	6,794	2,479,748
Refrigerated Warehouse-No Rail	180	180	180	65,701	2,899	2,899	2,899	1,058,121

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	665,950	221,983	18,287

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	250

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Unrefrigerated Warehouse-No Rail	1,400,845	349	0.0330	0.0040	4,464,321
Parking Lot	0.00	349	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	349	0.0330	0.0040	0.00
User Defined Industrial	0.00	349	0.0330	0.0040	0.00
Refrigerated Warehouse-No Rail	2,852,817	349	0.0330	0.0040	2,542,850

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Unrefrigerated Warehouse-No Rail	70,386,950	2,143,375
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00

User Defined Industrial	0.00	0.00
Refrigerated Warehouse-No Rail	30,165,869	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Unrefrigerated Warehouse-No Rail	286	0.00
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00
User Defined Industrial	0.00	0.00
Refrigerated Warehouse-No Rail	123	0.00

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Unrefrigerated Warehouse-No Rail	Cold storage	R-404A	3,922	7.50	7.50	7.50	25.0
Refrigerated Warehouse-No Rail	Cold storage	User Defined	150	7.50	7.50	7.50	25.0

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type Fuel Type Number per Day	Hours per Day Hou	ours per Year Horsepower	Load Factor
---	-------------------	--------------------------	-------------

5.16.2. Process Boilers

Equipment Type Fuel Type Number Boiler Rating (MMBtu/hr) Daily Heat Input (MMBtu/day) Annual Heat Input (MMBtu/y	Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)
--	----------------	-----------	--------	--------------------------	------------------------------	------------------------------

5.17. User Defined

Equipment Type	Fuel Type
_	_

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Veretation Lend Hea Time	Vegetation Soil Type	Initial Agree	Final Association
Vegetation Land Use Type	vedetation Soil Type	Initial Acres	Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Bi	omass Cover Type	Initial Acres	Final Acres
DI	omass Cover Type	Illiliai Acies	Filial Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)
21.5			

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	29.1	annual days of extreme heat
Extreme Precipitation	1.95	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth
Wildfire	6.36	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	4	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A

Wildfire	1	0	0	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack	N/A	N/A	N/A	N/A
Air Quality	0	0	0	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	4	1	1	4
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack	N/A	N/A	N/A	N/A
Air Quality	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.			
Indicator	Result for Project Census Tract		
Exposure Indicators	_		
AQ-Ozone	95.3		
AQ-PM	55.1		
AQ-DPM	13.9		
Drinking Water	10.2		
Lead Risk Housing	54.6		
Pesticides	52.5		
Toxic Releases	43.8		
Traffic	90.2		
Effect Indicators	_		
CleanUp Sites	60.4		
Groundwater	14.3		
Haz Waste Facilities/Generators	70.9		
Impaired Water Bodies	0.00		
Solid Waste	0.00		
Sensitive Population	_		
Asthma	66.5		
Cardio-vascular	91.0		
Low Birth Weights	49.3		
Socioeconomic Factor Indicators	_		
Education	93.2		
Housing	80.1		
Linguistic	84.3		
Poverty	84.1		

Linompleyment	02.4	
Unemployment	93.1	

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	ommunity conditions compared to other census tracts in the state. Result for Project Census Tract					
Economic	_					
Above Poverty	8.712947517					
Employed	6.274862056					
Education	_					
Bachelor's or higher	1.860644168					
High school enrollment	100					
Preschool enrollment	13.02450917					
Transportation	_					
Auto Access	65.16104196					
Active commuting	54.20248941					
Social	_					
2-parent households	54.04850507					
Voting	3.259335301					
Neighborhood	_					
Alcohol availability	90.15783395					
Park access	8.558963172					
Retail density	9.829334018					
Supermarket access	10.3554472					
Tree canopy	2.104452714					
Housing	_					
Homeownership	46.43911202					
Housing habitability	15.55241884					

Low-inc homeowner severe housing cost burden	28.37161555
Low-inc renter severe housing cost burden	2.322597203
Uncrowded housing	11.35634544
Health Outcomes	_
Insured adults	4.79917875
Arthritis	24.0
Asthma ER Admissions	34.2
High Blood Pressure	19.3
Cancer (excluding skin)	68.9
Asthma	7.7
Coronary Heart Disease	13.8
Chronic Obstructive Pulmonary Disease	7.1
Diagnosed Diabetes	14.5
Life Expectancy at Birth	12.9
Cognitively Disabled	46.5
Physically Disabled	37.2
Heart Attack ER Admissions	6.2
Mental Health Not Good	6.0
Chronic Kidney Disease	7.4
Obesity	3.9
Pedestrian Injuries	94.4
Physical Health Not Good	6.0
Stroke	13.0
Health Risk Behaviors	_
Binge Drinking	72.5
Current Smoker	4.8
No Leisure Time for Physical Activity	4.7

Climate Change Exposures	_
Wildfire Risk	32.2
SLR Inundation Area	0.0
Children	22.0
Elderly	91.2
English Speaking	24.7
Foreign-born	59.6
Outdoor Workers	4.2
Climate Change Adaptive Capacity	_
Impervious Surface Cover	93.6
Traffic Density	67.0
Traffic Access	23.0
Other Indices	_
Hardship	96.9
Other Decision Support	_
2016 Voting	13.0

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	81.0
Healthy Places Index Score for Project Location (b)	5.00
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	Yes
Project Located in a Low-Income Community (Assembly Bill 1550)	Yes
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health and Equity Evaluation Scorecard not completed.

8. User Changes to Default Data

Screen	Justification					
Operations: Vehicle Data	Based on Project traffic study					
Operations: Fleet Mix	Fleet mix based on Project traffic study					
Operations: Refrigerants	As of 1 January 2022, new commercial refrigeration equipment may not use refrigerants with a GWF of 150 or greater.					

This page intentionally left blank



APPENDIX 4.3:

EMFAC2021



Source: EMFAC2021 (v1.0.2) Emissions Inventory

Region Type: Sub-Area Region: Riverside (SC) Calendar Year: 2023 Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/year for CVMT and EVMT, trips/year for Trips, kWh/year for Energy Consumption, tons/year for Emissions, 1000 gallons/year for Fuel Consumption

Region	CalYr	VehClass	MdlYr	Speed	Fuel	Population	VMT	Fuel_Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
Riverside (SC)	2023	HHDT	Aggregate	Aggregate	Gasoline	9.455104489	131459.0712	35.50354452	35503.54452	99150598.7	131459.0712	599123516.7	6.04	HHDT
Riverside (SC)	2023	HHDT	Aggregate	Aggregate	Diesel	14188.53655	583570327	96603.14331	96603143.31		583570327			
Riverside (SC)	2023	HHDT	Aggregate	Aggregate	Electricity	10.75839329	228949.2981	0	0		228949.2981			
Riverside (SC)	2023	HHDT	Aggregate	Aggregate	Natural Gas	693.7983116	15192781.36	2511.951841	2511951.841		15192781.36			
Riverside (SC)	2023	LDA	Aggregate	Aggregate	Gasoline	469124.6474	7067158685	242806.6852	242806685.2	246740301.6	7067158685	7550779257	30.60	LDA
Riverside (SC)	2023	LDA	Aggregate	Aggregate	Diesel	1558.762895	20320845.79	477.3973008	477397.3008		20320845.79			
Riverside (SC)	2023	LDA	Aggregate	Aggregate	Electricity	16185.78734	258364117.7	0	0		258364117.7			
Riverside (SC)	2023	LDA	Aggregate	Aggregate	Plug-in Hybrid	11651.42905	204935608.9	3456.219119	3456219.119		204935608.9			
Riverside (SC)	2023	LDT1	Aggregate	Aggregate	Gasoline	41569.09002	535313348.3	22207.82689	22207826.89	22223369.92	535313348.3	536734718.5	24.15	LDT1
Riverside (SC)	2023	LDT1	Aggregate	Aggregate	Diesel	20.22700504	133115.4936	5.428551707	5428.551707		133115.4936			
Riverside (SC)	2023	LDT1	Aggregate	Aggregate	Electricity	42.93918941	629191.2642	0	0		629191.2642			
Riverside (SC)	2023	LDT1	Aggregate	Aggregate	Plug-in Hybrid	33.25263876	659063.4443	10.11447806	10114.47806		659063.4443			
Riverside (SC)	2023	LDT2	Aggregate	Aggregate	Gasoline	191587.7811	2926985988	123727.7759	123727775.9	124415304.6	2926985988	2971260063	23.88	LDT2
Riverside (SC)	2023	LDT2	Aggregate	Aggregate	Diesel	577.8339592	9483128.387	294.7747611	294774.7611		9483128.387			
Riverside (SC)	2023	LDT2	Aggregate	Aggregate	Electricity	816.9774193	10243768.16	0	0		10243768.16			
Riverside (SC)	2023	LDT2	Aggregate	Aggregate	Plug-in Hybrid	1285.022226	24547178.6	392.753913	392753.913		24547178.6			
Riverside (SC)	2023	LHDT1	Aggregate	Aggregate	Gasoline	18052.34987	214710027.5	16264.43139	16264431.39	25315578.41	214710027.5	400294089.8	15.81	LHDT1
Riverside (SC)	2023	LHDT1	Aggregate	Aggregate	Diesel	15395.69696	185584062.3	9051.14702	9051147.02		185584062.3			
Riverside (SC)	2023	LHDT2	Aggregate	Aggregate	Gasoline	2523.570585	29590445.81	2489.092655	2489092.655	7416109.631	29590445.81	113374760.5	15.29	LHDT2
Riverside (SC)	2023	LHDT2	Aggregate	Aggregate	Diesel	6852.470307	83784314.72	4927.016975	4927016.975		83784314.72			
Riverside (SC)	2023	MCY	Aggregate	Aggregate	Gasoline	24170.7213	49108505.06	1180.944688	1180944.688	1180944.688	49108505.06	49108505.06	41.58	MCY
Riverside (SC)	2023	MDV	Aggregate	Aggregate	Gasoline	159138.1322	2240483695	117575.9492	117575949.2	119384446.1	2240483695	2303280197	19.29	MDV
Riverside (SC)	2023	MDV	Aggregate	Aggregate	Diesel	2483.005938	36136799.05	1546.826654	1546826.654		36136799.05			
Riverside (SC)	2023	MDV	Aggregate	Aggregate	Electricity	897.1539487	11221434.73	0	0		11221434.73			
Riverside (SC)	2023	MDV	Aggregate	Aggregate	Plug-in Hybrid	887.9224631	15438268.06	261.6701687	261670.1687		15438268.06			
Riverside (SC)	2023	MH	Aggregate	Aggregate	Gasoline	5083.841078	14589867.64	2987.294519	2987294.519	3555724.506	14589867.64	20481762.41	5.76	MH
Riverside (SC)	2023	MH	Aggregate	Aggregate	Diesel	2073.70666	5891894.766	568.4299865	568429.9865		5891894.766			
Riverside (SC)	2023	MHDT	Aggregate	Aggregate	Gasoline	1260.142241	16350653.43	3181.987303	3181987.303	22878390.46	16350653.43	192188901.4	8.40	MHDT
Riverside (SC)	2023	MHDT	Aggregate	Aggregate	Diesel	12683.243	173580543.8	19444.4315	19444431.5		173580543.8			
Riverside (SC)	2023	MHDT	Aggregate	Aggregate	Electricity	4.9202908	33851.09994	0	0		33851.09994			
Riverside (SC)	2023	MHDT	Aggregate	Aggregate	Natural Gas	147.6204682	2223853	251.9716552	251971.6552		2223853			
Riverside (SC)	2023	OBUS	Aggregate	Aggregate	Gasoline	386.6813181	4377338.625	865.1912845	865191.2845	1495782.789	4377338.625	9373868.799	6.27	OBUS
Riverside (SC)	2023	OBUS	Aggregate	Aggregate	Diesel	215.667787	4402321.003	569.9480953	569948.0953		4402321.003			
Riverside (SC)	2023	OBUS	Aggregate	Aggregate	Natural Gas	33.12387867	594209.1716	60.64340948	60643.40948		594209.1716			
Riverside (SC)	2023	SBUS	Aggregate	Aggregate	Gasoline	421.1646074	5416181.917	620.6011427	620601.1427	1928236.919	5416181.917	12328318.97	6.39	SBUS
Riverside (SC)	2023	SBUS	Aggregate	Aggregate	Diesel	499.0687276	3439904.877	470.0073536	470007.3536		3439904.877			
Riverside (SC)	2023	SBUS	Aggregate	Aggregate	Electricity	0.562315788	2136.364049	0	0		2136.364049			
Riverside (SC)	2023	SBUS	Aggregate	Aggregate	Natural Gas	428.0776414	3470095.813	837.6284223	837628.4223		3470095.813			
Riverside (SC)	2023	UBUS	Aggregate	Aggregate	Gasoline	145.9294435	6041770.968	1072.589711	1072589.711	3632187.011	6041770.968	16196846.91	4.46	UBUS
Riverside (SC)	2023	UBUS	Aggregate	Aggregate	Diesel	0.3117338	9845.875493	0.874590555	874.5905545		9845.875493			
Riverside (SC)	2023	UBUS	Aggregate	Aggregate	Electricity	0.030745281	971.0663719	0	0		971.0663719			
Riverside (SC)	2023	UBUS	Aggregate	Aggregate	Natural Gas	251.677147	10144259	2558.722709	2558722.709		10144259			

Source: EMFAC2021 (v1.0.2) Emissions Inventory

Region Type: Sub-Area Region: Riverside (SC) Calendar Year: 2024 Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/year for CVMT and EVMT, trips/year for Trips, kWh/year for Energy Consumption, tons/year for Emissions, 1000 gallons/year for Fuel Consumption

Region	CalYr	VehClass	MdlYr	Speed	Fuel	Population	VMT	Fuel_Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
Riverside (SC)	2024	HHDT	Aggregate	Aggregate	Gasoline	7.589475903	113786.0091	30.14312909	30143.12909	100279731.4	113786.0091	613803692.2	6.12	HHDT
Riverside (SC)	2024	HHDT	Aggregate	Aggregate	Diesel	14792.02338	596340506.9	97669.72048	97669720.48		596340506.9			
Riverside (SC)	2024	HHDT	Aggregate	Aggregate	Electricity	47.99547895	1606253.347	0	0		1606253.347			
Riverside (SC)	2024	HHDT	Aggregate	Aggregate	Natural Gas	740.0705237	15743145.86	2579.867799	2579867.799		15743145.86			
Riverside (SC)	2024	LDA	Aggregate	Aggregate	Gasoline	469145.3818	7085090946	238903.8299	238903829.9	243062955.2	7085090946	7657987641	31.51	LDA
Riverside (SC)	2024	LDA	Aggregate	Aggregate	Diesel	1473.049219	18851626.2	439.7144995	439714.4995		18851626.2			
Riverside (SC)	2024	LDA	Aggregate	Aggregate	Electricity	19934.69439	328159523.9	0	0		328159523.9			
Riverside (SC)	2024	LDA	Aggregate	Aggregate	Plug-in Hybrid	12893.65575	225885544.7	3719.410801	3719410.801		225885544.7			
Riverside (SC)	2024	LDT1	Aggregate	Aggregate	Gasoline	40643.24621	528502252.2	21530.04768	21530047.68	21550200.91	528502252.2	530619904	24.62	LDT1
Riverside (SC)	2024	LDT1	Aggregate	Aggregate	Diesel	18.16927182	117875.1936	4.799392489	4799.392489		117875.1936			
Riverside (SC)	2024	LDT1	Aggregate	Aggregate	Electricity	60.98632141	968118.5799	0	0		968118.5799			
Riverside (SC)	2024	LDT1	Aggregate	Aggregate	Plug-in Hybrid	52.35545177	1031657.988	15.35383286	15353.83286		1031657.988			
Riverside (SC)	2024	LDT2	Aggregate	Aggregate	Gasoline	196761.1569	3030302696	124807.115	124807115	125588800.8	3030302696	3086012831	24.57	LDT2
Riverside (SC)	2024	LDT2	Aggregate	Aggregate	Diesel	611.2140627	10065688.28	305.506804	305506.804		10065688.28			
Riverside (SC)	2024	LDT2	Aggregate	Aggregate	Electricity	1212.721837	15079067.55	0	0		15079067.55			
Riverside (SC)	2024	LDT2	Aggregate	Aggregate	Plug-in Hybrid	1617.209463	30565379.76	476.178994	476178.994		30565379.76			
Riverside (SC)	2024	LHDT1	Aggregate	Aggregate	Gasoline	17828.73734	214762485.9	15814.52949	15814529.49	24706225.38	214762485.9	399295586.2	16.16	LHDT1
Riverside (SC)	2024	LHDT1	Aggregate	Aggregate	Diesel	15247.60565	183240310	8891.695883	8891695.883		183240310			
Riverside (SC)	2024	LHDT1	Aggregate	Aggregate	Electricity	53.50587181	1292790.328	0	0		1292790.328			
Riverside (SC)	2024	LHDT2	Aggregate	Aggregate	Gasoline	2494.679179	29349825.66	2415.690169	2415690.169	7267382.396	29349825.66	112758661.6	15.52	LHDT2
Riverside (SC)	2024	LHDT2	Aggregate	Aggregate	Diesel	6844.928194	83091798.01	4851.692227	4851692.227		83091798.01			
Riverside (SC)	2024	LHDT2	Aggregate	Aggregate	Electricity	13.8489928	317037.9282	0	0		317037.9282			
Riverside (SC)	2024	MCY	Aggregate	Aggregate	Gasoline	24077.0623	48669553.86	1165.648599	1165648.599	1165648.599	48669553.86	48669553.86	41.75	MCY
Riverside (SC)	2024	MDV	Aggregate	Aggregate	Gasoline	158529.7591	2244541310	115229.5708	115229570.8	117035531.4	2244541310	2315716725	19.79	MDV
Riverside (SC)	2024	MDV	Aggregate	Aggregate	Diesel	2456.219583	35407756.28	1494.401662	1494401.662		35407756.28			
Riverside (SC)	2024	MDV	Aggregate	Aggregate	Electricity	1347.135818	16720447.79	0	0		16720447.79			
Riverside (SC)	2024	MDV	Aggregate	Aggregate	Plug-in Hybrid		19047211.64	311.5588534	311558.8534		19047211.64			
Riverside (SC)	2024	MH	Aggregate	Aggregate	Gasoline	4781.777946	13610896.25	2785.688937	2785688.937	3339642.723	13610896.25	19350599.97	5.79	MH
Riverside (SC)	2024	MH	Aggregate	Aggregate	Diesel	2046.063726	5739703.715	553.953786	553953.786		5739703.715			
Riverside (SC)	2024	MHDT	Aggregate	Aggregate	Gasoline	1238.0029	16338867.45	3135.493991	3135493.991	23076682.45	16338867.45	195538138.7	8.47	MHDT
Riverside (SC)	2024	MHDT	Aggregate	Aggregate	Diesel	12954.3675	176205580.2	19676.0133	19676013.3		176205580.2			
Riverside (SC)	2024	MHDT	Aggregate	Aggregate	Electricity	40.46425607	652027.6804	0	0		652027.6804			
Riverside (SC)	2024	MHDT	Aggregate	Aggregate	Natural Gas	158.0466253	2341663.336	265.1751591	265175.1591		2341663.336			
Riverside (SC)	2024	OBUS	Aggregate	Aggregate	Gasoline	374.6153087	4179652.523	816.3886522	816388.6522	1448796.089		9235296.571	6.37	OBUS
Riverside (SC)	2024	OBUS	Aggregate	Aggregate	Diesel	219.2789175	4421146.516	569.7450307	569745.0307		4421146.516			
Riverside (SC)	2024	OBUS	Aggregate	Aggregate	Electricity	0.821516166	18182.28444	0	0		18182.28444			
Riverside (SC)	2024	OBUS	Aggregate	Aggregate	Natural Gas	34.6553722	616315.2475	62.66240627	62662.40627		616315.2475			
Riverside (SC)	2024	SBUS	Aggregate	Aggregate	Gasoline	423.5817437	5478383.868	626.1467184	626146.7184	1935258.575		12396347.67	6.41	SBUS
Riverside (SC)	2024	SBUS	Aggregate	Aggregate	Diesel	491.8063992	3343899.326	456.140685	456140.685		3343899.326			
Riverside (SC)	2024	SBUS	Aggregate	Aggregate	Electricity	2.445505521	20273.75397	0	0		20273.75397			
Riverside (SC)	2024	SBUS	Aggregate	Aggregate	Natural Gas	443.1589434	3553790.724	852.9711721	852971.1721		3553790.724			
Riverside (SC)	2024	UBUS	Aggregate	Aggregate	Gasoline	146.2127201	6053134.018	1073.421016	1073421.016	3614773.705		16229605.17	4.49	UBUS
Riverside (SC)	2024	UBUS	Aggregate	Aggregate	Diesel	0.3117338	9845.875493	0.874762616	874.7626165		9845.875493			
Riverside (SC)	2024	UBUS	Aggregate	Aggregate	Electricity	0.120004951	6004.935081	0	0		6004.935081			
Riverside (SC)	2024	UBUS	Aggregate	Aggregate	Natural Gas	252.109466	10160620.35	2540.477927	2540477.927		10160620.35			

This page intentionally left blank

