

# Muranaka Warehouse

AIR QUALITY IMPACT ANALYSIS COUNTY OF RIVERSIDE

PREPARED BY:

Haseeb Qureshi hqureshi@urbanxroads.com

Alyssa Barnett abarnett@urbanxroads.com

DECEMBER 8, 2021

13660-04 AQ Report

# **TABLE OF CONTENTS**

TABLE OF CONTENTSI						
APPENDICESII						
LIST OF EXHIBITSII						
		ABLES				
		BBREVIATED TERMS				
EX	ECUTI	VE SUMMARY	1			
	ES.1	Summary of Findings	1			
	ES.2	Regulatory Requirements				
1		RODUCTION				
	1.1	Site Location	5			
	1.2	Project Description				
2						
2	AIR	QUALITY SETTING				
	2.1	South Coast Air Basin (SCAB)				
	2.2	Regional Climate				
	2.3	Wind Patterns and Project Location				
	2.4	Criteria Pollutants				
	2.5	Existing Air Quality				
	2.6	Regional Air Quality				
	2.7	Local Air Quality				
	2.8	Regulatory Background				
	2.9	Regional Air Quality Improvement	26			
3	PR	DJECT AIR QUALITY IMPACT	37			
	3.1	Introduction	37			
	3.2	Standards of Significance	37			
	3.3	Models Employed To Analyze Air Quality	38			
	3.4	Construction Emissions	38			
	3.5	Operational Emissions	41			
	3.6	Localized Significance	45			
	3.7	Construction-Source Emissions LST Analysis	50			
	3.8	Operational-Source Emissions LST Analysis	51			
	3.9	CO "Hot Spot" Analysis	53			
	3.10	AQMP	55			
	3.11	Toxic Air Contaminants				
	3.12	Potential Impacts to Sensitive Receptors	58			
	3.13	Odors				
	3.14	Cumulative Impacts	61			
4	4 REFERENCES					
5	CEF	RTIFICATIONS	68			



# **APPENDICES**

APPENDIX 2.1: STATE/FEDERAL ATTAINMENT STATUS OF CRITERIA POLLUTANTS APPENDIX 3.1: CALEEMOD PROJECT CONSTRUCTION EMISSIONS MODEL OUTPUTS APPENDIX 3.2: CALEEMOD PROJECT OPERATIONAL EMISSIONS MODEL OUTPUTS APPENDIX 3.3: PROJECT BLASTING EMISSIONS CALCULATION APPENDIX 3.4: SCAQMD AMICUS BRIEF

# **LIST OF EXHIBITS**

EXHIBIT 1-A: LOCATION MAP	6
EXHIBIT 1-B: SITE PLAN	7
EXHIBIT 2-A: DPM AND DIESEL VEHICLE MILES TREND	34
EXHIBIT 3-A: RECEPTOR LOCATIONS	49

## **LIST OF TABLES**

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS
TABLE 2-1: CRITERIA POLLUTANTS
TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (1 OF 2)19
TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (2 OF 2)20
TABLE 2-3: ATTAINMENT STATUS OF CRITERIA POLLUTANTS IN THE SCAB
TABLE 2-4: PROJECT AREA AIR QUALITY MONITORING SUMMARY 2018-2020
TABLE 2-5: SCAB O <sub>3</sub> TREND
TABLE 2-6: SCAB AVERAGE 24-HOUR CONCENTRATION PM <sub>10</sub> TREND (BASED ON FEDERAL STANDARD) <sup>1</sup>
TABLE 2-8: SCAB 24-HOUR AVERAGE CONCENTRATION PM <sub>2.5</sub> TREND (BASED ON FEDERAL STANDARD) <sup>1</sup>
TABLE 2-10: SCAB 8-HOUR AVERAGE CONCENTRATION CO TREND <sup>1</sup> 31
TABLE 2-11: SCAB 1-HOUR AVERAGE CONCENTRATION NO2 TREND (BASED ON FEDERAL STANDARD)32
TABLE 2-12: SCAB 1-HOUR AVERAGE CONCENTRATION NO2 TREND (BASED ON STATE STANDARD)32
TABLE 3-1: MAXIMUM DAILY REGIONAL EMISSIONS THRESHOLDS
TABLE 3-2: CONSTRUCTION TRIP ASSUMPTIONS       39
TABLE 3-3: CONSTRUCTION DURATION
TABLE 3-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS
TABLE 3-5: OVERALL CONSTRUCTION EMISSIONS SUMMARY – WITHOUT MITIGATION41
TABLE 3-6: PASSENGER CAR FLEET MIX
TABLE 3-7: TRUCK FLEET MIX
TABLE 3-8: SUMMARY OF PEAK OPERATIONAL EMISSIONS (1 OF 2)44
TABLE 3-8: SUMMARY OF PEAK OPERATIONAL EMISSIONS (2 OF 2)45
TABLE 3-9: MAXIMUM DAILY LOCALIZED CONSTRUCTION EMISSIONS THRESHOLDS
TABLE 3-10: LOCALIZED CONSTRUCTION-SOURCE EMISSIONS – WITHOUT MITIGATION
TABLE 3-11: MAXIMUM DAILY LOCAL IZED OPERATIONAL EMISSIONS THRESHOLDS
TABLE 3-12: LOCALIZED SIGNIFICANCE SUMMARY OF OPERATIONS – WITHOUT MITIGATION



TABLE 3-13: CO MODEL RESULTS	53
TABLE 3-14: TRAFFIC VOLUMES	54
TABLE 3-15: OPENING YEAR TRAFFIC VOLUMES	55



# LIST OF ABBREVIATED TERMS

%	Percent
°F	Degrees Fahrenheit
(1)	Reference
μg/m <sup>3</sup>	Microgram per Cubic Meter
1992 CO Plan	1992 Federal Attainment Plan for Carbon Monoxide
1993 CEQA Handbook	SCAQMD's CEQA Air Quality Handbook (1993)
2016-2040 RTP/SCS	2016-2040 Regional Transportation Plan/Sustainable
	Communities Strategy
AB 2595	California Clean Air Act
AQIA	Air Quality Impact Analysis
AQMP	Air Quality Management Plan
BACT	Best Available Control Technology
BC	Black Carbon
Brief	Brief of Amicus Curiae by the SCAQMD in the Friant Ranch
	Case
C <sub>2</sub> Cl <sub>4</sub>	Perchloroethylene
$C_4H_6$	1,3-butadiene
$C_6H_6$	Benzene
$C_2H_3CI$	Vinyl Chloride
$C_2H_4O$	Acetaldehyde
CAA	Federal Clean Air Act
CAAQS	California Ambient Air Quality Standards
CalEEMod	California Emissions Estimator Model
CalEPA	California Environmental Protection Agency
CALGreen	California Green Building Standards Code
САР	Climate Action Plan
CAPCOA	California Air Pollution Control Officers Association
CARB	California Air Resources Board
CCR	California Code of Regulations
CEC	California Energy Commission
CEQA	California Environmental Quality Act
CEQA Guidelines	2019 CEQA Statute and Guidelines
CH <sub>2</sub> O	Formaldehyde
СО	Carbon Monoxide
СОН	Coefficient of Haze
COHb	Carboxyhemoglobin



County	County of Riverside
Cr(VI)	Chromium
СТР	Clean Truck Program
DPM	Diesel Particulate Matter
DRRP	Diesel Risk Reduction Plan
EC	Elemental Carbon
EIR	Environmental Impact Report
EMFAC	EMissions FACtor Model
EPA	Environmental Protection Agency
ETW	Equivalent Test Weight
EV	Electric Vehicle
GHG	Greenhouse Gas
GVWR	Gross Vehicle Weight Rating
$H_2S$	Hydrogen Sulfide
HDT	Heavy-Duty Trucks
HHDT	Heavy-Heavy-Duty Trucks
н	Hazard Index
hp	Horsepower
lbs	Pounds
lbs/day	Pounds Per Day
LDA	Light Duty Auto
LDT1/LDT2	Light-Duty Trucks
LHDT1/LHDT2	Light-Heavy-Duty Trucks
LST	Localized Significance Threshold
LST Methodology	Final Localized Significance Threshold Methodology
MATES	Multiple Air Toxics Exposure Study
MCY	Motorcycles
MDV	Medium-Duty Vehicles
MHDT	Medium-Heavy-Duty Trucks
MICR	Maximum Individual Cancer Risk
MM	Mitigation Measures
mph	Miles Per Hour
MWELO	California Department of Water Resources' Model Water
	Efficient
N <sub>2</sub>	Nitrogen
N <sub>2</sub> O	Nitrous Oxide
NAAQS	National Ambient Air Quality Standards
NO	Nitric Oxide



NO <sub>2</sub>	Nitrogen Dioxide
NO <sub>X</sub>	Nitrogen Oxides
O <sub>2</sub>	Oxygen
O <sub>3</sub>	Ozone
O <sub>2</sub> Deficiency	Chronic Hypoxemia
OBD-II	On-Board Diagnostic
ODC	Ozone Depleting Compounds
Pb	Lead
PM	Particulate Matter
PM <sub>10</sub>	Particulate Matter 10 microns in diameter or less
PM <sub>2.5</sub>	Particulate Matter 2.5 microns in diameter or less
POLA	Port of Los Angeles
POLB	Port of Long Beach
ppm	Parts Per Million
Project	Muranaka Warehouse
RECLAIM	Regional Clean Air Incentives Market
RFG-2	Reformulated Gasoline Regulation
ROG	Reactive Organic Gases
SB	Senate Bill
SCAB	South Coast Air Basin
SCAG	Southern California Association of Governments
SCAQMD	South Coast Air Quality Management District
sf	Square Feet
SIPs	State Implementation Plans
SO <sub>2</sub>	Sulfur Dioxide
SO <sub>4</sub>	Sulfates
SO <sub>x</sub>	Sulfur Oxides
SRA	Source Receptor Area
ТАС	Toxic Air Contaminant
Title 24	California Building Code
TITLE I	Non-Attainment Provisions
TITLE II	Mobile Sources Provisions
UFP	Ultrafine Particles
URBEMIS	URBan EMISsions
VMT	Vehicle Miles Traveled
VOC	Volatile Organic Compounds
vph	Vehicles Per Hour



This page intentionally left blank



# **EXECUTIVE SUMMARY**

### ES.1 SUMMARY OF FINDINGS

The results of this *Muranaka Warehouse Air Quality Impact Analysis* (AQIA) are summarized below based on the significance criteria in Section 3 of this report consistent with Appendix G of the *California Environmental Quality Act (CEQA) Guidelines* (*CEQA Guidelines*) (1). Table ES-1 shows the findings of significance for each potential air quality impact under CEQA before and after any required mitigation measures (MM) described below.

Analysis	Report	Significance Findings	
Analysis	Section	Unmitigated	Mitigated
Regional Construction Emissions	3.4	Less Than Significant	n/a
Localized Construction Emissions	3.7	Less Than Significant	n/a
Regional Operational Emissions	3.5	Less Than Significant	n/a
Localized Operational Emissions	3.7	Less Than Significant	n/a
CO "Hot Spot" Analysis	3.9	Less Than Significant	n/a
Air Quality Management Plan	3.10	Less Than Significant	n/a
Sensitive Receptors	3.11	Less Than Significant	n/a
Odors	3.12	Less Than Significant	n/a
Cumulative Impacts	3.13	Less Than Significant	n/a

### TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS

### ES.2 REGULATORY REQUIREMENTS

There are numerous requirements that development projects must comply with by law, and that were put in place by federal, State, and local regulatory agencies for the improvement of air quality.

Any operation or activity that might cause the emission of any smoke, fly ash, dust, fumes, vapors, gases, or other forms of air pollution, which can cause damage to human health, vegetation, or



other forms of property, or can cause excessive soiling on any other parcel shall conform to the requirements of the South Coast Air Quality Management District (SCAQMD).

#### SCAQMD RULES

SCAQMD Rules that are currently applicable during construction activity for this Project are described below.

### SCAQMD RULE 403

This rule is intended to reduce the amount of particulate matter (PM) entrained in the ambient air as a result of anthropogenic (human-made) fugitive dust sources by requiring actions to prevent and reduce fugitive dust emissions. Rule 403 applies to any activity or human-made condition capable of generating fugitive dust and requires best available control measures to be applied to earth moving and grading activities.

**Dust Control, Operations.** Any operation or activity that might cause the emission of any smoke, fly ash, dust, fumes, vapors, gases, or other forms of air pollution, which can cause damage to human health, vegetation, or other forms of property, or can cause excessive soiling on any other parcel, shall conform to the requirements of the SCAQMD.

### SCAQMD RULE 1113

This rule serves to limit the Volatile Organic Compound (VOC) content of architectural coatings used on projects in the SCAQMD. Any person who supplies, sells, offers for sale, or manufactures any architectural coating for use on projects.

### SCAQMD RULE 402

A person shall not discharge from any source whatsoever such quantities of air contaminants or other material that cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or that endanger the comfort, repose, health, or safety of any such persons or the public, or that cause, or have a natural tendency to cause, injury or damage to business or property. The provisions of this rule do not apply to odors emanating from agricultural operations necessary for the growing of crops or the raising of fowl or animals.

*Odor Emissions.* All uses shall be operated in a manner such that no offensive odor is perceptible at or beyond the property line of that use.

### SCAQMD RULE 1301

This rule is intended to provide that pre-construction review requirements to ensure that new or relocated facilities do not interfere with progress in attainment of the National Ambient Air Quality Standards (NAAQS), while future economic growth within the SCAQMD is not unnecessarily restricted. The specific air quality goal is to achieve no net increases from new or modified permitted sources of nonattainment air contaminants or their precursors. Rule 1301 also limits emission increases of ammonia, and Ozone Depleting Compounds (ODCs) from new, modified or relocated facilities by requiring the use of Best Available Control Technology (BACT).



#### SCAQMD RULE 1401

A person shall not discharge into the atmosphere from any single source of emission whatsoever any air contaminant for a period or periods aggregating more than three minutes in any 1 hour that is as dark or darker in shade as that designated No. 1 on the Ringelmann Chart, as published by the United States (U.S.) Bureau of Mines.

Although the Project would comply with the above regulatory requirements, it should be noted that there is no way to quantify these reductions in the California Emissions Estimator Model (CalEEMod). The two most pertinent regulatory requirements that could be modeled, are Rule 403 (Fugitive Dust) (2) and Rule 1113 (Architectural Coatings) (3). Because they are required by law, credit for Rule 403 and Rule 1113 have been taken in the analysis.



This page intentionally left blank

# 1 INTRODUCTION

This report presents the results of the AQIA prepared by Urban Crossroads, Inc., for the proposed Muranaka Warehouse (Project). The purpose of this AQIA is to evaluate the potential impacts to air quality associated with construction and operation of the Project and recommend measures to mitigate impacts considered potentially significant in comparison to thresholds established by the SCAQMD.

## 1.1 SITE LOCATION

The proposed Project is located on a 15.2-acre currently vacant site on the east side of Decker Street and south of Harley Knox Boulevard in the Mead Valley area of unincorporated County of Riverside, shown on Exhibit 1-A. The Project site is bounded to the north by Harley Knox Boulevard followed by industrial warehousing uses; to the west by the unimproved Decker Road and land that is approved for industrial business park uses; to the south by the undeveloped right-of-way for Rowland Lane followed by vacant land that is approved for industrial warehousing uses; and to the east by developed industrial warehousing uses.

## **1.2 PROJECT DESCRIPTION**

The Project is proposed to construct a new 239,308 square-foot (sf) high-cube fulfilment center building. It is anticipated that the Project would be developed in a single phase with an anticipated Opening Year of 2023.

At the time this study was prepared the future tenants of the proposed Project were unknown. It is expected that the Project business operations would primarily be conducted within the enclosed buildings, except for traffic movement, parking, as well as loading and unloading of trucks at designated loading bays. This analysis includes a conservative assumption of on-site Project-related emission sources for potential future tenants, including architectural coatings, consumer products, landscape maintenance equipment, natural gas, electricity, mobile operations, and on-site cargo handling equipment. This analysis is intended to describe air quality impacts associated with the expected typical operational activities at the Project site. To present a conservative approach, this report assumes the Project would operate 24-hours daily for seven days per week.




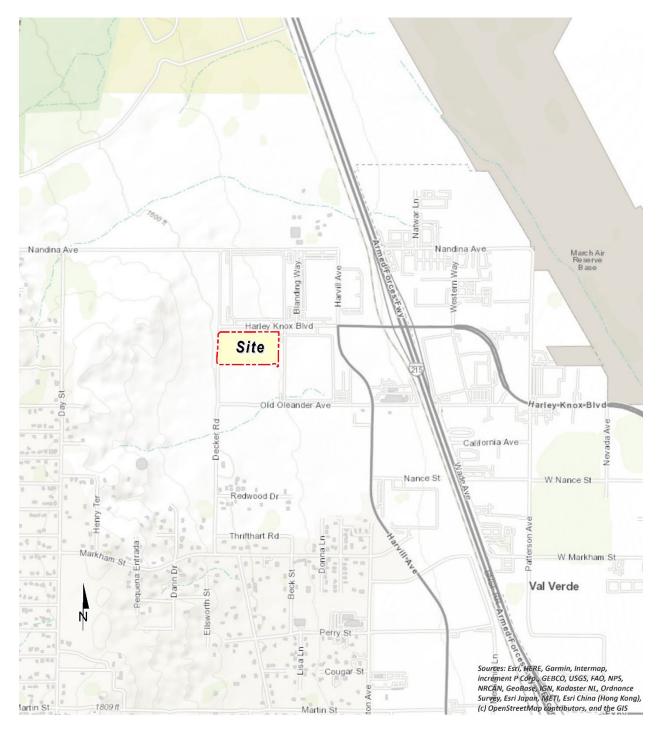


EXHIBIT 1-A: LOCATION MAP



EXHIBIT 1-B: SITE PLAN



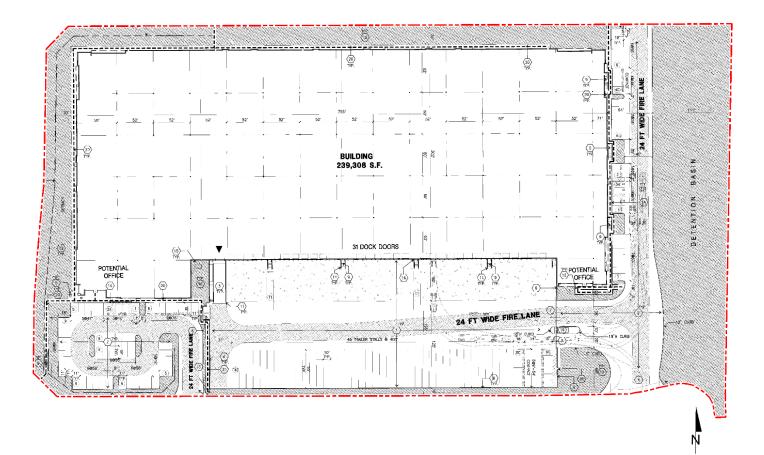

This page intentionally left blank



# 2 AIR QUALITY SETTING

This section provides an overview of the existing air quality conditions in the Project area and region.

# 2.1 SOUTH COAST AIR BASIN (SCAB)

The Project site is located in the SCAB within the jurisdiction of SCAQMD (4). The SCAQMD was created by the 1977 Lewis-Presley Air Quality Management Act, which merged four county air pollution control bodies into one regional district. Under the Act, the SCAQMD is responsible for bringing air quality in areas under its jurisdiction into conformity with federal and state air quality standards. As previously stated, the Project site is located within the SCAB, a 6,745-square mile subregion of the SCAQMD, which includes portions of Los Angeles, Riverside, and San Bernardino Counties, and all of Orange County.

The SCAB is bounded by the Pacific Ocean to the west and the San Gabriel, San Bernardino, and San Jacinto Mountains to the north and east. The Los Angeles County portion of the Mojave Desert Air Basin is bounded by the San Gabriel Mountains to the south and west, the Los Angeles / Kern County border to the north, and the Los Angeles / San Bernardino County border to the east. The Riverside County portion of the Salton Sea Air Basin is bounded by the San Jacinto Mountains in the west and spans eastward up to the Palo Verde Valley.

## 2.2 REGIONAL CLIMATE

The regional climate has a substantial influence on air quality in the SCAB. In addition, the temperature, wind, humidity, precipitation, and amount of sunshine influence the air quality.

The annual average temperatures throughout the SCAB vary from the low to middle 60s degrees Fahrenheit (°F). Due to a decreased marine influence, the eastern portion of the SCAB shows greater variability in average annual minimum and maximum temperatures. January is the coldest month throughout the SCAB, with average minimum temperatures of 47°F in downtown Los Angeles and 36°F in San Bernardino. All portions of the SCAB have recorded maximum temperatures above 100°F.

Although the climate of the SCAB can be characterized as semi-arid, the air near the land surface is quite moist on most days because of the presence of a marine layer. This shallow layer of sea air is an important modifier of SCAB climate. Humidity restricts visibility in the SCAB, and the conversion of sulfur dioxide (SO<sub>2</sub>) to sulfates (SO<sub>4</sub>) is heightened in air with high relative humidity. The marine layer provides an environment for that conversion process, especially during the spring and summer months. The annual average relative humidity within the SCAB is 71% along the coast and 59% inland. Since the ocean effect is dominant, periods of heavy early morning fog are frequent and low stratus clouds are a characteristic feature. These effects decrease with distance from the coast.

More than 90% of the SCAB's rainfall occurs from November through April. The annual average rainfall varies from approximately nine inches in Riverside to fourteen inches in downtown Los



Angeles. Monthly and yearly rainfall totals are extremely variable. Summer rainfall usually consists of widely scattered thunderstorms near the coast and slightly heavier shower activity in the eastern portion of the SCAB with frequency being higher near the coast.

Due to its generally clear weather, about three-quarters of available sunshine is received in the SCAB. The remaining one-quarter is absorbed by clouds. The ultraviolet portion of this abundant radiation is a key factor in photochemical reactions. On the shortest day of the year there are approximately 10 hours of possible sunshine, and on the longest day of the year there are approximately 14½ hours of possible sunshine.

The importance of wind to air pollution is considerable. The direction and speed of the wind determines the horizontal dispersion and transport of the air pollutants. During the late autumn to early spring rainy season, the SCAB is subjected to wind flows associated with the traveling storms moving through the region from the northwest. This period also brings five to ten periods of strong, dry offshore winds, locally termed "Santa Anas" each year. During the dry season, which coincides with the months of maximum photochemical smog concentrations, the wind flow is bimodal, typified by a daytime onshore sea breeze and a nighttime offshore drainage wind. Summer wind flows are created by the pressure differences between the relatively cold ocean and the unevenly heated and cooled land surfaces that modify the general northwesterly wind circulation over southern California. Nighttime drainage begins with the radiational cooling of the mountain slopes. Heavy, cool air descends the slopes and flows through the mountain passes and canyons as it follows the lowering terrain toward the ocean. Another characteristic wind regime in the SCAB is the "Catalina Eddy," a low level cyclonic (counterclockwise) flow centered over Santa Catalina Island which results in an offshore flow to the southwest. On most spring and summer days, some indication of an eddy is apparent in coastal sections.

In the SCAB, there are two distinct temperature inversion structures that control vertical mixing of air pollution. During the summer, warm high-pressure descending (subsiding) air is undercut by a shallow layer of cool marine air. The boundary between these two layers of air is a persistent marine subsidence/inversion. This boundary prevents vertical mixing which effectively acts as an impervious lid to pollutants over the entire SCAB. The mixing height for the inversion structure is normally situated 1,000 to 1,500 feet above mean sea level.

A second inversion-type forms in conjunction with the drainage of cool air off the surrounding mountains at night followed by the seaward drift of this pool of cool air. The top of this layer forms a sharp boundary with the warmer air aloft and creates nocturnal radiation inversions. These inversions occur primarily in the winter when nights are longer and onshore flow is weakest. They are typically only a few hundred feet above mean sea level. These inversions effectively trap pollutants, such as NO<sub>X</sub> and CO from vehicles, as the pool of cool air drifts seaward. Winter is therefore a period of high levels of primary pollutants along the coastline.

### 2.3 WIND PATTERNS AND PROJECT LOCATION

The distinctive climate of the Project area and the SCAB is determined by its terrain and geographical location. The SCAB is located in a coastal plain with connecting broad valleys and



low hills, bounded by the Pacific Ocean in the southwest quadrant with high mountains forming the remainder of the perimeter.

Wind patterns across the south coastal region are characterized by westerly and southwesterly onshore winds during the day and easterly or northeasterly breezes at night. Winds are characteristically light although the speed is somewhat greater during the dry summer months than during the rainy winter season.

### 2.4 CRITERIA POLLUTANTS

Criteria pollutants are pollutants that are regulated through the development of human health based and/or environmentally based criteria for setting permissible levels. Criteria pollutants, their typical sources, and health effects are identified below (5):

Criteria Pollutant	Description	Sources	Health Effects
СО	CO is a colorless, odorless gas produced by the incomplete combustion of carbon-containing fuels, such as gasoline or wood. CO concentrations tend to be the highest during the winter morning, when little to no wind and surface-based inversions trap the pollutant at ground levels. Because CO is emitted directly from internal combustion engines, unlike ozone (O <sub>3</sub> ), motor vehicles operating at slow speeds are the primary source of CO in the SCAB. The highest ambient CO concentrations are generally found near congested transportation corridors and intersections.	Any source that burns fuel such as automobiles, trucks, heavy construction equipment, farming equipment and residential heating.	Individuals with a deficient blood supply to the heart are the most susceptible to the adverse effects of CO exposure. The effects observed include earlier onset of chest pain with exercise, and electrocardiograph changes indicative of decreased oxygen (O <sub>2</sub> ) supply to the heart. Inhaled CO has no direct toxic effect on the lungs but exerts its effect on tissues by interfering with O <sub>2</sub> transport and competing with O <sub>2</sub> to combine with hemoglobin present in the blood to form carboxyhemoglobin (COHb). Hence, conditions with an increased demand for O <sub>2</sub> supply can be adversely affected by exposure to CO. Individuals most at risk include fetuses, patients with diseases involving heart and blood vessels, and patients with chronic hypoxemia (O <sub>2</sub> deficiency) as seen at high altitudes.

#### TABLE 2-1: CRITERIA POLLUTANTS



Criteria Pollutant	Description	Sources	Health Effects
SO2	SO <sub>2</sub> is a colorless, extremely irritating gas or liquid. It enters the atmosphere as a pollutant mainly as a result of burning high sulfur-content fuel oils and coal and from chemical processes occurring at chemical plants and refineries. When SO <sub>2</sub> oxidizes in the atmosphere, it forms SO <sub>4</sub> . Collectively, these pollutants are referred to as sulfur oxides (SO <sub>x</sub> ).	Coal or oil burning power plants and industries, refineries, diesel engines	A few minutes of exposure to low levels of SO <sub>2</sub> can result in airway constriction in some asthmatics, all of whom are sensitive to its effects. In asthmatics, increase in resistance to air flow, as well as reduction in breathing capacity leading to severe breathing difficulties, are observed after acute exposure to SO <sub>2</sub> . In contrast, healthy individuals do not exhibit similar acute responses even after exposure to higher concentrations of SO <sub>2</sub> . Animal studies suggest that despite SO <sub>2</sub> being a respiratory irritant, it does not cause substantial lung injury at ambient concentrations. However, very high levels of exposure can cause lung edema (fluid accumulation), lung tissue damage, and sloughing off of cells lining the respiratory tract. Some population-based studies indicate that the mortality and morbidity effects associated with fine particles show a similar association with ambient SO <sub>2</sub> levels. In these studies, efforts to separate the effects of SO <sub>2</sub> from those of fine particles have not been successful. It is not clear whether the two pollutants act synergistically, or one pollutant alone is the predominant factor.

Criteria Pollutant	Description	Sources	Health Effects
NOx	NO <sub>x</sub> consist of nitric oxide (NO), nitrogen dioxide (NO <sub>2</sub> ) and are formed when nitrogen (N <sub>2</sub> ) combines with O <sub>2</sub> . Their lifespan in the atmosphere ranges from one to seven days for nitric oxide and nitrogen dioxide, to 170 years for nitrous oxide. NO <sub>x</sub> is typically created during combustion processes and are major contributors to smog formation and acid deposition. NO <sub>2</sub> is a criteria air pollutant and may result in numerous adverse health effects; it absorbs blue light, resulting in a brownish-red cast to the atmosphere and reduced visibility. Of the seven types of NO <sub>x</sub> compounds, NO <sub>2</sub> is the most abundant in the atmosphere. As ambient concentrations of NO <sub>2</sub> are related to traffic density, commuters in heavy traffic may be exposed to higher concentrations of NO <sub>2</sub> than those indicated by regional monitoring station.	Any source that burns fuel such as automobiles, trucks, heavy construction equipment, farming equipment and residential heating.	Population-based studies suggest that an increase in acute respiratory illness, including infections and respiratory symptoms in children (not infants), is associated with long-term exposure to NO <sub>2</sub> at levels found in homes with gas stoves, which are higher than ambient levels found in Southern California. Increase in resistance to air flow and airway contraction is observed after short-term exposure to NO <sub>2</sub> in healthy subjects. Larger decreases in lung functions are observed in individuals with asthma or chronic obstructive pulmonary disease (e.g., chronic bronchitis, emphysema) than in healthy individuals, indicating a greater susceptibility of these sub-groups. In animals, exposure to levels of NO <sub>2</sub> considerably higher than ambient concentrations result in increased susceptibility to infections, possibly due to the observed changes in cells involved in maintaining immune functions. The severity of lung tissue damage associated with high levels of O <sub>3</sub> exposure increases when animals are exposed to a combination of O <sub>3</sub> and NO <sub>2</sub> .
O <sub>3</sub>	O <sub>3</sub> is a highly reactive and unstable gas that is formed when VOCs and NO <sub>x</sub> , both byproducts of internal combustion engine exhaust, undergo slow photochemical reactions in the presence of sunlight. O <sub>3</sub> concentrations are generally highest during the summer	Formed when reactive organic gases (ROG) and NOx react in the presence of sunlight. ROG sources include any source	Individuals exercising outdoors, children, and people with preexisting lung disease, such as asthma and chronic pulmonary lung disease, are considered to be the most susceptible sub- groups for O <sub>3</sub> effects. Short- term exposure (lasting for a



Criteria Pollutant	Description	Sources	Health Effects
	months when direct sunlight,	that burns fuels,	few hours) to O₃ at levels
	light wind, and warm	(e.g., gasoline,	typically observed in
	temperature conditions are	natural gas, wood,	Southern California can result
	favorable to the formation of this	oil) solvents,	in breathing pattern changes,
	pollutant.	petroleum	reduction of breathing
		processing and	capacity, increased
		storage and pesticides.	susceptibility to infections, inflammation of the lung tissue, and some
			immunological changes. Elevated O <sub>3</sub> levels are associated with increased
			school absences. In recent years, a correlation between
			elevated ambient O <sub>3</sub> levels and increases in daily hospital
			admission rates, as well as mortality, has also been reported. An increased risk
			for asthma has been found in children who participate in
			multiple outdoor sports and
			reside in communities with
			high O₃ levels.
			O <sub>3</sub> exposure under exercising conditions is known to
			increase the severity of the responses described above. Animal studies suggest that
			exposure to a combination of pollutants that includes O <sub>3</sub> may be more toxic than
			exposure to O₃ alone. Although lung volume and
			resistance changes observed after a single exposure
			diminish with repeated exposures, biochemical and
			cellular changes appear to
			persist, which can lead to
			subsequent lung structural changes.
Particulate Matter	PM <sub>10</sub> : A major air pollutant consisting of tiny solid or liquid	Sources of PM <sub>10</sub> include road dust,	A consistent correlation between elevated ambient
	particles of soot, dust, smoke, fumes, and aerosols. Particulate	windblown dust and construction. Also	fine particulate matter ( $PM_{10}$ and $PM_{2.5}$ ) levels and an
	matter pollution is a major cause	formed from other	increase in mortality rates,
	of reduce visibility (haze) which is	pollutants (acid	respiratory infections,
	caused by the scattering of light	rain, NO <sub>x</sub> , SO <sub>x</sub> ,	number and severity of



Criteria Pollutant	Description	Sources	Health Effects
Criteria Pollutant	<b>Description</b> and consequently the significant reduction air clarity. The size of the particles (10 microns or smaller, about 0.0004 inches or less) allows them to easily enter the lungs where they may be deposited, resulting in adverse health effects. Additionally, it should be noted that PM <sub>10</sub> is considered a criteria air pollutant. PM <sub>2.5</sub> : A similar air pollutant to PM <sub>10</sub> consisting of tiny solid or liquid particles which are 2.5 microns or smaller (which is often referred to as fine particles). These particles are formed in the atmosphere from primary gaseous emissions that include SO <sub>4</sub> formed from SO <sub>2</sub> release from power plants and industrial facilities and nitrates that are formed from NO <sub>X</sub> release from power plants, automobiles, and other types of combustion sources. The chemical composition of fine particles highly depends on location, time of year, and weather conditions. PM <sub>2.5</sub> is a criteria air pollutant.	Sources organics). Incomplete combustion of any fuel. PM <sub>2.5</sub> comes from fuel combustion in motor vehicles, equipment, and industrial sources, residential and agricultural burning. Also formed from reaction of other pollutants (acid rain, NO <sub>x</sub> , SO <sub>x</sub> , organics).	Health Effectsasthma attacks and thenumber of hospitaladmissions has beenobserved in different parts ofthe U.S. and various areasaround the world. In recentyears, some studies havereported an associationbetween long-term exposureto air pollution dominated byfine particles and increasedmortality, reduction inlifespan, and an increasedmortality from lung cancer.Daily fluctuations in PM2.5concentration levels havealso been related to hospitaladmissions for acuterespiratory conditions inchildren, to school andkindergarten absences, to adecrease in respiratory lungvolumes in normal children,and to increased medicationuse in children and adultswith asthma. Recent studiesshow lung function growth inchildren is reduced with longterm exposure to particulatematter.The elderly, people with pre-existing respiratory orcardiovascular disease, andchildren appear to be moresusceptible to the effects ofhigh levels of PM10 and PM2.5.
VOC	VOCs are hydrocarbon compounds (any compound containing various combinations of hydrogen and carbon atoms) that exist in the ambient air. VOCs contribute to the formation of smog through atmospheric photochemical reactions and/or may be toxic. Compounds of carbon (also known as organic compounds) have different levels of reactivity; that is, they do not react at the same speed or do not	Organic chemicals are widely used as ingredients in household products. Paints, varnishes, and wax all contain organic solvents, as do many cleaning, disinfecting, cosmetic, degreasing and hobby products.	Breathing VOCs can irritate the eyes, nose, and throat, can cause difficulty breathing and nausea, and can damage the central nervous system as well as other organs. Some VOCs can cause cancer. Not all VOCs have all these health effects, though many have several.



Criteria Pollutant	Description	Sources	Health Effects
	form $O_3$ to the same extent when exposed to photochemical processes. VOCs often have an odor, and some examples include gasoline, alcohol, and the solvents used in paints. Exceptions to the VOC designation include CO, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate. VOCs are a criteria pollutant since they are a precursor to $O_3$ , which is a criteria pollutant. The terms VOC and ROG (see below) interchangeably.	Fuels are made up of organic chemicals. All of these products can release organic compounds while you are using them, and, to some degree, when they are stored.	
ROG	Similar to VOC, ROGs are also precursors in forming $O_3$ and consist of compounds containing methane, ethane, propane, butane, and longer chain hydrocarbons, which are typically the result of some type of combustion/decomposition process. Smog is formed when ROG and NO <sub>X</sub> react in the presence of sunlight. ROGs are a criteria pollutant since they are a precursor to $O_3$ , which is a criteria pollutant. The terms ROG and VOC (see previous) interchangeably.	Sources similar to VOCs.	Health effects similar to VOCs.
Lead (Pb)	Pb is a heavy metal that is highly persistent in the environment and is considered a criteria pollutant. In the past, the primary source of Pb in the air was emissions from vehicles burning leaded gasoline. The major sources of Pb emissions are ore and metals processing, particularly Pb smelters, and piston-engine aircraft operating on leaded aviation gasoline. Other stationary sources include waste incinerators, utilities, and lead-acid battery manufacturers. It should be noted that the Project does not include	Metal smelters, resource recovery, leaded gasoline, deterioration of Pb paint.	Fetuses, infants, and children are more sensitive than others to the adverse effects of Pb exposure. Exposure to low levels of Pb can adversely affect the development and function of the central nervous system, leading to learning disorders, distractibility, inability to follow simple commands, and lower intelligence quotient. In adults, increased Pb levels are associated with increased blood pressure.



Criteria Pollutant	Description	Sources	Health Effects		
	operational activities such as metal processing or Pb acid battery manufacturing. As such, the Project is not anticipated to generate a quantifiable amount of Pb emissions.		Pb poisoning can cause anemia, lethargy, seizures, and death; although it appears that there are no direct effects of Pb on the respiratory system. Pb can be stored in the bone from early age environmental exposure, and elevated blood Pb levels can occur due to breakdown of bone tissue during pregnancy, hyperthyroidism (increased secretion of hormones from the thyroid gland) and osteoporosis (breakdown of bony tissue). Fetuses and breast-fed babies can be exposed to higher levels of Pb because of previous environmental Pb exposure of their mothers.		
Odor	Odor means the perception experienced by a person when one or more chemical substances in the air come into contact with the human olfactory nerves (6).	Odors can come from many sources including animals, human activities, industry, natures, and vehicles.	Offensive odors can potentially affect human health in several ways. First, odorant compounds can irritate the eye, nose, and throat, which can reduce respiratory volume. Second, studies have shown that the VOCs that cause odors can stimulate sensory nerves to cause neurochemical changes that might influence health, for instance, by compromising the immune system. Finally, unpleasant odors can trigger memories or attitudes linked to unpleasant odors, causing cognitive and emotional effects such as stress.		



## 2.5 EXISTING AIR QUALITY

Existing air quality is measured at established SCAQMD air quality monitoring stations. Monitored air quality is evaluated in the context of ambient air quality standards. These standards are the levels of air quality that are considered safe, with an adequate margin of safety, to protect the public health and welfare. NAAQS and California Ambient Air Quality Standards (CAAQS) currently in effect are shown in Table 2-2 (7).

The determination of whether a region's air quality is healthful or unhealthful is determined by comparing contaminant levels in ambient air samples to the state and federal standards. At the time of this AQIA, the most recent state and federal standards were updated by CARB on May 4, 2016 and are presented in Table 2-2. The air quality in a region is considered to be in attainment by the state if the measured ambient air pollutant levels for O<sub>3</sub>, CO (except 8-hour Lake Tahoe), SO<sub>2</sub> (1 and 24 hour), NO<sub>2</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub> do not exceed standards. All others are not to be equaled or exceeded. It should be noted that the three-year period is presented for informational purposes and is not the basis for how the State assigns attainment status. Attainment status for a pollutant means that the SCAQMD meets the standards set by the EPA or the California EPA (CalEPA). Conversely, nonattainment means that an area has monitored air quality that does not meet the NAAQS or CAAQS standards. In order to improve air quality in nonattainment areas, CARB has implemented a State Implementation Plan (SIP). The SIP outlines the measures that the state would take to improve air quality. Once nonattainment areas meet the standards and additional redesignation requirements, the EPA would designate the area as a maintenance area (8).



Ambient Air Quality Standards							
Pollutant Averaging		California Standards <sup>1</sup>		National Standards <sup>2</sup>			
i onutant	Time	Concentration <sup>3</sup>	Method <sup>4</sup>	Primary <sup>3,5</sup>	Secondary 3,6	Method 7	
Ozone (O <sub>3</sub> ) <sup>8</sup>	1 Hour	0.09 ppm (180 µg/m <sup>3</sup> )	Ultraviolet Photometry	-	Same as	Ultraviolet	
	8 Hour	0.070 ppm (137 µg/m <sup>3</sup> )		0.070 ppm (137 µg/m <sup>3</sup> )	Primary Standard	Photometry	
Respirable Particulate	24 Hour	50 µg/m³	Gravimetric or	150 µg/m <sup>3</sup>	Same as	Inertial Separation and Gravimetric	
Matter (PM10) <sup>9</sup>	Annual Arithmetic Mean	20 µg/m <sup>3</sup>	Beta Attenuation	1	Primary Standard	Analysis	
Fine Particulate	24 Hour	_	—	35 µg/m <sup>3</sup>	Same as Primary Standard	Inertial Separation and Gravimetric	
Matter (PM2.5) <sup>9</sup>	Annual Arithmetic Mean	12 µg/m <sup>3</sup>	Gravimetric or Beta Attenuation	12.0 µg/m <sup>3</sup>	15 µg/m <sup>3</sup>	Analysis	
Carbon	1 Hour	20 ppm (23 mg/m <sup>3</sup> )	Neg Disession	35 ppm (40 mg/m <sup>3</sup> )	<del></del>	Non-Dispersive Infrared Photometry (NDIR)	
Monoxide (CO)	8 Hour	9.0 ppm (10 mg/m <sup>3</sup> )	Non-Dispersive Infrared Photometry (NDIR)	9 ppm (10 mg/m <sup>3</sup> )			
(00)	8 Hour (Lake Tahoe)	6 ppm (7 mg/m <sup>3</sup> )		2 <u>1 -</u> 2			
Nitrogen Dioxide	1 Hour	0.18 ppm (339 µg/m <sup>3</sup> )	Gas Phase	100 ppb (188 µg/m <sup>3</sup> )	_	Gas Phase	
(NO <sub>2</sub> ) <sup>10</sup>	Annual Arithmetic Mean	0.030 ppm (57 µg/m <sup>3</sup> )	Chemiluminescence	0.053 ppm (100 µg/m <sup>3</sup> )	Same as Primary Standard	Chemiluminescence	
	1 Hour	0.25 ppm (655 µg/m <sup>3</sup> )		75 ppb (196 µg/m <sup>3</sup> )	—	Ultraviolet Flourescence; Spectrophotometry (Pararosaniline Method)	
Sulfur Dioxide	3 Hour	-	Ultraviolet	-	0.5 ppm (1300 µg/m <sup>3</sup> )		
(SO <sub>2</sub> ) <sup>11</sup>	24 Hour	0.04 ppm (105 µg/m <sup>3</sup> )	Fluorescence	0.14 ppm (for certain areas) <sup>11</sup>	<u></u>		
	Annual Arithmetic Mean	—		0.030 ppm (for certain areas) <sup>11</sup>	-		
	30 Day Average	1.5 µg/m <sup>3</sup>		-	-	High Volume Sampler and Atomic Absorption	
Lead <sup>12,13</sup>	Calendar Quarter	-	Atomic Absorption	1.5 μg/m <sup>3</sup> (for certain areas) <sup>12</sup>	Same as		
	Rolling 3-Month Average	-		0.15 µg/m <sup>3</sup>	Primary Standard	· ·····	
Visibility Reducing Particles <sup>14</sup>	8 Hour	See footnote 14	Beta Attenuation and Transmittance through Filter Tape	No National			
Sulfates	24 Hour	25 µg/m <sup>3</sup>	Ion Chromatography				
Hydrogen Sulfide	1 Hour	0.03 ppm (42 µg/m <sup>3</sup> )	Ultraviolet Fluorescence				
Vinyl Chloride <sup>12</sup>	24 Hour	0.01 ppm (26 µg/m <sup>3</sup> )	Gas Chromatography				
See footnotes on next page							

#### TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (1 OF 2)

For more information please call ARB-PIO at (916) 322-2990

California Air Resources Board (5/4/16)



#### TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (2 OF 2)

- California standards for ozone, carbon monoxide (except 8-hour Lake Tahoe), sulfur dioxide (1 and 24 hour), nitrogen dioxide, and
  particulate matter (PM10, PM2.5, and visibility reducing particles), are values that are not to be exceeded. All others are not to be
  equaled or exceeded. California ambient air quality standards are listed in the Table of Standards in Section 70200 of Title 17 of the
  California Code of Regulations.
- 2. National standards (other than ozone, particulate matter, and those based on annual arithmetic mean) are not to be exceeded more than once a year. The ozone standard is attained when the fourth highest 8-hour concentration measured at each site in a year, averaged over three years, is equal to or less than the standard. For PM10, the 24 hour standard is attained when the expected number of days per calendar year with a 24-hour average concentration above 150 µg/m<sup>3</sup> is equal to or less than one. For PM2.5, the 24 hour standard is attained when 98 percent of the daily concentrations, averaged over three years, are equal to or less than the standard. Contact the U.S. EPA for further clarification and current national policies.
- 3. Concentration expressed first in units in which it was promulgated. Equivalent units given in parentheses are based upon a reference temperature of 25°C and a reference pressure of 760 torr. Most measurements of air quality are to be corrected to a reference temperature of 25°C and a reference pressure of 760 torr; ppm in this table refers to ppm by volume, or micromoles of pollutant per mole of gas.
- 4. Any equivalent measurement method which can be shown to the satisfaction of the ARB to give equivalent results at or near the level of the air quality standard may be used.
- 5. National Primary Standards: The levels of air quality necessary, with an adequate margin of safety to protect the public health.
- 6. National Secondary Standards: The levels of air quality necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant.
- 7. Reference method as described by the U.S. EPA. An "equivalent method" of measurement may be used but must have a "consistent relationship to the reference method" and must be approved by the U.S. EPA.
- 8. On October 1, 2015, the national 8-hour ozone primary and secondary standards were lowered from 0.075 to 0.070 ppm.
- 9. On December 14, 2012, the national annual PM2.5 primary standard was lowered from 15 µg/m<sup>3</sup> to 12.0 µg/m<sup>3</sup>. The existing national 24-hour PM2.5 standards (primary and secondary) were retained at 35 µg/m<sup>3</sup>, as was the annual secondary standard of 15 µg/m<sup>3</sup>. The existing 24-hour PM10 standards (primary and secondary) of 150 µg/m<sup>3</sup> also were retained. The form of the annual primary and secondary standards is the annual mean, averaged over 3 years.
- 10. To attain the 1-hour national standard, the 3-year average of the annual 98th percentile of the 1-hour daily maximum concentrations at each site must not exceed 100 ppb. Note that the national 1-hour standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the national 1-hour standard to the California standards the units can be converted from ppb to ppm. In this case, the national standard of 100 ppb is identical to 0.100 ppm.
- 11. On June 2, 2010, a new 1-hour SO<sub>2</sub> standard was established and the existing 24-hour and annual primary standards were revoked. To attain the 1-hour national standard, the 3-year average of the annual 99th percentile of the 1-hour daily maximum concentrations at each site must not exceed 75 ppb. The 1971 SO<sub>2</sub> national standards (24-hour and annual) remain in effect until one year after an area is designated for the 2010 standard, except that in areas designated nonattainment for the 1971 standards, the 1971 standards remain in effect until implementation plans to attain or maintain the 2010 standards are approved.

Note that the 1-hour national standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the 1-hour national standard to the California standard the units can be converted to ppm. In this case, the national standard of 75 ppb is identical to 0.075 ppm.

- 12. The ARB has identified lead and vinyl chloride as 'toxic air contaminants' with no threshold level of exposure for adverse health effects determined. These actions allow for the implementation of control measures at levels below the ambient concentrations specified for these pollutants.
- 13. The national standard for lead was revised on October 15, 2008 to a rolling 3-month average. The 1978 lead standard (1.5 µg/m<sup>3</sup> as a quarterly average) remains in effect until one year after an area is designated for the 2008 standard, except that in areas designated nonattainment for the 1978 standard, the 1978 standard remains in effect until implementation plans to attain or maintain the 2008 standard are approved.
- 14. In 1989, the ARB converted both the general statewide 10-mile visibility standard and the Lake Tahoe 30-mile visibility standard to instrumental equivalents, which are "extinction of 0.23 per kilometer" and "extinction of 0.07 per kilometer" for the statewide and Lake Tahoe Air Basin standards, respectively.

For more information please call ARB-PIO at (916) 322-2990

California Air Resources Board (5/4/16)



## 2.6 REGIONAL AIR QUALITY

Air pollution contributes to a wide variety of adverse health effects. The EPA has established NAAQS for six of the most common air pollutants: CO, Pb, O<sub>3</sub>, particulate matter ( $PM_{10}$  and  $PM_{2.5}$ ), NO<sub>2</sub>, and SO<sub>2</sub> which are known as criteria pollutants. The SCAQMD monitors levels of various criteria pollutants at 37 permanent monitoring stations and 5 single-pollutant source Pb air monitoring sites throughout the air district (9). On February 21, 2019, CARB posted the 2018 amendments to the state and national area designations. See Table 2-3 for attainment designations for the SCAB (10). Appendix 2.1 provides geographic representation of the state and federal attainment status for applicable criteria pollutants within the SCAB.

Criteria Pollutant	State Designation	Federal Designation
O <sub>3</sub> − 1-hour standard	Nonattainment	
O₃ – 8-hour standard	Nonattainment	Nonattainment
PM10	Nonattainment	Attainment
PM <sub>2.5</sub>	Nonattainment	Nonattainment
CO	Attainment	Unclassifiable/Attainment
NO <sub>2</sub>	Attainment	Unclassifiable/Attainment
SO <sub>2</sub>	Unclassifiable/Attainment	Unclassifiable/Attainment
Pb <sup>1</sup>	Attainment	Unclassifiable/Attainment

#### TABLE 2-3: ATTAINMENT STATUS OF CRITERIA POLLUTANTS IN THE SCAB

Note: See Appendix 2.1 for a detailed map of State/National Area Designations within the SCAB "-" = The national 1-hour  $O_3$  standard was revoked effective June 15, 2005.

## 2.7 LOCAL AIR QUALITY

The SCAQMD has designated general forecast areas and air monitoring areas (referred to as Source Receptor Areas [SRA]) throughout the district in order to provide Southern California residents about the air quality conditions. The Project site is located within the Metropolitan Riverside County 1 area (SRA 23). The Metropolitan Riverside County 1 monitoring station is located approximately 12.7 miles northwest of the Project site and reports air quality statistics for  $O_3$ , CO, NO<sub>2</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub>.

The most recent three (3) years of data available is shown on Table 2-4 and identifies the number of days ambient air quality standards were exceeded for the study area, which is considered to be representative of the local air quality at the Project site. Data for O<sub>3</sub>, CO, NO<sub>2</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub> for 2018 through 2020 was obtained from the SCAQMD Air Quality Data Tables (11). Additionally, data for SO<sub>2</sub> has been omitted as attainment is regularly met in the SCAB and few monitoring stations measure SO<sub>2</sub> concentrations.

<sup>&</sup>lt;sup>1</sup> The Federal nonattainment designation for lead is only applicable towards the Los Angeles County portion of the SCAB.



Dellutent		Year				
Pollutant	Standard		2019	2020		
O <sub>3</sub>						
Maximum Federal 1-Hour Concentration (ppm)		0.123	0.123	0.143		
Maximum Federal 8-Hour Concentration (ppm)		0.101	0.096	0.115		
Number of Days Exceeding State 1-Hour Standard	> 0.09 ppm	22	24	46		
Number of Days Exceeding State/Federal 8-Hour Standard	> 0.070 ppm	53	59	81		
СО						
Maximum Federal 1-Hour Concentration	> 35 ppm	2.2	1.5	1.9		
Maximum Federal 8-Hour Concentration	> 20 ppm	2.0	1.2	1.4		
NO <sub>2</sub>	·					
Maximum Federal 1-Hour Concentration	> 0.100 ppm	0.055	0.056	0.066		
Annual Federal Standard Design Value		0.014	0.014	0.014		
PM <sub>10</sub>						
Maximum Federal 24-Hour Concentration (µg/m <sup>3</sup> )	> 150 µg/m <sup>3</sup>	126	99	104		
Annual Federal Arithmetic Mean (μg/m <sup>3</sup> )		44.0	34.4	32.0		
Number of Days Exceeding Federal 24-Hour Standard	> 150 µg/m <sup>3</sup>	0	0	0		
Number of Days Exceeding State 24-Hour Standard	> 50 μg/m <sup>3</sup>	132	21	110		
PM <sub>2.5</sub>	·					
Maximum Federal 24-Hour Concentration (µg/m <sup>3</sup> )	> 35 µg/m <sup>3</sup>	50.70	46.70	41.00		
Annual Federal Arithmetic Mean (μg/m <sup>3</sup> )	> 12 µg/m <sup>3</sup>	12.41	11.13	12.63		
Number of Days Exceeding Federal 24-Hour Standard	> 35 µg/m³	2	4	4		

#### TABLE 2-4: PROJECT AREA AIR QUALITY MONITORING SUMMARY 2018-2020

ppm = Parts Per Million

 $\mu$ g/m<sup>3</sup> = Microgram per Cubic Meter Source: Data for O<sub>3</sub>, CO, NO<sub>2</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub> was obtained from SCAQMD Air Quality Data Tables.

### 2.8 REGULATORY BACKGROUND

### 2.8.1 FEDERAL REGULATIONS

The EPA is responsible for setting and enforcing the NAAQS for O<sub>3</sub>, CO, NO<sub>x</sub>, SO<sub>2</sub>, PM<sub>10</sub>, and Pb (12). The EPA has jurisdiction over emissions sources that are under the authority of the federal government including aircraft, locomotives, and emissions sources outside state waters (Outer Continental Shelf). The EPA also establishes emission standards for vehicles sold in states other than California. Automobiles sold in California must meet the stricter emission requirements of CARB.

The Federal Clean Air Act (CAA) was first enacted in 1955 and has been amended numerous times in subsequent years (1963, 1965, 1967, 1970, 1977, and 1990). The CAA establishes the federal air quality standards, the NAAQS, and specifies future dates for achieving compliance (13). The CAA also mandates that states submit and implement SIPs for local areas not meeting these

standards. These plans must include pollution control measures that demonstrate how the standards would be met.

The 1990 amendments to the CAA that identify specific emission reduction goals for areas not meeting the NAAQS require a demonstration of reasonable further progress toward attainment and incorporate additional sanctions for failure to attain or to meet interim milestones. The sections of the CAA most directly applicable to the development of the Project site include Title I (Non-Attainment Provisions) and Title II (Mobile Source Provisions) (14) (15). Title I provisions were established with the goal of attaining the NAAQS for the following criteria pollutants O<sub>3</sub>, NO<sub>2</sub>, SO<sub>2</sub>, PM<sub>10</sub>, CO, PM<sub>2.5</sub>, and Pb. The NAAQS were amended in July 1997 to include an additional standard for O<sub>3</sub> and to adopt a NAAQS for PM<sub>2.5</sub>. Table 2-3 (previously presented) provides the NAAQS within the SCAB.

Mobile source emissions are regulated in accordance with Title II provisions. These provisions require the use of cleaner burning gasoline and other cleaner burning fuels such as methanol and natural gas. Automobile manufacturers are also required to reduce tailpipe emissions of hydrocarbons and NO<sub>x</sub>. NO<sub>x</sub> is a collective term that includes all forms of NO<sub>x</sub> which are emitted as byproducts of the combustion process.

### 2.8.2 CALIFORNIA REGULATIONS

### CARB

CARB, which became part of the CalEPA in 1991, is responsible for ensuring implementation of the California Clean Air Act (AB 2595), responding to the federal CAA, and for regulating emissions from consumer products and motor vehicles. AB 2595 mandates achievement of the maximum degree of emissions reductions possible from vehicular and other mobile sources in order to attain the state ambient air quality standards by the earliest practical date. CARB established the CAAQS for all pollutants for which the federal government has NAAQS and, in addition, establishes standards for SO<sub>4</sub>, visibility, hydrogen sulfide (H<sub>2</sub>S), and vinyl chloride (C<sub>2</sub>H<sub>3</sub>Cl). However, at this time, H<sub>2</sub>S and C<sub>2</sub>H<sub>3</sub>Cl are not measured at any monitoring stations in the SCAB because they are not considered to be a regional air quality problem. Generally, the CAAQS are more stringent than the NAAQS (16) (12).

Local air quality management districts, such as the SCAQMD, regulate air emissions from stationary sources such as commercial and industrial facilities. All air pollution control districts have been formally designated as attainment or non-attainment for each CAAQS.

Serious non-attainment areas are required to prepare Air Quality Management Plans (AQMP) that include specified emission reduction strategies in an effort to meet clean air goals. These plans are required to include:

- Application of Best Available Retrofit Control Technology to existing sources;
- Developing control programs for area sources (e.g., architectural coatings and solvents) and indirect sources (e.g., motor vehicle use generated by residential and commercial development);
- A District permitting system designed to allow no net increase in emissions from any new or modified permitted sources of emissions;



- Implementing reasonably available transportation control measures and assuring a substantial reduction in growth rate of vehicle trips and miles traveled;
- Significant use of low emissions vehicles by fleet operators;
- Sufficient control strategies to achieve a 5% or more annual reduction in emissions or 15% or more in a period of three years for ROGs, NO<sub>x</sub>, CO and PM<sub>10</sub>. However, air basins may use alternative emission reduction strategy that achieves a reduction of less than 5% per year under certain circumstances.

#### TITLE 24 ENERGY EFFICIENCY STANDARDS AND CALIFORNIA GREEN BUILDING STANDARDS

California Code of Regulations (CCR) Title 24 Part 6: The California Energy Code was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption.

The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. CCR, Title 24, Part 11: California Green Building Standards Code (CALGreen) is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on January 1, 2009, and is administered by the California Building Standards Commission.

CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2019 California Green Building Code Standards that became effective January 1, 2020.

Local jurisdictions are permitted to adopt more stringent requirements, as state law provides methods for local enhancements. CALGreen recognizes that many jurisdictions have developed existing construction waste and demolition ordinances and defers to them as the ruling guidance provided they establish a minimum 65% diversion requirement.

The code also provides exemptions for areas not served by construction waste and demolition recycling infrastructure. The State Building Code provides the minimum standard that buildings must meet in order to be certified for occupancy, which is generally enforced by the local building official.

Energy efficient buildings require less electricity; therefore, increased energy efficiency reduces fossil fuel consumption and decreases greenhouse gas (GHG) emissions. The 2019 version of Title 24 was adopted by the CEC) and became effective on January 1, 2020.

The 2019 Title 24 standards would result in less energy use, thereby reducing air pollutant emissions associated with energy consumption in the SCAB and across the State of California. For example, the 2019 Title 24 standards require solar photovoltaic systems for new homes, establish requirements for newly constructed healthcare facilities, encourage demand responsive technologies for residential buildings, and update indoor and outdoor lighting requirements for nonresidential buildings.

The CEC anticipates that single-family homes built with the 2019 standards would use approximately 7% less energy compared to the residential homes built under the 2016 standards. Additionally, after implementation of solar photovoltaic systems, homes built under the 2019 standards would use about 53% less energy than homes built under the 2016 standards.

Nonresidential buildings (such as the Project) would use approximately 30% less energy due to lighting upgrade requirements (18).

Because the Project would be constructed after January 1, 2019, the 2019 CALGreen standards are applicable to the Project and require, among other items (19):

- Short-term bicycle parking. If the new project or an additional alteration is anticipated to generate visitor traffic, provide permanently anchored bicycle racks within 200 feet of the visitors' entrance, readily visible to passers-by, for 5% of new visitor motorized vehicle parking spaces being added, with a minimum of one two-bike capacity rack (5.106.4.1.1).
- Long-term bicycle parking. For new buildings with tenant spaces that have 10 or more tenantoccupants, provide secure bicycle parking for 5% of the tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility (5.106.4.1.2).
- Designated parking for clean air vehicles. In new projects or additions to alterations that add 10 or more vehicular parking spaces, provide designated parking for any combination of low-emitting, fuel-efficient and carpool/van pool vehicles as shown in Table 5.106.5.2 (5.106.5.2).
- Electric vehicle (EV) charging stations. New construction shall facilitate the future installation of EV supply equipment. The compliance requires empty raceways for future conduit and documentation that the electrical system has adequate capacity for the future load. The number of spaces to be provided for is contained in Table 5.106. 5.3.3 (5.106.5.3).
- Outdoor light pollution reduction. Outdoor lighting systems shall be designed to meet the backlight, uplight and glare ratings per Table 5.106.8 (5.106.8)
- Construction waste management. Recycle and/or salvage for reuse a minimum of 65% of the nonhazardous construction and demolition waste in accordance with Section
- 5.408.1.1. 5.405.1.2, or 5.408.1.3; or meet a local construction and demolition waste management ordinance, whichever is more stringent (5.408.1).
- Excavated soil and land clearing debris. 100% of trees, stumps, rocks and associated vegetation and soils resulting primarily from land clearing shall be reused or recycled. For a phased project, such material may be stockpiled on site until the storage site is developed (5.408.3).
- Recycling by Occupants. Provide readily accessible areas that serve the entire building and are identified for the depositing, storage, and collection of non-hazardous materials for recycling, including (at a minimum) paper, corrugated cardboard, glass, plastics, organic waste, and metals or meet a lawfully enacted local recycling ordinance, if more restrictive (5.410.1).
- Water conserving plumbing fixtures and fittings. Plumbing fixtures (water closets and urinals) and fittings (faucets and showerheads) shall comply with the following:
  - Water Closets. The effective flush volume of all water closets shall not exceed 1.28 gallons per flush (5.303.3.1)
  - Urinals. The effective flush volume of wall-mounted urinals shall not exceed 0.125 gallons per flush (5.303.3.2.1). The effective flush volume of floor-mounted or other urinals shall not exceed 0.5 gallons per flush (5.303.3.2.2).
  - Showerheads. Single showerheads shall have a minimum flow rate of not more than 1.8 gallons per minute and 80 psi (5.303.3.3.1). When a shower is served by more than one showerhead, the combine flow rate of all showerheads and/or other shower outlets controlled by a single valve shall not exceed 1.8 gallons per minute at 80 psi (5.303.3.2.2).



- Faucets and fountains. Nonresidential lavatory faucets shall have a maximum flow rate of not more than 0.5 gallons per minute at 60 psi (5.303.3.4.1). Kitchen faucets shall have a maximum flow rate of not more than 1.8 gallons per minute of 60 psi (5.303.3.4.2). Wash fountains shall have a maximum flow rate of not more than 1.8 gallons per minute (5.303.3.4.3). Metering faucets shall not deliver more than 0.20 gallons per cycle (5.303.3.4.4). Metering faucets for wash fountains shall have a maximum flow rate not more than 0.20 gallons per cycle (5.303.3.4.5).
- Outdoor potable water uses in landscaped areas. Nonresidential developments shall comply with a local water efficient landscape ordinance or the current California Department of Water Resources' Model Water Efficient (MWELO), whichever is more stringent (5.304.1).
- Water meters. Separate submeters or metering devices shall be installed for new buildings or additions in excess of 50,000 sf or for excess consumption where any tenant within a new building or within an addition that is project to consume more than 1,000 gallons per day (5.303.1.1 and 5.303.1.2).
- Outdoor water uses in rehabilitated landscape projects equal or greater than 2,500 sf. Rehabilitated landscape projects with an aggregate landscape area equal to or greater than 2,500 sf requiring a building or landscape permit (5.304.3).
- Commissioning. For new buildings 10,000 sf and over, building commissioning shall be included in the design and construction processes of the building project to verify that the building systems and components meet the owner's or owner representative's project requirements (5.410.2).

### 2.8.3 AQMP

Currently, the NAAQS and CAAQS are exceeded in most parts of the SCAB. In response, the SCAQMD has adopted a series of AQMP to meet the state and federal ambient air quality standards (17). AQMPs are updated regularly in order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy. A detailed discussion on the AQMP and Project consistency with the AQMP is provided in Section 3.10.

### 2.9 REGIONAL AIR QUALITY IMPROVEMENT


The Project is within the jurisdiction of the SCAQMD. In 1976, California adopted the Lewis Air Quality Management Act which created SCAQMD from a voluntary association of air pollution control districts in Los Angeles, Orange, Riverside, and San Bernardino counties. The geographic area of which SCAQMD consists is known as the SCAB. SCAQMD develops comprehensive plans and regulatory programs for the region to attain federal standards by dates specified in federal law. The agency is also responsible for meeting state standards by the earliest date achievable, using reasonably available control measures.

SCAQMD rule development through the 1970s and 1980s resulted in dramatic improvement in SCAB air quality. Nearly all control programs developed through the early 1990s relied on (i) the development and application of cleaner technology; (ii) add-on emission controls, and (iii) uniform CEQA review throughout the SCAB. Industrial emission sources have been significantly reduced by this approach and vehicular emissions have been reduced by technologies implemented at the state level by CARB.



As discussed above, the SCAQMD is the lead agency charged with regulating air quality emission reductions for the entire SCAB. SCAQMD created AQMPs which represent a regional blueprint for achieving healthful air on behalf of the 16 million residents of the SCAB. The 2012 AQMP states, "the remarkable historical improvement in air quality since the 1970's is the direct result of Southern California's comprehensive, multiyear strategy of reducing air pollution from all sources as outlined in its AQMPs," (18).

Emissions of  $O_3$ ,  $NO_x$ , VOC, and CO have been decreasing in the SCAB since 1975 and are projected to continue to decrease through 2020 (19). These decreases result primarily from motor vehicle controls and reductions in evaporative emissions. Although vehicle miles traveled (VMT) in the SCAB continue to increase,  $NO_x$  and VOC levels are decreasing because of the mandated controls on motor vehicles and the replacement of older polluting vehicles with loweremitting vehicles.  $NO_x$  emissions from electric utilities have also decreased due to use of cleaner fuels and renewable energy.  $O_3$  contour maps show that the number of days exceeding the 8hour NAAQS has generally decreased between 1980 and 2019. For 2019, there was an overall decrease in exceedance days compared with the 1980 period. However, as shown on Table 2-5,  $O_3$  levels have increased in the past three years due to higher temperatures and stagnant weather conditions. Notwithstanding,  $O_3$  levels in the SCAB have decreased substantially over the last 30 years with the current maximum measured concentrations being approximately one-third of concentrations within the late 70's (20).

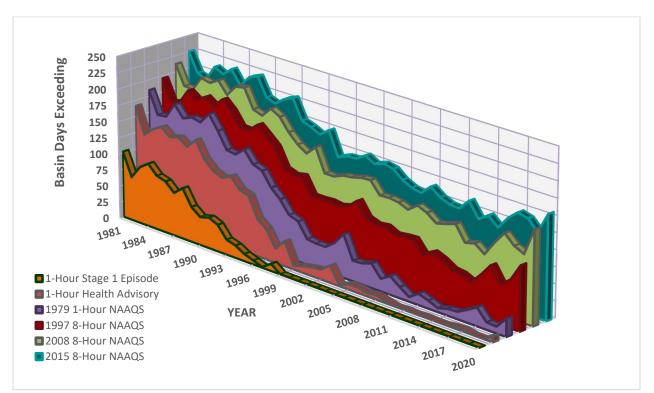



Source: 2020 SCAQMD, Historical  $O_3$  Air Quality Trends (1976-2019)



The overall trends of  $PM_{10}$  and  $PM_{2.5}$  levels in the air (not emissions) show an overall improvement since 1975. Direct emissions of  $PM_{10}$  have remained somewhat constant in the SCAB and direct emissions of  $PM_{2.5}$  have decreased slightly since 1975. Area wide sources (fugitive dust from roads, dust from construction, and other sources) contribute the greatest amount of direct particulate matter emissions.

As with other pollutants, the most recent  $PM_{10}$  statistics show an overall improvement as illustrated in Tables 2-6 and 2-7. During the period for which data are available, the 24-hour national annual average concentration for  $PM_{10}$  decreased by approximately 54%, from 103.7 microgram per cubic meter ( $\mu g/m^3$ ) in 1988 to 47.5  $\mu g/m^3$  in 2019 (21). Although the values are below the federal standard, it should be noted that there are days within the year where the concentrations would exceed the threshold. The 24-hour state annual average for emissions for  $PM_{10}$ , have decreased by approximately 56% since 1988 (21). Although data in the late 1990's show some variability, this is probably due to the advances in meteorological science rather than a change in emissions. Similar to the ambient concentrations, the calculated number of days above the 24-hour PM<sub>10</sub> standards has also shown an overall drop.

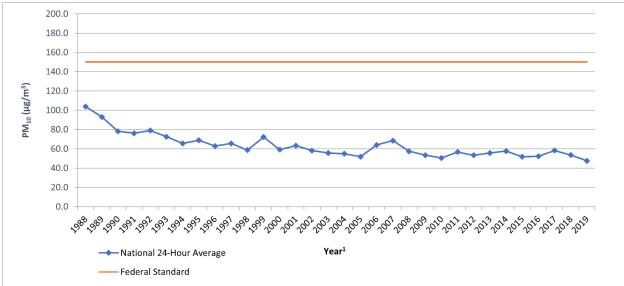


TABLE 2-6: SCAB AVERAGE 24-HOUR CONCENTRATION PM10 TREND (BASED ON FEDERAL STANDARD)<sup>1</sup>

Source: 2020 CARB, iADAM: Top Four Summary: PM10 24-Hour Averages (1988-2018)

<sup>1</sup> Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.

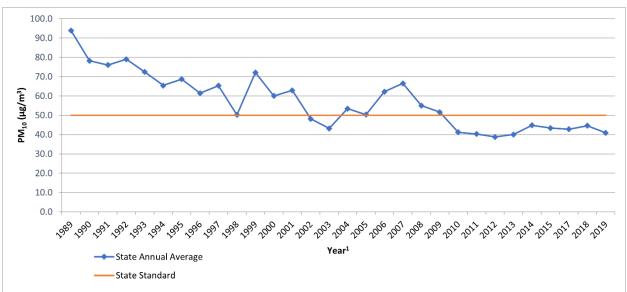


TABLE 2-7: SCAB ANNUAL AVERAGE CONCENTRATION PM10 TREND (BASED ON STATE STANDARD)<sup>1</sup>

Source: 2020 CARB, iADAM: Top Four Summary: PM<sub>10</sub> 24-Hour Averages (1988-2018)

<sup>1</sup> Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.

Tables 2-8 and 2-9 shows the most recent 24-hour average PM<sub>2.5</sub> concentrations in the SCAB from 1999 through 2019. Overall, the national and state annual average concentrations have decreased by almost 58% and 35% respectively (21). It should be noted that the SCAB is currently designated as nonattainment for the state and federal PM<sub>2.5</sub> standards.

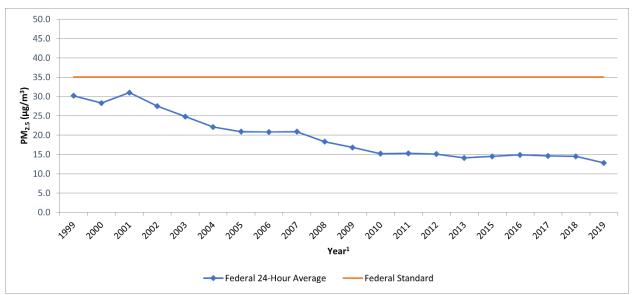


TABLE 2-8: SCAB 24-HOUR AVERAGE CONCENTRATION PM2.5 TREND (BASED ON FEDERAL STANDARD)<sup>1</sup>

Source: 2020 CARB, iADAM: Top Four Summary: PM<sub>2.5</sub> 24-Hour Averages (1999-2018) <sup>1</sup> Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.



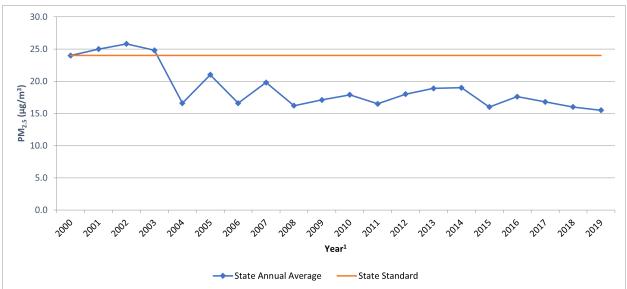


TABLE 2-9: SCAB ANNUAL AVERAGE CONCENTRATION PM2.5 TREND (BASED ON STATE STANDARD)<sup>1</sup>

Source: 2020 CARB, iADAM: Top Four Summary: PM<sub>2.5</sub> 24-Hour Averages (1999-2018)

<sup>1</sup>Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.

While the 2012 AQMP PM<sub>10</sub> attainment demonstration and the 2015 associated supplemental SIP submission indicated that attainment of the 24-hour standard was predicted to occur by the end of 2015, it could not anticipate the effect of the ongoing drought on the measured PM<sub>2.5</sub>.


The 2006 to 2010 base period used for the 2012 attainment demonstration had near-normal rainfall. While the trend of PM<sub>2.5</sub>-equivalent emission reductions continued through 2015, the severe drought conditions contributed to the PM<sub>2.5</sub> increases observed after 2012. As a result of the disrupted progress toward attainment of the federal 24-hour PM<sub>2.5</sub> standard, SCAQMD submitted a request and the EPA approved, in January 2016, a "bump up" to the nonattainment classification from "moderate" to "serious," with a new attainment deadline as soon as practicable, but not beyond December 31, 2019. As of March 14, 2019, the EPA approved portions of a SIP revision submitted by California to address CAA requirements for the 2006 24-hour PM<sub>2.5</sub> NAAQS in the Los Angeles-SCAB Serious PM<sub>2.5</sub> nonattainment area. The EPA also approved 2017 and 2019 motor vehicle emissions budgets for transportation conformity purposes and inter-pollutant trading ratios for use in transportation conformity analyses (22).

In March 2017, the SCAQMD released the Final 2016 AQMP. The 2016 AQMP continues to evaluate current integrated strategies and control measures to meet the NAAQS, as well as explore new and innovative methods to reach its goals. Some of these approaches include utilizing incentive programs, recognizing existing co-benefit programs from other sectors, and developing a strategy with fair-share reductions at the federal, state, and local levels (23). Similar to the 2012 AQMP, the 2016 AQMP incorporates scientific and technological information and planning assumptions, including the 2016-2040 Regional Transportation Plan/Sustainable Communities Strategy (2016-2040 RTP/SCS) and updated emission inventory methodologies for various source categories (17).



The 2022 AQMP is currently being developed by SCAQMD to address the EPA's strengthened ozone standard. Development of the 2022 AQMP is in its early stages and no formal timeline for completion and adoption is currently known.

The most recent CO concentrations in the SCAB are shown in Table 2-10 (21). CO concentrations in the SCAB have decreased markedly — a total decrease of more about 80% in the peak 8-hour concentration from 1986 to 2012. It should be noted 2012 is the most recent year where 8-hour CO averages and related statistics are available in the SCAB. The number of exceedance days has also declined. The entire SCAB is now designated as attainment for both the state and national CO standards. Ongoing reductions from motor vehicle control programs should continue the downward trend in ambient CO concentrations.

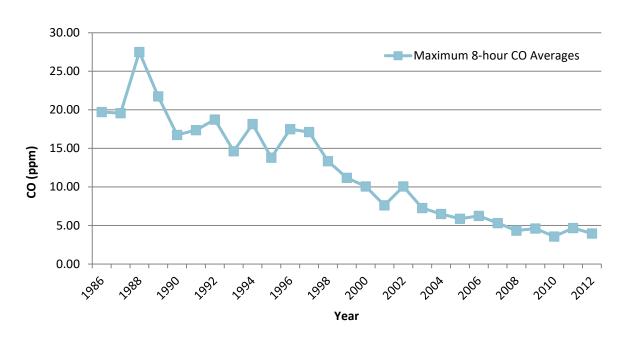

# TABLE 2-10: SCAB 8-HOUR AVERAGE CONCENTRATION CO TREND<sup>1</sup>

Source: 2020 CARB, iADAM: Top Four Summary: CO 8-Hour Averages (1999-2018) <sup>1</sup> The most recent year where 8-hour concentration data is available is 2012.

Part of the control process of the SCAQMD's duty to greatly improve the air quality in the SCAB is the uniform CEQA review procedures required by SCAQMD's *CEQA Air Quality Handbook* (1993) (1993 CEQA Handbook) (24). The single threshold of significance used to assess Project direct and cumulative impacts has in fact "worked" as evidenced by the track record of the air quality in the SCAB dramatically improving over the course of the past decades. As stated by the SCAQMD, the District's thresholds of significance are based on factual and scientific data and are therefore appropriate thresholds of significance to use for this Project.

The most recent NO<sub>2</sub> data for the SCAB is shown in Tables 2-11 and 2-12 (21). Over the last 50 years, NO<sub>2</sub> values have decreased significantly; the peak 1-hour national and state averages for 2019 is approximately 81% lower than what it was during 1963. The SCAB attained the State 1-hour NO<sub>2</sub> standard in 1994, bringing the entire state into attainment. A new state annual average



standard of 0.030 ppm was adopted by CARB in February 2007 (25). The new standard is just barely exceeded in the SCAQMD. NO<sub>2</sub> is formed from NO<sub>x</sub> emissions, which also contribute to O<sub>3</sub>. As a result, the majority of the future emission control measures would be implemented as part of the overall O<sub>3</sub> control strategy. Many of these control measures would target mobile sources, which account for more than three-quarters of California's NO<sub>x</sub> emissions. These measures are expected to bring the SCAQMD into attainment of the state annual average standard.


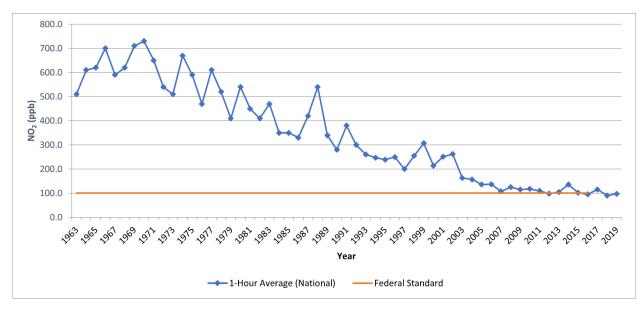


TABLE 2-11: SCAB 1-HOUR AVERAGE CONCENTRATION NO<sub>2</sub> TREND (BASED ON FEDERAL STANDARD)

Source: 2020 CARB, iADAM: Top Four Summary: CO 1-Hour Averages (1963-2018)



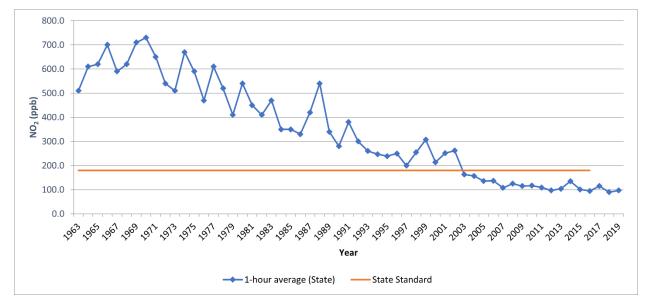

Source: 2020 CARB, iADAM: Top Four Summary: CO 1-Hour Averages (1963-2018)



# 2.9.1 TOXIC AIR CONTAMINANTS (TAC) TRENDS

In 1984, as a result of public concern for exposure to airborne carcinogens, CARB adopted regulations to reduce the amount of TAC emissions resulting from mobile and area sources, such as cars, trucks, stationary sources, and consumer products. According to the *Ambient and Emission Trends of Toxic Air Contaminants in California* journal article (26) which was prepared for CARB, results show that between 1990-2012, ambient concentration and emission trends for the seven TACs responsible for most of the known cancer risk associated with airborne exposure in California have declined significantly (between 1990 and 2012). The seven TACs studied include those that are derived from mobile sources: diesel particulate matter (DPM), benzene (C<sub>6</sub>H<sub>6</sub>), and 1,3-butadiene (C<sub>4</sub>H<sub>6</sub>); those that are derived from stationary sources: perchloroethylene (C<sub>2</sub>Cl<sub>4</sub>) and hexavalent chromium (Cr(VI)); and those derived from photochemical reactions of emitted VOCs: formaldehyde (CH<sub>2</sub>O) and acetaldehyde (C<sub>2</sub>H<sub>4</sub>O)<sup>2</sup>. The decline in ambient concentration and emission trends of these TACs are a result of various regulations CARB has implemented to address cancer risk.

# MOBILE SOURCE TACS


CARB introduced two programs that aimed at reducing mobile emissions for light and medium duty vehicles through vehicle emissions controls and cleaner fuel. In California, light-duty vehicles sold after 1996 are equipped with California's second-generation On-Board Diagnostic (OBD-II) system. The OBD-II system monitors virtually every component that can affect the emission performance of the vehicle to ensure that the vehicle remains as clean as possible over its entire life and assists repair technicians in diagnosing and fixing problems with the computerized engine controls. If a problem is detected, the OBD-II system illuminates a warning lamp on the vehicle instrument panel to alert the driver. This warning lamp typically contains the phrase "Check Engine" or "Service Engine Soon". The system would also store important information about the detected malfunction so that a repair technician can accurately find and fix the problem. CARB has recently developed similar OBD requirements for heavy-duty vehicles over 14,000 pounds (lbs). CARB's phase II Reformulated Gasoline Regulation (RFG-2), adopted in 1996, also led to a reduction of mobile source emissions. Through such regulations, benzene levels declined 88% from 1990-2012. 1,3-Butadiene concentrations also declined 85% from 1990-2012 as a result of the use of reformulated gasoline and motor vehicle regulations (26).

In 2000, CARB's Diesel Risk Reduction Plan (DRRP) recommended the replacement and retrofit of diesel-fueled engines and the use of ultra-low-sulfur (<15 ppm) diesel fuel. As a result of these measures, DPM concentrations have declined 68% since 2000, even though the state's population increased 31% and the amount of diesel vehicles miles traveled increased 81%, as shown on Exhibit 2-B. With the implementation of these diesel-related control regulations, CARB expects a DPM decline of 71% for 2000-2020.

 $<sup>^2</sup>$  It should be noted that ambient DPM concentrations are not measured directly. Rather, a surrogate method using the coefficient of haze (COH) and elemental carbon (EC) is used to estimate DPM concentrations.





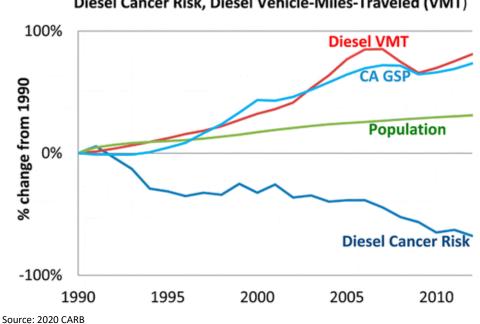

#### California Population, Gross State Product (GSP), Diesel Cancer Risk, Diesel Vehicle-Miles-Traveled (VMT)

#### DIESEL REGULATIONS

CARB and the Ports of Los Angeles and Long Beach (POLA and POLB) have adopted several iterations of regulations for diesel trucks that are aimed at reducing DPM. More specifically, CARB Drayage Truck Regulation (27), CARB statewide On-road Truck and Bus Regulation (28), and the Ports of Los Angeles and Long Beach Clean Truck Program (CTP) require accelerated implementation of "clean trucks" into the statewide truck fleet (29). In other words, older more polluting trucks would be replaced with newer, cleaner trucks as a function of these regulatory requirements.

Moreover, the average statewide DPM emissions for Heavy Duty Trucks (HDT), in terms of grams of DPM generated per mile traveled, would dramatically be reduced due to the aforementioned regulatory requirements.

Construction consists of several types of off-road equipment. Since the majority of the off-road construction equipment used for construction projects are diesel fueled, CalEEMod assumes all of the equipment operates on diesel fuel (30). As such, diesel-related emissions identified in this analysis would therefore overstate future DPM emissions since not all the regulatory requirements are reflected in the modeling.

#### CANCER RISK TRENDS

Based on information available from CARB, overall cancer risk throughout the SCAB has had a declining trend since 1990. In 1998, following an exhaustive 10-year scientific assessment process, CARB identified particulate matter from diesel-fueled engines as a toxic air



contaminant. The SCAQMD initiated a comprehensive urban toxic air pollution study called the Multiple Air Toxics Exposure Study (MATES). DPM accounts for more than 70% of the cancer risk.

In January 2018, as part of the overall effort to reduce air toxics exposure in the SCAB, SCAQMD began conducting the MATES V Program. MATES V field measurements were conducted at ten fixed sites (the same sites selected for MATES III and IV) to assess trends in air toxics levels. MATES V also included measurements of ultrafine particles (UFP) and black carbon (BC) concentrations, which can be compared to the UFP levels measured in MATES IV (31). The draft report for the MATES V study was published in late May and the comment submission deadline on June 7, 2021. In addition to new measurements and updated modeling results, several key updates were implemented in MATES V. First, MATES V estimates cancer risks by taking into account multiple exposure pathways, which includes inhalation and non-inhalation pathways. This approach is consistent with how cancer risks are estimated in South Coast AQMD's programs such as permitting, Air Toxics Hot Spots (AB2588), and CEQA. Previous MATES studies quantified the cancer risks based on the inhalation pathway only. Second, along with cancer risk estimates, MATES V includes information on the chronic non-cancer risks from inhalation and noninhalation pathways for the first time. Cancer risks and chronic non-cancer risks from MATES II through IV measurements have been re-examined using current Office of Environmental Health Hazard Assessment (OEHHA) and CalEPA risk assessment methodologies and modern statistical methods to examine the trends over time (32).

MATES-V calculated cancer risks based on monitoring data collected at ten fixed sites within the SCAB. None of the fixed monitoring sites are within the local area of the Project site. However, MATES-V has extrapolated the excess cancer risk levels throughout the SCAB by modeling the specific grids. The Project is located within a quadrant of the geographic grid of the MATES-V model which predicted a cancer risk of 293 in one million for the area containing the Project site. DPM is included in this cancer risk along with all other TAC sources. As in previous MATES iterations, diesel PM is the largest contributor to overall air toxics cancer risk. However, the average levels of diesel PM in MATES V are 53% lower at the 10 monitoring sites compared to MATES IV. Cumulative Project generated TACs are limited to DPM.



This page intentionally left blank



# **3 PROJECT AIR QUALITY IMPACT**

# 3.1 INTRODUCTION

This study quantifies air quality emissions generated by construction and operation of the Project and addresses whether the Project conflicts with implementation of the SCAQMD's AQMP and Lead Agency planning regulations. The analysis of Project-generated air emissions determines whether the Project would result in a cumulatively considerable net increase of any criteria pollutant for which the SCAB is in non-attainment under an applicable NAAQS and CAAQS. Additionally, the Project has been evaluated to determine whether the Project would expose sensitive receptors to substantial pollutant concentrations and the impacts of odors. The significance of these potential impacts is described in the following sections.

# **3.2** STANDARDS OF SIGNIFICANCE

The criteria used to determine the significance of potential Project-related air quality impacts are taken from the *CEQA Guidelines* (14 CCR §§15000, et seq.). Based on these thresholds, a project would result in a significant impact related to air quality if it would (1):

- Conflict with or obstruct implementation of the applicable air quality plan.
- Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard.
- Expose sensitive receptors to substantial pollutant concentrations.
- Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.

The SCAQMD has also developed regional significance thresholds for other regulated pollutants, as summarized at Table 3-1 (33). The SCAQMD's *CEQA Air Quality Significance Thresholds* (April 2019) indicate that any projects in the SCAB with daily emissions that exceed any of the indicated thresholds should be considered as having an individually and cumulatively significant air quality impact.

		1
Pollutant	Regional Construction Threshold	<b>Regional Operational Thresholds</b>
NOx	100 lbs/day	55 lbs/day
VOC	75 lbs/day	55 lbs/day
PM <sub>10</sub>	150 lbs/day	150 lbs/day
PM <sub>2.5</sub>	55 lbs/day	55 lbs/day
SO <sub>x</sub>	150 lbs/day	150 lbs/day
СО	550 lbs/day	550 lbs/day
Pb	3 lbs/day	3 lbs/day

#### TABLE 3-1: MAXIMUM DAILY REGIONAL EMISSIONS THRESHOLDS

lbs/day = Pounds Per Day



# 3.3 MODELS EMPLOYED TO ANALYZE AIR QUALITY

# 3.3.1 CALEEMOD

Land uses such as the Project affect air quality through construction-source and operationalsource emissions.

In May 2021, the SCAQMD, in conjunction with the California Air Pollution Control Officers Association (CAPCOA) and other California air districts, released the latest version of the CalEEMod Version 2020.4.0. The purpose of this model is to calculate construction-source and operational-source criteria pollutant (VOCs, NOx, SOx, CO, PM<sub>10</sub>, and PM<sub>2.5</sub>) and GHG emissions from direct and indirect sources; and quantify applicable air quality and GHG reductions achieved from MMs (34). Accordingly, the latest version of CalEEMod has been used for this Project to determine construction and operational air quality emissions. Output from the model runs for both construction and operational activity are provided in Appendices 3.1 and 3.2.

# **3.4 CONSTRUCTION EMISSIONS**

# **3.4.1 CONSTRUCTION ACTIVITIES**

Construction activities associated with the Project would result in emissions of VOCs, NO<sub>x</sub>, SO<sub>x</sub>, CO, PM<sub>10</sub>, and PM<sub>2.5</sub>. Construction related emissions are expected from the following construction activities:

- Site Preparation
- Grading (including Blasting)
- Building Construction
- Paving
- Architectural Coating

# **BLASTING ACTIVITIES**

The whole Project site will require blasting. The site will be divided into approximately 9 smaller areas with 1 blasting event occurring in each area. Nonetheless, the emissions effects of blasting are analyzed in this AQIA. The estimated emissions of NOx, CO, and SOx from explosives used for blasting were determined using emission factors in Section 13.3 (Explosives Detonation) of AP-42 (EPA 1980), and PM10 and PM2.5 emissions were determined using Section 11.9 of AP-42 (35). According to AP-42, "Unburned hydrocarbons also result from explosions, but in most instances, methane is the only species that has been reported" (EPA 1980); methane is not a VOC, and a methane emission factor has not been determined for ammonium nitrate/fuel oil (ANFO). Additional details on the emissions calculation associated with blasting are provided in Appendix 3.3.

#### **GRADING ACTIVITIES**

Dust is typically a major concern during grading activities. Because such emissions are not amenable to collection and discharge through a controlled source, they are called "fugitive



emissions". Fugitive dust emissions rates vary as a function of many parameters (soil silt, soil moisture, wind speed, area disturbed, number of vehicles, depth of disturbance or excavation, etc.). CalEEMod was utilized to calculate fugitive dust emissions resulting from this phase of activity. The Project would require 4,000 cubic yards of import which would generate a total of 500 hauling trips.

#### **ON-ROAD TRIPS**

Construction generates on-road vehicle emissions from vehicle usage for workers, hauling, and vendors commuting to and from the site. The number of workers, hauling, and vendor trips are presented below in Table 3-2. It should be noted that for Vendor Trips, specifically, CalEEMod only assigns Vendor Trips to the Building Construction phase. Vendor trips would likely occur during all phases of construction. As such, the CalEEMod defaults for Vendor Trips have been adjusted based on a ratio of the total vendor trips to the number of days of each subphase of activity.

Phase Name	Worker Trips Per Day	Vendor Trips Per Day	Hauling Trips Per Day
Site Preparation	18	3	0
Grading (including Blasting)	20	8	500
Building Construction	278	82	0
Paving	15	5	0
Architectural Coating	56	11	0

#### TABLE 3-2: CONSTRUCTION TRIP ASSUMPTIONS

#### **3.4.2** CONSTRUCTION DURATION

For purposes of analysis, construction of Project is expected to commence in February 2022 and would last through August 2023. The construction schedule utilized in the analysis, shown in Table 3-3, represents a "worst-case" analysis scenario should construction occur any time after the respective dates since emission factors for construction decrease as time passes and the analysis year increases due to emission regulations becoming more stringent<sup>3</sup>. The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per *CEQA Guidelines* (1).

#### **3.4.3** CONSTRUCTION EQUIPMENT

Consistent with industry standards and typical construction practices, each piece of equipment listed in Table 3-4 would operate up to a total of eight (8) hours per day, or more than two-thirds of the period during which construction activities are allowed pursuant to the County's Municipal Code.

<sup>&</sup>lt;sup>3</sup> As shown in the CalEEMod User's Guide Version 2020.4.0, Section 4.3 "OFFROAD Equipment" as the analysis year increases, emission factors for the same equipment pieces decrease due to the natural turnover of older equipment being replaced by newer less polluting equipment and new regulatory requirements.



Phase Name	Start Date	End Date	Days
Site Preparation	02/07/2022	02/18/2022	10
Grading (including Blasting)	02/19/2022	04/01/2022	30
Building Construction	04/02/2022	05/26/2023	300
Paving	05/27/2023	06/23/2023	20
Architectural Coating	06/24/2023	08/18/2023	40

#### TABLE 3-3: CONSTRUCTION DURATION

#### TABLE 3-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS

Phase Name	Equipment <sup>1</sup>	Amount	Hours Per Day
Cita Duana antian	Crawler Tractors	4	8
Site Preparation	Rubber Tired Dozers	3	8
	Crawler Tractors	2	8
	Excavators	2	8
Grading	Graders	1	8
	Rubber Tired Dozers	1	8
	Scrapers	2	8
	Cranes	1	8
	Forklifts	3	8
Building Construction	Generator Sets	1	8
	Tractors/Loaders/Backhoes	3	8
	Welders	1	8
	Pavers	2	8
Paving	Paving Equipment	2	8
	Rollers	2	8
Architectural Coating	Air Compressors	1	8

<sup>1</sup> In order to account for fugitive dust emissions, Crawler Tractors were used in lieu of Tractors/Loaders/Backhoes.

#### 3.4.4 CONSTRUCTION EMISSIONS SUMMARY

#### IMPACTS WITHOUT MITIGATION

The estimated maximum daily construction emissions without mitigation are summarized on Table 3-5. Detailed construction model outputs are presented in Appendix 3.1. Under the assumed scenarios, emissions resulting from the Project construction will not exceed the thresholds established by the SCAQMD for emissions of any criteria pollutant.



Veer		Emissions (lbs/day) <sup>1</sup>					
Year	VOC	NOx	со	SOx	PM10	PM2.5	
		Summer					
2022	4.55	51.78	37.61	0.29	47.62	12.00	
2023	51.39	18.74	28.61	0.07	4.42	1.71	
		Winter					
2022	4.54	51.91	37.47	0.29	47.62	12.00	
2023	51.38	18.93	26.73	0.07	4.42	1.71	
Maximum Daily Emissions	51.39	51.91	37.61	0.29	47.62	12.00	
SCAQMD Regional Threshold	75	100	550	150	150	55	
Threshold Exceeded?	NO	NO	NO	NO	NO	NO	

#### TABLE 3-5: OVERALL CONSTRUCTION EMISSIONS SUMMARY – WITHOUT MITIGATION

Source: CalEEMod construction-source (unmitigated) emissions are presented in Appendix 3.1.

<sup>1</sup> 2022 Emissions include dust (PM<sub>10</sub> and PM<sub>2.5</sub>) from Blasting activities

### **3.5 OPERATIONAL EMISSIONS**

Operational activities associated with the Project would result in emissions of VOCs, NO<sub>x</sub>, SO<sub>x</sub>, CO, PM<sub>10</sub>, and PM<sub>2.5</sub>. Operational emissions are expected from the following primary sources:

- Area Source Emissions
- Energy Source Emissions
- Mobile Source Emissions
- On-Site Cargo Handling Equipment Emissions
- Stationary Source Emissions

#### 3.5.1 AREA SOURCE EMISSIONS

#### ARCHITECTURAL COATINGS

Over a period of time the buildings that are part of this Project would require maintenance and would therefore produce emissions resulting from the evaporation of solvents contained in paints, varnishes, primers, and other surface coatings. The emissions associated with architectural coatings were calculated using CalEEMod.

#### **CONSUMER PRODUCTS**

Consumer products include, but are not limited to detergents, cleaning compounds, polishes, personal care products, and lawn and garden products. Many of these products contain organic compounds which when released in the atmosphere can react to form ozone and other photochemically reactive pollutants. The emissions associated with use of consumer products were calculated based on defaults provided within CalEEMod.



#### LANDSCAPE MAINTENANCE EQUIPMENT

Landscape maintenance equipment would generate emissions from fuel combustion and evaporation of unburned fuel. Equipment in this category would include lawnmowers, shedders/grinders, blowers, trimmers, chain saws, and hedge trimmers used to maintain the landscaping of the Project. The emissions associated with landscape maintenance equipment were calculated based on assumptions provided in CalEEMod.

### **3.5.2** ENERGY SOURCE EMISSIONS

#### COMBUSTION EMISSIONS ASSOCIATED WITH NATURAL GAS AND ELECTRICITY

Electricity and natural gas are used by almost every project. Criteria pollutant emissions are emitted through the generation of electricity and consumption of natural gas. However, because electrical generating facilities for the Project area are located either outside the region (state) or offset through the use of pollution credits (RECLAIM) for generation within the SCAB, criteria pollutant emissions from offsite generation of electricity are generally excluded from the evaluation of significance and only natural gas use is considered. The emissions associated with natural gas use were calculated using CalEEMod.

### **3.5.3** MOBILE SOURCE EMISSIONS

The Project related operational air quality emissions derive primarily from vehicle trips generated by the Project, including employee trips to and from the site and truck trips associated with the proposed uses. Trip characteristics available from the *Muranaka Warehouse Project Traffic Impact Analysis* were utilized in this analysis (36). The Project is expected to generate a total of approximately 510 two-way vehicular trips per day (255 inbound and 255 outbound) (36).

#### APPROACH FOR ANALYSIS OF THE PROJECT

To determine emissions from passenger car vehicles, the CalEEMod defaults were utilized for trip length and trip purpose for the proposed industrial land uses. For the proposed industrial uses, it is important to note that although the *Muranaka Warehouse Traffic Impact Analysis* does not breakdown passenger cars by type, this analysis assumes that passenger cars include Light-Duty-Auto vehicles (LDA), Light-Duty-Trucks (LDT1<sup>4</sup> & LDT2<sup>5</sup>), Medium-Duty-Vehicles (MDV), and Motorcycles (MCY) vehicle types. To account for emissions generated by passenger cars, the following fleet mix was utilized in this analysis:

<sup>&</sup>lt;sup>5</sup> Vehicles under the LDT2 category have a GVWR of less than 6,000 lbs. and ETW between 3,751 lbs. and 5,750 lbs.



<sup>&</sup>lt;sup>4</sup> Vehicles under the LDT1 category have a gross vehicle weight rating (GVWR) of less than 6,000 lbs. and equivalent test weight (ETW) of less than or equal to 3,750 lbs.

Land Use	Vehicle Type	%
	LDA	57.60
	LDT1	6.03
High-Cube Fulfillment Center	LDT2	18.59
	MDV	15.19
	MCY	2.59

#### TABLE 3-6: PASSENGER CAR FLEET MIX

Note: The Project-specific passenger car fleet mix used in this analysis is based on a proportional split utilizing the default CalEEMod percentages assigned to LDA, LDT1, LDT2, and MDV vehicle types.

To determine emissions from trucks for the proposed industrial uses, the analysis incorporated the SCAQMD recommended truck trip length of 40 miles<sup>6</sup> and an assumption of 100% primary trips for the proposed industrial land uses. In order to be consistent with the *Muranaka Warehouse Traffic Impact Analysis*, trucks are broken down by truck type. The truck fleet mix is estimated by rationing the trip rates for each truck type based on information provided in the *Muranaka Warehouse Traffic Impact Analysis*. Heavy trucks are broken down by truck type (or axle type) and are categorized as either Light-Heavy-Duty Trucks (LHDT1<sup>7</sup> & LHDT2<sup>8</sup>)/2-axle, Medium-Heavy-Duty Trucks (MHDT)/3-axle, and HHDT/4+-axle. To account for emissions generated by trucks, the following fleet mix was utilized in this analysis:

# TABLE 3-7: TRUCK FLEET MIX

Land Use	Vehicle Type	%
	LHDT1	11.20
High-Cube Fulfillment Center	LHDT2	3.08
	MHDT	14.29
	HHDT	71.43

Note: Project-specific truck fleet mix is based on the number of trips generated by each truck type (LHDT1, LHDT2, MHDT, and HHDT) relative to the total number of truck trips.

#### FUGITIVE DUST RELATED TO VEHICULAR TRAVEL

Vehicles traveling on paved roads would be a source of fugitive emissions due to the generation of road dust inclusive of break and tire wear particulates. The emissions estimate for travel on paved roads were calculated using CalEEMod.

<sup>7</sup> Vehicles under the LHDT1 category have a GVWR of 8,501 to 10,000 lbs.



<sup>&</sup>lt;sup>6</sup> The average trip length for heavy trucks were based on the SCAQMD documents for the implementation of the Facility-Based Mobile Source Measures (FBMSMs) adopted in the 2016 AQMP. SCAQMD's "Preliminary Warehouse Emission Calculations" cites 39.9-mile trip length for heavy-heavy trucks (41). As a conservative measure, a trip length of 40 miles has been utilized for all trucks for the purpose of this analysis (39)

 $<sup>^{8}</sup>$  Vehicles under the LHDT2 category have a GVWR of 10,001 to 14,000 lbs.

# 3.5.4 ON-SITE CARGO HANDLING EQUIPMENT SOURCE EMISSIONS

It is common for industrial warehouse buildings to require cargo handling equipment to move empty containers and empty chassis to and from the various pieces of cargo handling equipment that receive and distribute containers. For this particular Project, on-site modeled operational equipment includes up to one (1) 200 horsepower (hp), compressed natural gas or gasolinepowered tractors/loaders/backhoes operating at 4 hours a day for 365 days of the year.

### **3.5.5** STATIONARY SOURCE EMISSIONS

Stationary area source emissions are typically generated by the consumption of natural gas for space and water heating devices and the use of consumer products. Stationary energy emissions would result from energy consumption associated with the proposed Project. However, the proposed Project may include the use of a fire pump. As such, for this particular Project, it is assumed that a single diesel-fueled fire pump will operate at 238 hp for 50 hours during the year.

#### 3.5.6 OPERATIONAL EMISSIONS SUMMARY

As previously stated, CalEEMod utilizes summer and winter EMFAC2017 emission factors in order to derive vehicle emissions associated with Project operational activities, which vary by season. The estimated operational-source emissions are summarized on Table 3-8. Detailed operation model outputs for the Project are presented in Appendix 3.2. As shown on Table 3-8, the Project's daily regional emissions from on-going operations will not exceed any of the thresholds of significance.

Source	Emissions (lbs/day)					
Source	VOC	NOx	со	SOx	PM10	PM <sub>2.5</sub>
	c.	Summer				
Area Source	5.51	8.60E-04	0.09	1.00E-05	3.40E-04	3.40E-04
Energy Source	0.01	0.13	0.11	7.80E-04	9.82E-03	9.82E-03
Mobile Source	1.83	15.13	20.21	0.12	7.16	2.08
On-Site Equipment Source	0.11	1.04	0.75	3.17E-03	0.04	0.03
Stationary Source	0.05	0.15	0.14	2.60E-04	8.04E-03	8.04E-03
Total Maximum Daily Emissions	7.52	16.45	21.30	0.12	7.22	2.13
SCAQMD Regional Threshold	55	55	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO

# TABLE 3-8: SUMMARY OF PEAK OPERATIONAL EMISSIONS (1 OF 2)



Course	Emissions (lbs/day)					
Source	voc	NOx	со	SOx	<b>PM</b> 10	PM2.5
		Winter				
Area Source	5.51	8.60E-04	0.09	1.00E-05	3.40E-04	3.40E-04
Energy Source	0.01	0.13	0.11	7.80E-04	9.82E-03	9.82E-03
Mobile Source	1.61	15.98	18.01	0.12	7.16	2.08
On-Site Equipment Source	0.11	1.04	0.75	3.17E-03	0.04	0.03
Stationary Source	0.05	0.15	0.14	2.60E-04	8.04E-03	8.04E-03
Total Maximum Daily Emissions	7.30	17.30	19.10	0.12	7.22	2.13
SCAQMD Regional Threshold	55	55	550	150	150	55
Threshold Exceeded?	NO	NO	NO	NO	NO	NO

#### TABLE 3-8: SUMMARY OF PEAK OPERATIONAL EMISSIONS (2 OF 2)

Source: CalEEMod operational-source emissions are presented in Appendix 3.2.

### **3.6 LOCALIZED SIGNIFICANCE**

#### BACKGROUND ON LST DEVELOPMENT

The analysis makes use of methodology included in the SCAQMD *Final Localized Significance Threshold Methodology* (LST Methodology). The SCAQMD has established that impacts to air quality are significant if there is a potential to contribute or cause localized exceedances of the federal and/or state ambient air quality standards (NAAQS/CAAQS). Collectively, these are referred to as Localized Significance Thresholds (LSTs).

The SCAQMD established LSTs in response to the SCAQMD Governing Board's Environmental Justice Initiative I-4<sup>9</sup>. LSTs represent the maximum emissions from a project that would not cause or contribute to an exceedance of the most stringent applicable federal or state ambient air quality standard at the nearest residence or sensitive receptor. The SCAQMD states that lead agencies can use the LSTs as another indicator of significance in its air quality impact analyses.

LSTs were developed in response to environmental justice and health concerns raised by the public regarding exposure of individuals to criteria pollutants in local communities. To address the issue of localized significance, the SCAQMD adopted LSTs that show whether a project would cause or contribute to localized air quality impacts and thereby cause or contribute to potential localized adverse health effects. The analysis makes use of methodology included in the *LST Methodology* (37).

<sup>&</sup>lt;sup>9</sup> The purpose of SCAQMD's Environmental Justice program is to ensure that everyone has the right to equal protection from air pollution and fair access to the decision-making process that works to improve the quality of air within their communities. Further, the SCAQMD defines Environmental Justice as "...equitable environmental policymaking and enforcement to protect the health of all residents, regardless of age, culture, ethnicity, gender, race, socioeconomic status, or geographic location, from the health effects of air pollution."



### APPLICABILITY OF LSTS FOR THE PROJECT

For this Project, the appropriate SRA for the LST analysis is the SCAQMD Metropolitan Riverside County 1 (SRA 23). LSTs apply to CO, NO<sub>2</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub>. The SCAQMD produced look-up tables for projects less than or equal to 5 acres in size.

In order to determine the appropriate methodology for determining localized impacts that could occur as a result of Project-related construction, the following process is undertaken:

- Identify the maximum daily on-site emissions that would occur during construction activity:
  - The maximum daily on-site emissions could be based on information provided by the Project Applicant; or
  - The SCAQMD's Fact Sheet for Applying CalEEMod to Localized Significance Thresholds and CalEEMod User's Guide Appendix A: Calculation Details for CalEEMod can be used to determine the maximum site acreage that is actively disturbed based on the construction equipment fleet and equipment hours as estimated in CalEEMod (38) (30).
- If the total acreage disturbed is less than or equal to 5 acres per day, then the SCAQMD's screening look-up tables are utilized to determine if a Project has the potential to result in a significant impact. The look-up tables establish a maximum daily emissions threshold in lbs/day that can be compared to CalEEMod outputs.
- If the total acreage disturbed is greater than 5 acres per day, then LST impacts may still be conservatively evaluated using the LST look-up tables for a 5-acre disturbance area. Use of the 5acre disturbance area thresholds can be used to show that even if the daily emissions from all construction activity were emitted within a 5-acre area, and therefore concentrated over a smaller area which would result in greater site adjacent concentrations, the impacts would still be less than significant if the applicable 5-acre thresholds are utilized.
- The LST Methodology presents mass emission rates for each SRA, project sizes of 1, 2, and 5 acres, and nearest receptor distances of 25, 50, 100, 200, and 500 meters. For project sizes between the values given, or with receptors at distances between the given receptors, the methodology uses linear interpolation to determine the thresholds.

#### **EMISSIONS CONSIDERED**

Based on SCAQMD's *LST Methodology*, emissions for concern during construction activities are on-site NO<sub>X</sub>, CO, PM<sub>2.5</sub>, and PM<sub>10</sub>. The *LST Methodology* clearly states that "off-site mobile emissions from the Project should not be included in the emissions compared to LSTs (39)." As such, for purposes of the construction LST analysis, only emissions included in the CalEEMod "on-site" emissions outputs were considered.

#### MAXIMUM DAILY DISTURBED-ACREAGE

For purposes of analysis, it is assumed that a maximum of 5 acres per day can be actively disturbed during construction of the site. In CalEEMod, the Total Acres Graded (TAG) field represents the cumulative distance traversed on the property by the grading equipment. In order to properly grade a piece of land, multiple passes with grading equipment may be required. So even though the lot size is a fixed number of acres, the TAG could be an order of magnitude higher than the footprint of the lot (30). Total Acres Graded (TAG) is a function of the maximum



acreage disturbed per day times the number of days of the subphase of construction. As such, the TAG field in CalEEMod has been revised to 50 acres (5 acres per day x 10 days) for site preparation and 150 acres (5 acres per day x 30 days) for grading.<sup>10</sup>

#### RECEPTORS

As previously stated, LSTs represent the maximum emissions from a project that would not cause or contribute to an exceedance of the most stringent applicable NAAQS and CAAQS at the nearest residence or sensitive receptor. Receptor locations are off-site locations where individuals may be exposed to emissions from Project activities.

Some people are especially sensitive to air pollution and are given special consideration when evaluating air quality impacts from projects. These groups of people include children, the elderly, and individuals with pre-existing respiratory or cardiovascular illness. Structures that house these persons or places where they gather are defined as "sensitive receptors". These structures typically include uses such as residences, hotels, and hospitals where an individual can remain for 24 hours. Consistent with the LST Methodology, the nearest land use where an individual could remain for 24 hours to the Project site has been used to determine construction and operational air quality impacts for emissions of PM<sub>10</sub> and PM<sub>2.5</sub>, since PM<sub>10</sub> and PM<sub>2.5</sub> thresholds are based on a 24-hour averaging time.

LSTs apply, even for non-sensitive land uses, consistent with *LST Methodology* and SCAQMD guidance. Per the *LST Methodology*, commercial and industrial facilities are not included in the definition of sensitive receptor because employees and patrons do not typically remain onsite for a full 24 hours but are typically onsite for 8 hours or less. However, *LST Methodology* explicitly states that "*LSTs based on shorter averaging periods, such as the NO*<sub>2</sub> and *CO LSTs, could also be applied to receptors such as industrial or commercial facilities since it is reasonable to assume that a worker at these sites could be present for periods of one to eight hours (39)."* Therefore, any adjacent land use where an individual could remain for 1 or 8-hours, that is located at a closer distance to the Project site than the receptor used for PM<sub>10</sub> and PM<sub>2.5</sub> analysis, must be considered to determine construction and operational LST air impacts for emissions of NO<sub>2</sub> and CO since these pollutants have an averaging time of 1 and 8-hours.

#### PROJECT-RELATED RECEPTORS

Receptors in the Project study area are described below and shown on Exhibit 3-A. Localized air quality impacts were evaluated at sensitive receptor land uses nearest the Project site. All distances are measured from the Project site boundary to the outdoor living areas (e.g., backyards) or at the building façade, whichever is closer to the Project site. The selection of receptor locations is based on Federal Highway Administration (FHWA) guidelines and is consistent with additional guidance provided by Caltrans and the Federal Transit Administration (FTA).

<sup>&</sup>lt;sup>10</sup> CalEEMod does not provide a "Total Acres Graded" field for Demolition, Building Construction, Paving, or Architectural Coating activities.



- R1: Location R1 represents the existing residence at 22980 Peregrine Way, approximately 1,681 feet southeast of the Project site. R1 is placed in the private outdoor living areas (backyard) facing the Project site.
- R2: Location R2 represents the existing residence at 22722 Redwood Drive, approximately 1,916 feet south of the Project site. R2 is placed in the private outdoor living areas (backyard) facing the Project site.
- R3: Location R3 represents the existing residence at 22608 Redwood Drive, approximately 2,066 feet south of the Project site. R3 is placed in the private outdoor living areas (backyard) facing the Project site.
- R4: Location R4 represents the existing residence at 18088 Day Street, approximately 2,593 feet southwest of the Project site. R4 is placed in the private outdoor living areas (backyard) facing the Project site.
- R5: Location R5 represents the existing residence at 17771 Day Street, approximately 2,696 feet west of the Project site. R5 is placed in the private outdoor living areas (backyard) facing the Project site.
- R6: Location R6 represents the DSC Logistics facility at 17789 Harvill Avenue, approximately 160 feet east of the Project site.

The SCAQMD recommends that the nearest sensitive receptor be considered when determining the Project's potential to cause an individual a cumulatively significant impact. The nearest land use where an individual could remain for 24 hours to the Project site has been used to determine localized construction and operational air quality impacts for emissions of PM<sub>10</sub> and PM<sub>2.5</sub> (since PM<sub>10</sub> and PM<sub>2.5</sub> thresholds are based on a 24-hour averaging time). The nearest receptor used for evaluation of localized impacts of PM<sub>10</sub> and PM<sub>2.5</sub> is the existing residence at 22980 Peregrine Way, represented by R1, approximately 1,681 feet (512 meters) southeast of the Project site.

As previously stated, and consistent with *LST Methodology*, the nearest industrial/commercial use to the Project site is used to determine construction and operational LST air impacts for emissions of NO<sub>X</sub> and CO as the averaging periods for these pollutants are shorter (8 hours or less) and it is reasonable to assumed that an individual could be present at these sites for periods of one to 8 hours. The nearest receptor used for evaluation of localized impacts of NO<sub>X</sub> and CO is the DSC Logistics facility at 17789 Harvill Avenue, approximately 160 feet (49 meters) east of the Project site.





#### **EXHIBIT 3-A: RECEPTOR LOCATIONS**

Distance from receptor to Project site boundary (in feet)



# 3.7 CONSTRUCTION-SOURCE EMISSIONS LST ANALYSIS

### 3.7.1 LOCALIZED THRESHOLDS FOR CONSTRUCTION ACTIVITY

Although the total acreage disturbed is more than 5 acres per day for construction activities, the *LST Methodology* provides look-up tables for sites with an area with daily disturbance of 5 acres or less. For projects that exceed 5 acres, the 5-acre LST look-up tables can be used as a screening tool to determine which pollutants require additional detailed analysis. This approach is conservative as it assumes that all on-site emissions associated with the Project would occur within a concentrated 5-acre area. This screening method would therefore over-predict potential localized impacts, because by assuming that on-site construction activities are occurring over a smaller area, the resulting concentrations of air pollutants are more highly concentrated once they reach the smaller site boundary than they would be for activities if they were spread out over a larger surface area. On a larger site, the same amount of air pollutants generated would disperse over a larger surface area and would result in a lower concentration are used as a screening tool to determine if further detailed analysis is required. The thresholds used in for the construction-source LST analysis are presented below in Table 3-9.

Pollutant	Construction Localized Thresholds		
NOx	301 lbs/day		
со	2,154 lbs/day		
PM10	207 lbs/day		
PM <sub>2.5</sub>	105 lbs/day		

TABLE 3-9: MAXIMUM DAILY LOCALIZED CONSTRUCTION EMISSIONS THRESHOLDS

Source: Localized Thresholds presented in this table are based on the SCAQMD Final LST Methodology, July 2008

#### 3.7.2 CONSTRUCTION-SOURCE LOCALIZED EMISSIONS

#### IMPACTS WITHOUT MITIGATION

Table 3-10 identifies the localized impacts at the nearest receptor location in the vicinity of the Project. Without mitigation, localized construction emissions would not exceed the applicable SCAQMD LSTs for emissions of any criterial pollutant. Outputs from the model runs for unmitigated construction LSTs are provided in Appendix 3.1.



		Emissions (lbs/day)				
On-Site Emissions	NOx	со	PM10	PM2.5		
	Site Preparation					
Maximum Daily Emissions	50.35	19.98	11.27	6.08		
SCAQMD Localized Threshold	301	2,154	207	105		
Threshold Exceeded?	NO	NO	NO	NO		
Gradi	ing (including Blasting)					
Maximum Daily Emissions	49.26	36.22	47.03	11.82		
SCAQMD Localized Threshold	301	2,154	207	105		
Threshold Exceeded?	NO	NO	NO	NO		
Bu	uilding Construction					
Maximum Daily Emissions	16.77	17.44	0.86	0.81		
SCAQMD Localized Threshold	301	2,154	207	105		
Threshold Exceeded?	NO	NO	NO	NO		
	Paving					
Maximum Daily Emissions	10.19	14.58	0.51	0.47		
SCAQMD Localized Threshold	301	2,154	207	105		
Threshold Exceeded?	NO	NO	NO	NO		
Ar	chitectural Coating					
Maximum Daily Emissions	1.74	2.41	0.09	0.09		
SCAQMD Localized Threshold	301	2,154	207	105		
Threshold Exceeded?	NO	NO	NO	NO		

#### TABLE 3-10: LOCALIZED CONSTRUCTION-SOURCE EMISSIONS – WITHOUT MITIGATION

Source: CalEEMod unmitigated localized construction-source emissions are presented in Appendix 3.1.

# 3.8 OPERATIONAL-SOURCE EMISSIONS LST ANALYSIS

As previously stated, the Project is located on an approximately 15.2-acre parcel. As noted previously, the *LST Methodology* provides look-up tables for sites with an area with daily disturbance of 5 acres or less. For projects that exceed 5 acres, the 5-acre LST look-up tables can be used as a screening tool to determine whether pollutants require additional detailed analysis. This approach is conservative as it assumes that all on-site emissions associated with the project would occur within a concentrated 5-acre area. This screening method would therefore over-predict potential localized impacts, because by assuming that on-site operational activities are occurring over a smaller area, the resulting concentrations of air pollutants are more highly concentrated once they reach the smaller site boundary than they would be for activities if they were spread out over a larger surface area. On a larger site, the same amount of air pollutants generated would disperse over a larger surface area and would result in a lower concentration



once emissions reach the project-site boundary. As such, LSTs for a 5-acre site during operations are used as a screening tool to determine if further detailed analysis is required.

The LST analysis generally includes on-site sources (area, energy, mobile, on-site cargo handling equipment, and stationary equipment – are previously discussed in Section 3.5 of this report). However, it should be noted that the CalEEMod outputs do not separate on-site and off-site emissions from mobile sources. As such, in an effort to establish a maximum potential impact scenario for analytic purposes, the emissions shown on Table 3-12 represent all on-site Projectrelated stationary (area) sources and 5% of the Project-related mobile sources. Considering that the trip length used in CalEEMod for the Project is approximately 16.6 miles for passenger cars and 40.0 miles for all trucks, 5% of this total would represent an on-site travel distance of approximately 0.8 mile/4,382 feet for passenger cars and 2 miles/10,560 feet for trucks. It should be noted that the longest on-site distance is roughly 0.6 mile for both trucks and passenger cars. As such, the 5% assumption is conservative and would tend to overstate the actual impact because it is not likely that a passenger car would drive 0.8 mile on the site or that a truck would drive 2 miles on the site. Modeling based on these assumptions demonstrates that even within broad encompassing parameters, Project operational-source emissions would not exceed applicable LSTs.

# 3.8.1 LOCALIZED THRESHOLDS FOR OPERATIONAL ACTIVITY

As previously stated, LSTs for a 5-acre site during operations are used as a screening tool to determine if further detailed analysis is required.

Pollutant	Operational Localized Thresholds		
NOx	301 lbs/day		
СО	2,154 lbs/day		
PM <sub>10</sub>	50 lbs/day		
PM <sub>2.5</sub>	26 lbs/day		

#### TABLE 3-11: MAXIMUM DAILY LOCAL IZED OPERATIONAL EMISSIONS THRESHOLDS

Source: Localized Thresholds presented in this table are based on the SCAQMD Final LST Methodology, July 2008

#### 3.8.2 OPERATIONAL-SOURCE LOCALIZED EMISSIONS

#### **IMPACTS WITHOUT MITIGATION**

As shown on Table 3-12 operational emissions would not exceed the LST thresholds for the nearest sensitive receptor. Therefore, the Project would have a less than significant localized impact during operational activity.



On-Site Emissions	Emissions (lbs/day)			
	NOx	со	<b>PM</b> 10	PM2.5
Maximum Daily Emissions	2.12	2.10	0.41	0.16
SCAQMD Localized Threshold	301	2,154	50	26
Threshold Exceeded?	NO	NO	NO	NO

#### TABLE 3-12: LOCALIZED SIGNIFICANCE SUMMARY OF OPERATIONS – WITHOUT MITIGATION

Source: CalEEMod localized operational-source emissions are presented in Appendix 3.2.

# 3.9 CO "HOT SPOT" ANALYSIS

As discussed below, the Project would not result in potentially adverse CO concentrations or "hot spots." Further, detailed modeling of Project-specific CO "hot spots" is not needed to reach this conclusion. An adverse CO concentration, known as a "hot spot", would occur if an exceedance of the state one-hour standard of 20 ppm or the eight-hour standard of 9 ppm were to occur.

It has long been recognized that CO hotspots are caused by vehicular emissions, primarily when idling at congested intersections. In response, vehicle emissions standards have become increasingly stringent in the last twenty years. Currently, the allowable CO emissions standard in California is a maximum of 3.4 grams/mile for passenger cars (there are requirements for certain vehicles that are more stringent). With the turnover of older vehicles, introduction of cleaner fuels, and implementation of increasingly sophisticated and efficient emissions control technologies, CO concentration in the SCAB is now designated as attainment.

To establish a more accurate record of baseline CO concentrations affecting the SCAB, a CO "hot spot" analysis was conducted in 2003 for four busy intersections in Los Angeles at the peak morning and afternoon time periods. This "hot spot" analysis did not predict any violation of CO standards, as shown on Table 3-13.

Intersection Location	CO Concentrations (ppm)				
intersection Location	Morning 1-hour	Afternoon 1-hour	8-hour		
Wilshire Boulevard/Veteran Avenue	4.6	3.5	4.2		
Sunset Boulevard/Highland Avenue	4	4.5	3.9		
La Cienega Boulevard/Century Boulevard	3.7	3.1	5.8		
Long Beach Boulevard/Imperial Highway	3	3.1	9.3		

#### TABLE 3-13: CO MODEL RESULTS

Notes: Federal 1-hour standard is 35 ppm, and the deferral 8-hour standard is 9.0 ppm.

Based on the SCAQMD's 2003 AQMP and the *1992 Federal Attainment Plan for Carbon Monoxide* (*1992 CO Plan*), peak CO concentrations in the SCAB were a result of unusual meteorological and topographical conditions and not a result of traffic volumes and congestion at a particular intersection. As evidence of this, for example, 9.3 ppm 8-hour CO concentration measured at the Long Beach Boulevard and Imperial Highway intersection (highest CO generating intersection



within the "hot spot" analysis), only 0.7 ppm was attributable to the traffic volumes and congestion at this intersection; the remaining 8.6 ppm were due to the ambient air measurements at the time the 2003 AQMP was prepared (40). In contrast, an adverse CO concentration, known as a "hot spot", would occur if an exceedance of the state one-hour standard of 20 parts per million (ppm) or the eight-hour standard of 9 ppm were to occur.

The ambient 1-hr and 8-hr CO concentration within the Project study area is estimated to be 1.5 ppm and 1.2 ppm, respectively (data from Metropolitan Riverside County 1 monitoring station for 2019). Therefore, even if the traffic volumes for the proposed Project were double or even triple of the traffic volumes generated at the Long Beach Blvd. and Imperial Hwy. intersection, coupled with the on-going improvements in ambient air quality, the Project would not be capable of resulting in a CO "hot spot" at any study area intersections.

Similar considerations are also employed by other Air Districts when evaluating potential CO concentration impacts. More specifically, the Bay Area Air Quality Management District (BAAQMD) concludes that under existing and future vehicle emission rates, a given project would have to increase traffic volumes at a single intersection by more than 44,000 vehicles per hour (vph)—or 24,000 vph where vertical and/or horizontal air does not mix—in order to generate a significant CO impact (41). Traffic volumes generating the CO concentrations for the "hot spot" analysis is shown on Table 3-14. The busiest intersection evaluated was that at Wilshire Boulevard and Veteran Avenue, which has a daily traffic volume of approximately 100,000 vph and AM/PM traffic volumes of 8,062 vph and 7,719 vph respectively (40). The *2003 AQMP* estimated that the 1-hour concentration for this intersection was 4.6 ppm; this indicates that, should the daily traffic volume increase four times to 400,000 vehicles per day, CO concentrations (4.6 ppm x 4= 18.4 ppm) would still not likely exceed the most stringent 1-hour CO standard (20.0 ppm)<sup>11</sup>.

	Peak Traffic Volumes (vph)				
Intersection Location	Eastbound (AM/PM)	Westbound (AM/PM)	Southbound (AM/PM)	Northbound (AM/PM)	Total (AM/PM)
Wilshire Boulevard/Veteran Avenue	4,954/2,069	1,830/3,317	721/1,400	560/933	8,062/7,719
Sunset Boulevard/Highland Avenue	1,417/1,764	1,342/1,540	2,304/1,832	1,551/2,238	6,614/5,374
La Cienega Boulevard/Century Boulevard	2,540/2,243	1,890/2,728	1,384/2,029	821/1,674	6,634/8,674
Long Beach Boulevard/Imperial Highway	1,217/2,020	1,760/1,400	479/944	756/1,150	4,212/5,514

# TABLE 3-14: TRAFFIC VOLUMES

As shown on Table 3-15, the highest trips on a segment of road for the proposed Project during AM and PM traffic is 1,264 vph and 1,222 vph, respectively, on Harvill Avenue and Harley Knox Boulevard (36). As such, Project-related traffic volumes are less than the traffic volumes identified in the 2003 AQMP. The Project considered herein would not produce the volume of



 $<sup>^{11}</sup>$  Based on the ratio of the CO standard (20.0 ppm) and the modeled value (4.6 ppm)

traffic required to generate a CO "hot spot" either in the context of the 2003 Los Angeles hot spot study or based on representative BAAQMD CO threshold considerations. Therefore, CO "hot spots" are not an environmental impact of concern for the Project. Localized air quality impacts related to mobile-source emissions would therefore be less than significant.

Intersection Location	Peak Traffic Volumes (vph)				
	Eastbound (AM/PM)	Westbound (AM/PM)	Southbound (AM/PM)	Northbound (AM/PM)	Total (AM/PM)
Decker Road/Harley Knox Boulevard	22/56	12/6	37/114	194/87	265/263
Driveway/Harley Knox Boulevard	3/11	0/0	61/306	215/118	279/435
Harvill Avenue/Harley Knox Boulevard	390/636	27/34	62/299	785/253	1,264/1,222

#### TABLE 3-15: OPENING YEAR TRAFFIC VOLUMES

Source: Muranaka Warehouse Project Traffic Impact Analysis

WB = Westbound

# 3.10 AQMP

The Project site is located within the SCAB, which is characterized by relatively poor air quality. The SCAQMD has jurisdiction over an approximately 10,743 square-mile area consisting of the four-county Basin and the Los Angeles County and Riverside County portions of what use to be referred to as the Southeast Desert Air Basin. In these areas, the SCAQMD is principally responsible for air pollution control, and works directly with the SCAG, county transportation commissions, local governments, as well as state and federal agencies to reduce emissions from stationary, mobile, and indirect sources to meet state and federal ambient air quality standards.

Currently, these state and federal air quality standards are exceeded in most parts of the SCAB. In response, the SCAQMD has adopted a series of AQMPs to meet the state and federal ambient air quality standards. AQMPs are updated regularly in order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy.

In March 2017, the SCAQMD released the *Final 2016 AQMP* (*2016 AQMP*). The *2016 AQMP* continues to evaluate current integrated strategies and control measures to meet the NAAQS, as well as explore new and innovative methods to reach its goals. Some of these approaches include utilizing incentive programs, recognizing existing co-benefit programs from other sectors, and developing a strategy with fair-share reductions at the federal, state, and local levels (42). Similar to the 2012 AQMP, the *2016 AQMP* incorporates scientific and technological information and planning assumptions, including the *2016-2040 Regional Transportation Plan/Sustainable Communities Strategy* (*2016-2040 RTP/SCS*), a planning document that supports the integration of land use and transportation to help the region meet the federal CAA requirements (17). The Project's consistency with the AQMP will be determined using the *2016 AQMP* as discussed below.



Criteria for determining consistency with the AQMP are defined in Chapter 12, Section 12.2 and Section 12.3 of the *1993 CEQA Handbook* (43). These indicators are discussed below:

# 3.10.1 CONSISTENCY CRITERION NO. 1

The proposed Project will not result in an increase in the frequency or severity of existing air quality violations or cause or contribute to new violations or delay the timely attainment of air quality standards or the interim emissions reductions specified in the AQMP.

The violations that Consistency Criterion No. 1 refer to are the CAAQS and NAAQS. CAAQS and NAAQS violations would occur if regional or localized significance thresholds were exceeded.

# Construction Impacts – Consistency Criterion 1

Consistency Criterion No. 1 refers to violations of the CAAQS and NAAQS. CAAQS and NAAQS violations would occur if localized or regional significance thresholds were exceeded. As evaluated, the Project's localized and regional construction-source emissions would not exceed applicable regional significance threshold and LST thresholds. As such, a less than significant impact is expected.

# **Operational Impacts – Consistency Criterion 1**

As evaluated, the Project's localized and regional operation-source emissions would not exceed applicable regional significance threshold and LST thresholds. As such, a less than significant impact is expected.

On the basis of the preceding discussion, the Project is determined to be inconsistent with the first criterion.

# **3.10.2** CONSISTENCY CRITERION NO. 2

# The Project will not exceed the assumptions in the AQMP based on the years of Project buildout phase.

The 2016 AQMP demonstrates that the applicable ambient air quality standards can be achieved within the timeframes required under federal law. Growth projections from local general plans adopted by cities in the district are provided to the SCAG, which develops regional growth forecasts, which are then used to develop future air quality forecasts for the AQMP. Development consistent with the growth projections in County of Riverside General Plan is considered to be consistent with the AQMP.

# Construction Impacts – Consistency Criterion 2

Peak day emissions generated by construction activities are largely independent of land use assignments, but rather are a function of development scope and maximum area of disturbance. Irrespective of the site's land use designation, development of the site to its maximum potential would likely occur, with disturbance of the entire site occurring during construction activities. As such, when considering that no emissions thresholds will be exceeded, a less than significant impact would result.



# **Operational Impacts – Consistency Criterion 2**

The Project site is located within an unincorporated portion of the County of Riverside. As per the General Plan, the unincorporated portions of the County are divided into 19 area plans. These area plans provide more detailed land use and policy direction regarding local issues such as land use, circulation, open space, and other topical areas (44). Per the General Plan, the Project site is located within the Mead Valley Area Plan and is designated for both Light Industrial (northern, southern, and eastern portions of the site) and Business Park (western portion) uses. The Light Industrial land use designation allows for a wide variety of industrial and related uses, including assembly and light manufacturing, repair and other service facilities, warehousing, distribution centers, and supporting retail uses. The Business Park land use designation allows for employee-intensive uses, including research and development, technology centers, corporate and support office uses, clean industry and supporting retail uses (44).

It should also be noted that the Project site is located within the Industrial Park and Manufacturing-Medium zoning designated areas. As described by the County's Municipal Code Section 17.96.010, the Industrial Park zone allows a variety of uses that include: industrial and manufacturing uses, service and commercial uses, office uses, transportation related industries, engineering and scientific uses, warehousing and distribution, and other similar uses (45). Municipal Code Section 17.104.010 describes that the Manufacturing-Medium zone is to promote and attract industrial and manufacturing activities which will provide jobs to local residents and strengthen the County's economic base; provide the necessary improvements to support industrial growth; insure the new industry is compatible with uses on adjacent lands, and protect industrial areas from encroachment by incompatible uses that may jeopardize industry (45).

As previously stated, the Project proposes to construct a new 239,308 sf high-cube fulfilment center building. As such, the Project's proposed uses are generally consistent with the site's land use and zoning designations.

On the basis of the preceding discussion, the Project is determined to be consistent with the second criterion.

# AQMP CONSISTENCY CONCLUSION

The Project would not result in or cause NAAQS or CAAQS violations. Additionally, the proposed Project is consistent with the land use and growth intensities reflected in the adopted General Plan. Furthermore, the Project would not exceed any applicable regional or local thresholds. As such, the Project is therefore considered to be consistent with the AQMP.

# **3.11 TOXIC AIR CONTAMINANTS**

# **CONSTRUCTION ACTIVITY**

During short-term construction activity, the Project will also result in some diesel particulate matter (DPM) which is a listed carcinogen and toxic air contaminant (TAC) in the State of California. The 2015 Office of Environmental Health Hazard Assessment (OEHHA) revised risk

assessment guidelines suggest that construction projects as short as 2-6 months may warrant evaluation. Notwithstanding, based on Urban Crossroad's professional opinion and experience in preparing health risk assessments for development projects, given the distance of the Project from surrounding sensitive receptors, the dominant wind patterns blowing to the northwest away for receptors, and the annual PM<sub>2.5</sub> emissions from equipment during each year of construction, any DPM generated from construction activity would result in less than significant ground level concentrations of DPM and not result in a significant health risks and no further evaluation is required.

Furthermore, many air districts throughout the state, including the SCAQMD, are currently evaluating the applicability of age sensitivity factors and have not established CEQA guidance. More specifically in their response to comments received on SCAQMD New Source Review rule, the SCAQMD explicitly states that:

"The Proposed Amended Rules are separate from the CEQA significance thresholds. The SCAQMD staff is currently evaluating how to implement the Revised OEHHA Guidelines under CEQA. The SCAQMD staff will evaluate a variety of options on how to evaluate health risks under the Revised OEHHA Guidelines under CEQA. The SCAQMD staff will conduct public workshops to gather input before bringing recommendations to the Governing Board. In the interim, staff will continue to use the previous guidelines for CEQA determinations."

# OPERATIONAL

Based on the results of the Muranaka Warehouse Mobile Source Health Risk Assessment (46), emissions generated from the Project during long-term operation will not exceed SCAQMD significance thresholds for cancer and non-cancer health risks. As such, a less than significant impact is expected.

# **3.12 POTENTIAL IMPACTS TO SENSITIVE RECEPTORS**

The potential impact of Project-generated air pollutant emissions at sensitive receptors has also been considered. Results of the LST analysis indicate that the Project would not exceed the SCAQMD localized significance thresholds during construction. Therefore, sensitive receptors would not be exposed to substantial pollutant concentrations during Project construction.

Additionally, the Project would not exceed the SCAQMD localized significance thresholds during operational activity. Further Project traffic would not create or result in a CO "hotspot." Therefore, sensitive receptors would not be exposed to substantial pollutant concentrations as the result of Project operations.

# 3.12.1 FRIANT RANCH CASE

In December 2018, in the case of *Sierra Club v. County of Fresno* (2018) 6 Cal.5<sup>th</sup> 502, the California Supreme Court held that an Environmental Impact Report's (EIR) air quality analysis must meaningfully connect the identified air quality impacts to the human health consequences of those impacts, or meaningfully explain why that analysis cannot be provided.



As discussed in briefs filed in the Friant Ranch case, correlating a project's criteria air pollutant emissions to specific health impacts is challenging. Health effects caused by criteria pollutant emissions are dependent on a variety of interrelated variables. In particular, ozone precursors (VOCs and NOx) affect air quality on a regional scale. The SCAQMD, which has among the most sophisticated air quality modeling and health impact evaluation capability of any of the air districts in the State, and thus it is uniquely situated to express an opinion on how lead agencies should correlate air quality impacts with specific health outcomes noted that it may be "difficult to quantify health impacts for criteria pollutants." (47).

As noted in the *Brief*, the San Joaquin Valley Unified Air Pollution Control District (SJVUAPCD) ties the difficulty of correlating the emission of criteria pollutants to health impacts to how ozone and particulate matter are formed, stating that "[b]ecause of the complexity of ozone formation, a specific tonnage amount of NO<sub>X</sub> or VOCs emitted in a particular area does not equate to a particular concentration of ozone in that area." (48). Similarly, the tonnage of PM "emitted does not always equate to the local PM concentration because it can be transported long distances by wind," and "[s]econdary PM, like ozone, is formed via complex chemical reactions in the atmosphere between precursor chemicals such as sulfur dioxides (SO<sub>X</sub>) and NO<sub>X</sub>," meaning that "the tonnage of PM-forming precursor emissions in an area does not necessarily result in an equivalent concentration of secondary PM in that area." (48). The disconnect between the amount of precursor pollutants and the concentration of ozone or PM formed makes it difficult to determine potential health impacts, which are related to the concentration of ozone and PM experienced by the receptor rather than levels of NO<sub>X</sub>, SO<sub>X</sub>, and VOCs produced by a source.

Health effects related to ozone are therefore the product of emissions generated by numerous sources throughout a region. SCAQMD's *Brief of Amicus Curiae* (*Brief,* see Appendix 3.4) goes on to state that "it takes a large amount of additional precursor emissions (NOx and VOCs) to cause a modeled increase in ambient ozone levels over an entire region." The SCAQMD states that based on their own modeling in the SCAQMD's 2012 AQMP, a reduction of "NO<sub>x</sub> by 432 tons per day (157,680 tons/year) and reducing VOC by 187 tons per day (68,255 tons/year) would reduce ozone levels at the SCAQMD's monitor site with the highest levels by only 9 parts per billion.". As such, the SCAQMD concludes that it is not currently possible "to accurately quantify ozone-related health impacts caused by NO<sub>x</sub> or VOC emissions from relatively small projects." (49).

Most local agencies, including the County of Riverside, lack the data to do their own assessment of potential health impacts from criteria air pollutant emissions, as would be required to establish customized, locally-specific thresholds of significance based on potential health impacts from an individual development project. The use of national or "generic" data to fill the gap of missing local data would not yield accurate results because such data does not capture local air patterns, local background conditions, or local population characteristics, all of which play a role in how a population experiences air pollution. Because it is impracticable to accurately isolate the exact cause of a human disease (for example, the role a particular air pollutant plays compared to the role of other allergens and genetics in cause asthma), existing scientific tools cannot accurately estimate health impacts of the Project's air emissions without undue speculation. Instead, readers are directed to the Project's air quality impact analysis above, which provides extensive



information concerning the quantifiable and non-quantifiable health risks related to the Project's construction and long-term operation.

Notwithstanding, this AQIA does evaluate the proposed Project's localized impact to air quality for emissions of CO, NO<sub>X</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub> by comparing the proposed project's on-site emissions to the SCAQMD's applicable LST thresholds. The LST analysis above determined that the Project would not result in emissions exceeding SCAQMD's LSTs. Therefore, the proposed Project would not be expected to exceed the most stringent applicable federal or state ambient air quality standards for emissions of CO, NO<sub>X</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub>.

As the Project's emissions would comply with federal, state, and local air quality standards, the proposed Project's emissions are not sufficiently high enough to use a regional modeling program to correlate health effects on a basin-wide level and would not provide a reliable indicator of health effects if modeled.

# **3.13 ODORS**

The potential for the Project to generate objectionable odors has also been considered. Land uses generally associated with odor complaints include:

- Agricultural uses (livestock and farming)
- Wastewater treatment plants
- Food processing plants
- Chemical plants
- Composting operations
- Refineries
- Landfills
- Dairies
- Fiberglass molding facilities

The Project does not contain land uses typically associated with emitting objectionable odors. Potential odor sources associated with the proposed Project may result from construction equipment exhaust and the application of asphalt and architectural coatings during construction activities and the temporary storage of typical solid waste (refuse) associated with the proposed Project's (long-term operational) uses. Standard construction requirements would minimize odor impacts from construction. The construction odor emissions would be temporary, short-term, and intermittent in nature and would cease upon completion of the respective phase of construction and is thus considered less than significant. It is expected that Project-generated refuse would be stored in covered containers and removed at regular intervals in compliance with the solid waste regulations. The proposed Project would also be required to comply with SCAQMD Rule 402 to prevent occurrences of public nuisances. Therefore, odors and other emissions (such as those leading to odors) associated with construction and operations activities of the proposed Project would be less than significant and no mitigation is required (50).



# 3.14 CUMULATIVE IMPACTS

As previously shown in Table 2-3, the CAAQS designate the Project site as nonattainment for  $O_3$  PM<sub>10</sub>, and PM<sub>2.5</sub> while the NAAQS designates the Project site as nonattainment for  $O_3$  and PM<sub>2.5</sub>.

The SCAQMD has published a report on how to address cumulative impacts from air pollution: *White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution* (51). In this report the SCAQMD clearly states (Page D-3):

"...the SCAQMD uses the same significance thresholds for project specific and cumulative impacts for all environmental topics analyzed in an Environmental Assessment or EIR. The only case where the significance thresholds for project specific and cumulative impacts differ is the Hazard Index (HI) significance threshold for TAC emissions. The project specific (project increment) significance threshold is HI > 1.0 while the cumulative (facility-wide) is HI > 3.0. It should be noted that the HI is only one of three TAC emission significance thresholds considered (when applicable) in a CEQA analysis. The other two are the maximum individual cancer risk (MICR) and the cancer burden, both of which use the same significance thresholds (MICR of 10 in 1 million and cancer burden of 0.5) for project specific and cumulative impacts.

Projects that exceed the project-specific significance thresholds are considered by the SCAQMD to be cumulatively considerable. This is the reason project-specific and cumulative significance thresholds are the same. Conversely, projects that do not exceed the project-specific thresholds are generally not considered to be cumulatively significant."

Therefore, this analysis assumes that individual projects that do not generate operational or construction emissions that exceed the SCAQMD's recommended daily thresholds for project-specific impacts would also not cause a cumulatively considerable increase in emissions for those pollutants for which SCAB is in nonattainment, and, therefore, would not be considered to have a significant, adverse air quality impact. Alternatively, individual project-related construction and operational emissions that exceed SCAQMD thresholds for project-specific impacts would be considered cumulatively considerable.

# **CONSTRUCTION IMPACTS**

The Project-specific evaluation of emissions presented in the preceding analysis demonstrates that proposed Project construction-source air pollutant emissions would not result in exceedances of regional thresholds. Therefore, proposed Project construction-source emissions would be considered less than significant on a project-specific and cumulative basis.

# **OPERATIONAL IMPACTS**

The Project-specific evaluation of emissions presented in the preceding analysis demonstrates that proposed Project operation-source air pollutant emissions would not result in exceedances



of regional thresholds. Therefore, proposed Project operation-source emissions would be considered less than significant on a project-specific and cumulative basis.



This page intentionally left blank



# 4 **REFERENCES**

- 1. State of California. 2020 CEQA California Environmental Quality Act. 2020.
- 2. **South Coast Air Quality Management District.** RULE 403. FUGITIVE DUST. [Online] https://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-403.pdf?sfvrsn=4.
- 3. —. RULE 1113. Architectural Coatings. [Online] http://www.aqmd.gov/docs/default-source/rule-book/reg-xi/r1113.pdf.
- 4. —. Southern California Air Basins. [Online] https://www.arb.ca.gov/msprog/onroad/porttruck/maps/scabc7map.pdf.
- 5. —. Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning. 2005.
- 6. **St. Croix Sensory, Inc.** *The "Gray Line" Between Odor Nuisance and Health Effects.* 2000.
- 7. California Air Resources Board. Ambient Air Quality Standards (AAQS). [Online] 2016. http://www.arb.ca.gov/research/aaqs/aaqs2.pdf.
- 8. United State Environmental Protection Agency. Frequent Questions about General Conformity . *EPA*. [Online] https://www.epa.gov/general-conformity/frequent-questions-about-general-conformity#8.
- 9. South Coast Air Quality Management District. Annual Air Quality Monitoring Network Plan. [Online] July 2018. http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-monitoringnetwork-plan/annual-air-quality-monitoring-network-plan-v2.pdf?sfvrsn=2.
- 10. Air Resources Board. State and National Ambient Air Quality Standards. [Online] https://www.arb.ca.gov/regact/2019/stateareadesignations/appc.pdf?\_ga=2.169398369.15376157 02.1554741141-1192937971.1505156621.
- 11. **District, South Coast Air Quality Management.** Air Quality Data Tables. [Online] https://www.aqmd.gov/home/air-quality/air-quality-data-studies/historical-data-by-year.
- 12. Environmental Protection Agency. National Ambient Air Quality Standards (NAAQS). [Online] 1990. https://www.epa.gov/environmental-topics/air-topics.
- 13. —. Air Pollution and the Clean Air Act. [Online] http://www.epa.gov/air/caa/.
- 14. **United States Environmental Protection Agency.** 1990 Clean Air Act Amendment Summary: Title I. [Online] https://www.epa.gov/clean-air-act-overview/1990-clean-air-act-amendment-summarytitle-i.
- 15. —. 1990 Clean Air Act Amendment Summary: Title II. [Online] https://www.epa.gov/clean-air-act-overview/1990-clean-air-act-amendment-summary-title-ii.
- 16. Air Resources Board. California Ambient Air Quality Standards (CAAQS). [Online] 2009. [Cited: April 16, 2018.] http://www.arb.ca.gov/research/aaqs/caaqs/caaqs.htm.
- 17. Southern California Association of Governments. 2016-2040 Regional Transportation Plan/Sustainable Communities Strategy. [Online] April 2016. http://scagrtpscs.net/Documents/2016/final/f2016RTPSCS.pdf.
- 18. South Coast Air Quality Management District. Air Quality Management Plan. 2012.
- 19. California Air Resources Board. The California Almanac of Emissions and Air Quality. 2013.
- 20. **South Coast AQMD.** South Coast Air Basin Ozone Trend. [Online] https://www.aqmd.gov/home/air-quality/historical-air-quality-data/historic-ozone-air-quality-trends.



- 21. California Air Resources Board. iADAM: Air Quality Data Statistics. *California Air Resources Board.* [Online] https://arb.ca.gov/adam/topfour/topfour1.php.
- 22. Environmental Protection Agency. Approval and Promulgation of Implementation Plans; California; South Coast Serious Area Plan for the 2006 PM2.5. [Online] 2019. https://www.federalregister.gov/documents/2019/02/12/2019-01922/approval-and-promulgationof-implementation-plans-california-south-coast-serious-area-plan-for-the.
- 23. South Coast Air Quality Management District. Final 2016 Air Quality Management Plan. South Coast Air Quality Management District. [Online] March 2017. http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2016-air-quality-management-plan/final-2016-aqmp/final2016aqmp.pdf.
- 24. South coast Air Quality Management District. CEQA Air Quality Handbook (1993). 1993.
- 25. **California Environmental Protection Agency Air Resources Board.** Nitrogen Dioxide- Overview. [Online] http://www.arb.ca.gov/research/aaqs/caaqs/no2-1/no2-1.htm.
- 26. Ralph Propper, Patrick Wong, Son Bui, Jeff Austin, William Vance, Alvaro Alvarado, Bart Croes, and Dongmin Luo. Ambient and Emission Trends of Toxic Air Contaminants in California. *American Chemical Society: Environmental Science & Technology*. 2015.
- 27. **Air Resources Board.** ARB's Drayage Truck Regulatory Activities. [Online] http://www.arb.ca.gov/msprog/onroad/porttruck/porttruck.htm.
- 28. —. Truck and Bus Regulation. On-Road Heavy-Duty Diesel Vehicles (In-Use) Regulation. [Online] http://www.arb.ca.gov/msprog/onrdiesel/onrdiesel.htm.
- 29. **The Port of Los Angeles.** Clean Truck Program. [Online] http://www.portoflosangeles.org/ctp/idx\_ctp.asp.
- 30. California Air Pollution Control Officers Association (CAPCOA). Appendix A: Calculation Details for CalEEMod. [Online] October 2021. http://www.aqmd.gov/docs/default-source/caleemod/user-guide-2021/appendix-a2020-4-0.pdf?sfvrsn=6.
- 31. South Coast Air Quality Management District. Transfer Funds, Appropriate Funding, Execute Purchase Orders, Execute Contrat and Authorize Release of RFQs for the Fifth Multiple Air Toxics Exposure Study. South Coast Air Quality Management District. [Online] 2017. http://www.aqmd.gov/docs/default-source/Agendas/Governing-Board/2017/2017-jul7-009.pdf?sfvrsn=7.
- 32. —. Executive Summary. *MATES V Draft Report.* [Online] 2021. http://www.aqmd.gov/docs/default-source/planning/mates-v/draft-mates-v-executive-summary\_v2.pdf?sfvrsn=6.
- 33. **South Coast Air Quality Management District (SCAQMD).** SCAQMD Air Quality Significance Thresholds. [Online] http://www.aqmd.gov/docs/default-source/ceqa/handbook/scaqmd-air-quality-significance-thresholds.pdf?sfvrsn=2.
- 34. **California Air Pollution Control Officers Association (CAPCOA).** California Emissions Estimator Model (CalEEMod). [Online] www.caleemod.com.
- 35. U.S. Environmental Protection Agency. *Compilation of Air Pollutant Emission Factors.* 1995. AP-42.
- 36. **Urban Crossroads, Inc.** *Muranaka Warehouse Project Traffic Impact Analysis.* 2021.
- 37. Lake Environmental. US EPA Models. *Lake Environmental.* [Online] http://www.weblakes.com/download/us\_epa.html.



- 38. South Coast Air Quality Management District. Fact Sheet for Applying CalEEMod to Localized Significance Thresholds. [Online] http://www.aqmd.gov/docs/default-source/ceqa/handbook/localized-significance-thresholds/caleemod-guidance.pdf.
- 39. —. *Localized Significance Thresholds Methodology*. s.l. : South Coast Air Quality Managment District, 2008.
- 40. —. 2003 Air Quality Management Plan. [Online] 2003. https://www.aqmd.gov/home/airquality/clean-air-plans/air-quality-mgt-plan/2003-aqmp.
- 41. Bay Area Air Quality Management District. [Online] http://www.baaqmd.gov/.
- 42. South Coast Air Quality Management District. Final 2016 Air Quality Management Plan (AQMP). [Online] March 2017. http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2016-air-quality-management-plan/final-2016aqmp/final2016aqmp.pdf?sfvrsn=11.
- 43. South coast Air Quality Management District. CEQA Air Quality Handbook (1993). 1993.
- 44. **County of Riverside.** County of Riverside General Plan: Land Use Element. [Online] 2021. https://planning.rctlma.org/Portals/14/genplan/2021/Ch03\_Land%20Use\_06.29.21.pdf.
- 45. —. Code of Ordinances. [Online] 2021. https://library.municode.com/ca/riverside\_county/codes/code\_of\_ordinances.
- 46. Urban Crossroads, Inc. Muranaka Warehouse Mobile Source Health Risk Assessment. 2021.
- 47. South Coast Air Quality Management District. Sierra Club, Revive the San Joaquin and League of Women Voters of Fresno, Plaintiffs and Appellants, v. County of Fresno, Defendant and Respondent and, Friant Ranchm L.P. Real Party in Interest and Respondent. [Online] 2015. https://www.courts.ca.gov/documents/9-s219783-ac-south-coast-air-quality-mgt-dist-041315.pdf.
- 48. San Joaquin Valley Unified Air Pollution Control District. Application for Leave to File Amicus Curiae Brieft of San Joaquin Valley Unified Air Pollutant Control District in Support of Defendent and Respondent, County of Fresno and Real Party in Interest and Respondent, Friant Ranch, L.P. [Online] 2015. https://www.courts.ca.gov/documents/7-s219783-ac-san-joaquin-valley-unified-air-pollutioncontrol-dist-041315.pdf.
- 49. South Coast Air Quality Management District. Final 2012 Air Quality Management Plan. 2015.
- 50. —. RULE 402 NUISANCE. [Online] http://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-402.pdf.
- 51. Goss, Tracy A and Kroeger, Amy. White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution. [Online] South Coast Air Quality Management District, 2003. http://www.aqmd.gov/rules/ciwg/final\_white\_paper.pdf.
- 52. Air Resources Board. Air Quality and Land Use Handbook: A Community Health Perspective. 2005.
- 53. **OEHHA.** Air Toxics Hot Spots Program Risk Assessment Guidelines. 2015.



This page intentionally left blank



# 5 CERTIFICATIONS

The contents of this air study report represent an accurate depiction of the environmental impacts associated with the proposed Muranaka Warehouse. The information contained in this air quality impact assessment report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at hqureshi@urbanxroads.com

Haseeb Qureshi Associate Principal URBAN CROSSROADS, INC. hqureshi@urbanxroads.com

## **EDUCATION**

Master of Science in Environmental Studies California State University, Fullerton • May 2010

Bachelor of Arts in Environmental Analysis and Design University of California, Irvine • June, 2006

## **PROFESSIONAL AFFILIATIONS**

AEP – Association of Environmental Planners AWMA – Air and Waste Management Association ASTM – American Society for Testing and Materials

## **PROFESSIONAL CERTIFICATIONS**

Planned Communities and Urban Infill – Urban Land Institute • June 2011 Indoor Air Quality and Industrial Hygiene – EMSL Analytical • April 2008 Principles of Ambient Air Monitoring – CARB • August 2007 AB2588 Regulatory Standards – Trinity Consultants • November 2006 Air Dispersion Modeling – Lakes Environmental • June 2006 This page intentionally left blank



APPENDIX 2.1:

# STATE/FEDERAL ATTAINMENT STATUS OF CRITERIA POLLUTANTS



## **APPENDIX C**

# MAPS AND TABLES OF AREA DESIGNATIONS FOR STATE AND NATIONAL AMBIENT AIR QUALITY STANDARDS

[This page intentionally left blank]

### APPENDIX C

#### MAPS AND TABLES OF AREA DESIGNATIONS FOR STATE AND NATIONAL AMBIENT AIR QUALITY STANDARDS

This attachment fulfills the requirement of Health and Safety Code section 40718 for CARB to publish maps that identify areas where one or more violations of any State ambient air quality standard (State standard) or national ambient air quality standard (national standard) have been measured. The national standards are those promulgated under section 109 of the federal Clean Air Act (42 U.S.C. 7409).

This attachment is divided into three parts. The first part comprises a table showing the levels, averaging times, and measurement methods for each of the State and national standards. This is followed by a section containing maps and tables showing the area designations for each pollutant for which there is a State standard in the California Code of Regulations, title 17, section 70200. The last section contains maps and tables showing the most current area designations for the national standards.

		Ambient /	Air Quality (Updated 5/4/16)	v Standards	6	
Dellutent	Averaging	California S	tandards <sup>1</sup>	Na	tional Standards	2
Pollutant	Time	Concentration <sup>3</sup>	Method 4	Primary 3.5	Secondary 3.6	Method 7
0-ene (0)*	1 Hour	0.09 ppm (180 µg/m³)	Illurovialet Dhotomotry	—	Same as Primary	Ultraviolet
Ozone (O₃)º	8 Hour	0.070 ppm (137 µg/m³)	Ultraviolet Photometry	0.070 ppm (137 µg/m³)	Standard	Photometry
Respirable	24 Hour	50 μg/m³	Gravimetric or Beta	150 µg/m³	Same as Primary	Inertial Separation
Particulate Matter (PM10) <sup>9</sup>	Annual Arithmetic Mean	20 µg/m³	Attenuation	—	Standard	and Gravimetric Analysis
Fine Particulate	24 Hour	_	—	35 μg/m³	Same as Primary Standard	Inertial Separation
Matter (PM2.5)°	Annual Arithmetic Mean	12 µg/m³	Gravimetric or Beta Attenuation	12.0 µg/m³	15 µg/m³	and Gravimetric Analysis
Carbon	1 Hour	20 ppm (23 mg/m³)	Non-Dispersive	35 ppm (40 mg/m³)	_	Non Diaparaiya
Monoxide	8 Hour	9.0 ppm (10 mg/m²)	Infrared Photometry (NDIR)	9 ppm (10 mg/m²)	-	Non-Dispersive Infrared Photometry (NDIR)
(CO)	8 Hour (Lake Tahoe)	6 ppm (7 mg/m²)	(INDIK)	_	_	(INDIK)
Nitrogen Dioxide	1 Hour	0.18 ppm (339 µg/m³)	Gas Phase	100 ppb (188 µg/m³) —		Gas Phase
(NO₂) <sup>™</sup>	Annual Arithmetic Mean	0.030 ppm (57 μg/m³)	Chemiluminescence	0.053 ppm (100 µg/m³)	Same as Primary Standard	Chemiluminescence
	1 Hour	0.25 ppm (655 µg/m²)		75 ppb (196 µg/m³)	_	
Sulfur Dioxide	3 Hour	_	Ultraviolet	0.5 ppm (130 μg/m³)		Ultraviolet Flourescence; Spectrophotometry
(SO₂)'¹	24 Hour	0.04 ppm (105 μg/m³)	Fluorescence	0.14 ppm (for certain areas) <sup>11</sup>	_	(Pararosaniline Method)
	Annual Arithmetic Mean	_		0.030 ppm (for certain areas) <sup>11</sup>	_	. Wethod)
	30 Day Average	1.5 µg/m²				
Lead <sup>12,13</sup>	Calendar Quarter	_	Atomic Absorption	1.5 μg/m³ (for certain areas)12	Same as Primary	High Volume Sampler and Atomic Absorption
	Rolling 3-Month Average	_		0.15 µg/m²	Standard	·
Visibility Reducing Particles <sup>4</sup>	8 Hour	See footnote 14	Beta Attenuation and Transmittance through Filter Tape		No	
Sulfates	24 Hour	25 µg/m²	lon Chromatography		National	
Hydrogen Sulfide	1 Hour	0.03 ppm (42 µg/m³)	Ultraviolet Fluorescence			
Vinyl Chloride <sup>12</sup>	24 Hour	0.01 ppm (26 µg/m³)	Gas Chromatography			
See footnotes o	on next page					

- California standards for ozone, carbon monoxide (except 8-hour Lake Tahoe), sulfur dioxide (1- and 24-hour), nitrogen dioxide, and particulate matter (PM10, PM2.5, and visibility reducing particles), are values that are not to be exceeded. All others are not to be equaled or exceeded. California ambient air quality standards are listed in the Table of Standards in Section 70200 of Title 17 of the California Code of Regulations.
- 2. National standards (other than ozone, particulate matter, and those based on annual arithmetic mean) are not to be exceeded more than once a year. The ozone standard is attained when the fourth highest 8-hour concentration measured at each site in a year, averaged over three years, is equal to or less than the standard. For PM10, the 24-hour standard is attained when the expected

number of days per calendar year with a 24-hour average concentration above  $150 \,\mu g/m^3$  is equal to or less than one. For PM2.5, the 24-hour standard is attained when 98 percent of the daily concentrations, averaged over three years, are equal to or less than the standard. Contact the U.S. EPA for further clarification and current national policies.

- 3. Concentration expressed first in units in which it was promulgated. Equivalent units given in parentheses are based upon a reference temperature of 25°C and a reference pressure of 760 torr. Most measurements of air quality are to be corrected to a reference temperature of 25°C and a reference pressure of 760 torr; ppm in this table refers to ppm by volume, or micromoles of pollutant per mole of gas.
- 4. Any equivalent measurement method which can be shown to the satisfaction of the CARB to give equivalent results at or near the level of the air quality standard may be used.
- 5. National Primary Standards: The levels of air quality necessary, with an adequate margin of safety to protect the public health.
- 6. National Secondary Standards: The levels of air quality necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant.
- 7. Reference method as described by the U.S. EPA. An "equivalent method" of measurement may be used but must have a "consistent relationship to the reference method" and must be approved by the U.S. EPA.
- 8. On October 1, 2015, the national 8-hour ozone primary and secondary standards were lowered from 0.075 to 0.070 ppm.
- 9. On December 14, 2012, the national annual PM2.5 primary standard was lowered from 15 μg/m<sup>3</sup> to 12.0 μg/m<sup>3</sup>. The existing national 24-hour PM2.5 standards (primary and secondary) were retained at 35 μg/m<sup>3</sup>, as was the annual secondary standard of 15 μg/m<sup>3</sup>. The existing 24-hour PM10 standards (primary and secondary) of 150 μg/m<sup>3</sup> also were retained. The form of the annual primary and secondary standards is the annual mean, averaged over 3 years.
- 10. To attain the 1-hour national standard, the 3-year average of the annual 98th percentile of the 1-hour daily maximum concentrations at each site must not exceed 100 ppb. Note that the national 1-hour standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the national 1-hour standard to the California standards the units can be converted from ppb to ppm. In this case, the national standard of 100 ppb is identical to 0.100 ppm.
- 11. On June 2, 2010, a new 1-hour SO<sub>2</sub> standard was established and the existing 24-hour and annual primary standards were revoked. To attain the 1-hour national standard, the 3-year average of the annual 99th percentile of the 1-hour daily maximum concentrations at each site must not exceed 75 ppb. The 1971 SO<sub>2</sub> national standards (24-hour and annual) remain in effect until one year after an area is designated for the 2010 standard, except that in areas designated nonattainment for the 1971 standards, the 1971 standards remain in effect until implementation plans to attain or maintain the 2010 standards are approved.

Note that the 1-hour national standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the 1-hour national standard to the California standard the units can be converted to ppm. In this case, the national standard of 75 ppb is identical to 0.075 ppm.

- 12. The CARB has identified lead and vinyl chloride as 'toxic air contaminants' with no threshold level of exposure for adverse health effects determined. These actions allow for the implementation of control measures at levels below the ambient concentrations specified for these pollutants.
- 13. The national standard for lead was revised on October 15, 2008 to a rolling 3-month average. The 1978 lead standard  $(1.5 \,\mu\text{g/m}^3 \text{ as a quarterly average})$  remains in effect until one year after an area is designated for the 2008 standard, except that in areas designated nonattainment for the 1978 standard, the 1978 standard remains in effect until implementation plans to attain or maintain the 2008 standard are approved.
- 14. In 1989, the CARB converted both the general statewide 10-mile visibility standard and the Lake Tahoe 30-mile visibility standard to instrumental equivalents, which are "extinction of 0.23 per kilometer" and "extinction of 0.07 per kilometer" for the statewide and Lake Tahoe Air Basin standards, respectively.

[This page intentionally left blank]

### Area Designations for the State Ambient Air Quality Standards

The following maps and tables show the area designations for each pollutant with a State standard set forth in the California Code of Regulations, title 17, section 60200. Each area is identified as attainment, nonattainment, nonattainment-transitional, or unclassified for each pollutant, as shown below:

Attainment	А
Nonattainment	N
Nonattainment-Transitional	NA-T
Unclassified	U

In general, CARB designates areas by air basin for pollutants with a regional impact and by county for pollutants with a more local impact. However, when there are areas within an air basin or county with distinctly different air quality deriving from sources and conditions not affecting the entire air basin or county, CARB may designate a smaller area. Generally, when boundaries of the designated area differ from the air basin or county boundaries, the description of the specific area is referenced at the bottom of the summary table.




Air Quality Planning and Science Division

# California Ambient Air Quality Standards Area Designations for Ozone <sup>(1)</sup>

	Ν	NA-T	U	Α		N	NA-T	U	Α
GREAT BASIN VALLEYS AIR BASIN					NORTHEAST PLATEAU AIR BASIN				Х
Alpine County			Х		SACRAMENTO VALLEY AIR BASIN				
Inyo County	Х				Colusa and Glenn Counties				Х
Mono County	Х				Sutter/Yuba Counties				
LAKE COUNTY AIR BASIN				Х	Sutter Buttes	Х			
LAKE TAHOE AIR BASIN				Х	Remainder of Sutter County				Х
MOJAVE DESERT AIR BASIN	Х				Yuba County				Х
MOUNTAIN COUNTIES AIR BASIN					Yolo/Solano Counties		Х		
Amador County	Х				Remainder of Air Basin	Х			
Calaveras County	Х				SALTON SEA AIR BASIN	Х			
El Dorado County (portion)	Х				SAN DIEGO AIR BASIN	Х			
Mariposa County	Х				SAN FRANCISCO BAY AREA AIR BASIN	Х			
Nevada County	Х				SAN JOAQUIN VALLEY AIR BASIN	Х			
Placer County (portion)	Х				SOUTH CENTRAL COAST AIR BASIN				
Plumas County			Х		San Luis Obispo County	Х			
Sierra County			Х		Santa Barbara County		Х		
Tuolumne County	Х				Ventura County	Х			
NORTH CENTRAL COAST AIR BASIN		Х			SOUTH COAST AIR BASIN	Х			
NORTH COAST AIR BASIN				Х					

(1) AB 3048 (Olberg) and AB 2525 (Miller) signed into law in 1996, made changes to Health and Safety Code, section 40925.5. One of the changes allows nonattainment districts to become nonattainment-transitional for ozone by operation of law.

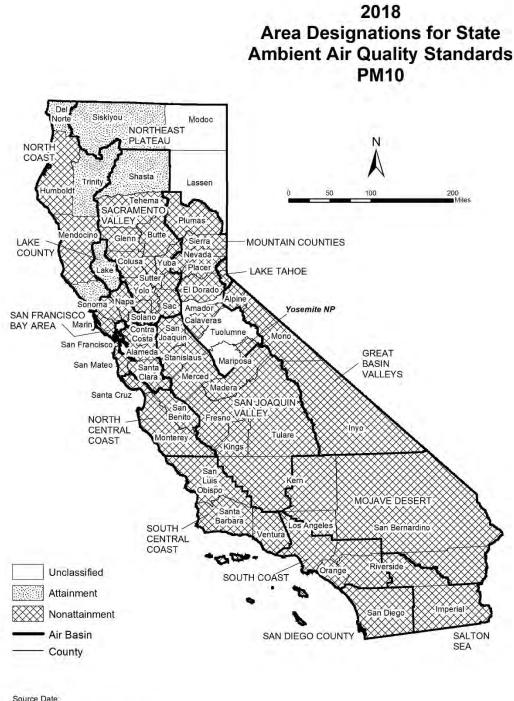

Source Date. October 2018 Air Quality Planning and Science Division

# California Ambient Air Quality Standards Area Designation for Suspended Particulate Matter (PM10)

	N	υ	Α		Ν	U	Α
GREAT BASIN VALLEYS AIR BASIN	Х			NORTH CENTRAL COAST AIR BASIN	Х		
LAKE COUNTY AIR BASIN			Х	NORTH COAST AIR BASIN			
LAKE TAHOE AIR BASIN	Х			Del Norte, Sonoma (portion) and Trinity Counties			Х
MOJAVE DESERT AIR BASIN	х			Remainder of Air Basin	Х		
MOUNTAIN COUNTIES AIR BASIN				NORTHEAST PLATEAU AIR BASIN			
Amador County		Х		Siskiyou County			Х
Calaveras County	Х			Remainder of Air Basin		Х	
El Dorado County (portion)	Х			SACRAMENTO VALLEY AIR BASIN			
Mariposa County				Shasta County			Х
- Yosemite National Park	х			Remainder of Air Basin	Х		
- Remainder of County		Х		SALTON SEA AIR BASIN	Х		
Nevada County	х			SAN DIEGO AIR BASIN	Х		
Placer County (portion)	Х			SAN FRANCISCO BAY AREA AIR BASIN	Х		
Plumas County	Х			SAN JOAQUIN VALLEY AIR BASIN	Х		
Sierra County	Х			SOUTH CENTRAL COAST AIR BASIN	Х		
Tuolumne County		Х		SOUTH COAST AIR BASIN	Х		



Source Date: October 2018 Air Quality Planning and Science Division

### California Ambient Air Quality Standards Area Designations for Fine Particulate Matter (PM2.5)

	Ν	U	Α		Ν	U	Α
GREAT BASIN VALLEYS AIR BASIN			Х	SALTON SEA AIR BASIN			
LAKE COUNTY AIR BASIN			Х	Imperial County			
LAKE TAHOE AIR BASIN			Х	- City of Calexico (3)	Х		
MOJAVE DESERT AIR BASIN				Remainder of Air Basin			Х
San Bernardino County				SAN DIEGO AIR BASIN	Х		
- County portion of federal Southeast			x	SAN FRANCISCO BAY AREA AIR BASIN	Х		
Desert Modified AQMA for Ozone (1)			^	SAN JOAQUIN VALLEY AIR BASIN	Х		
Remainder of Air Basin		Х		SOUTH CENTRAL COAST AIR BASIN			
MOUNTAIN COUNTIES AIR BASIN				San Luis Obispo County			Х
Plumas County				Santa Barbara County		Х	
- Portola Valley (2)	Х			Ventura County			Х
Remainder of Air Basin		Х		SOUTH COAST AIR BASIN	Х		
NORTH CENTRAL COAST AIR BASIN			Х				
NORTH COAST AIR BASIN			Х				
NORTHEAST PLATEAU AIR BASIN			Х				
SACRAMENTO VALLEY AIR BASIN							
Butte County	х						
Colusa County			Х				
Glenn County			Х				
Placer County (portion)			Х				
Sacramento County			Х				
Shasta County			Х				
Sutter and Yuba Counties			Х				
Remainder of Air Basin		Х					

(1) California Code of Regulations, title 17, section 60200(b)

(2) California Code of Regulations, title 17, section 60200(c)

(3) California Code of Regulations, title 17, section 60200(a)

2018




Source Date: October 2018 Air Quality Planning and Science Division

# California Ambient Air Quality Standards Area Designation for Carbon Monoxide\*

	Ν	NA-T	U	Α		N	NA-T	U	Α
GREAT BASIN VALLEYS AIR BASIN		-			SACRAMENTO VALLEY AIR BASIN				
Alpine County			Х		Butte County				Х
Inyo County				Х	Colusa County			Х	
Mono County				Х	Glenn County			Х	
LAKE COUNTY AIR BASIN				Х	Placer County (portion)				Х
LAKE TAHOE AIR BASIN				Х	Sacramento County				Х
MOJAVE DESERT AIR BASIN		-			Shasta County			Х	
Kern County (portion)			Х		Solano County (portion)				Х
Los Angeles County (portion)				Х	Sutter County				Х
Riverside County (portion)			Х		Tehama County			Х	
San Bernardino County (portion)				Х	Yolo County				Х
MOUNTAIN COUNTIES AIR BASIN					Yuba County			Х	
Amador County			Х		SALTON SEA AIR BASIN				Х
Calaveras County			Х		SAN DIEGO AIR BASIN				Х
El Dorado County (portion)			Х		SAN FRANCISCO BAY AREA AIR BASIN				Х
Mariposa County			Х		SAN JOAQUIN VALLEY AIR BASIN				
Nevada County			Х		Fresno County				Х
Placer County (portion)			Х		Kern County (portion)				Х
Plumas County				Х	Kings County			Х	
Sierra County			Х		Madera County			Х	
Tuolumne County				Х	Merced County			Х	
NORTH CENTRAL COAST AIR BASIN					San Joaquin County				Х
Monterey County				Х	Stanislaus County				Х
San Benito County			Х		Tulare County				Х
Santa Cruz County			Х		SOUTH CENTRAL COAST AIR BASIN				Х
NORTH COAST AIR BASIN					SOUTH COAST AIR BASIN				Х
Del Norte County			Х						
Humboldt County				Х					
Mendocino County				Х					
Sonoma County (portion)			Х						
Trinity County			Х						
NORTHEAST PLATEAU AIR BASIN			Х						

\* The area designated for carbon monoxide is a county or portion of a county

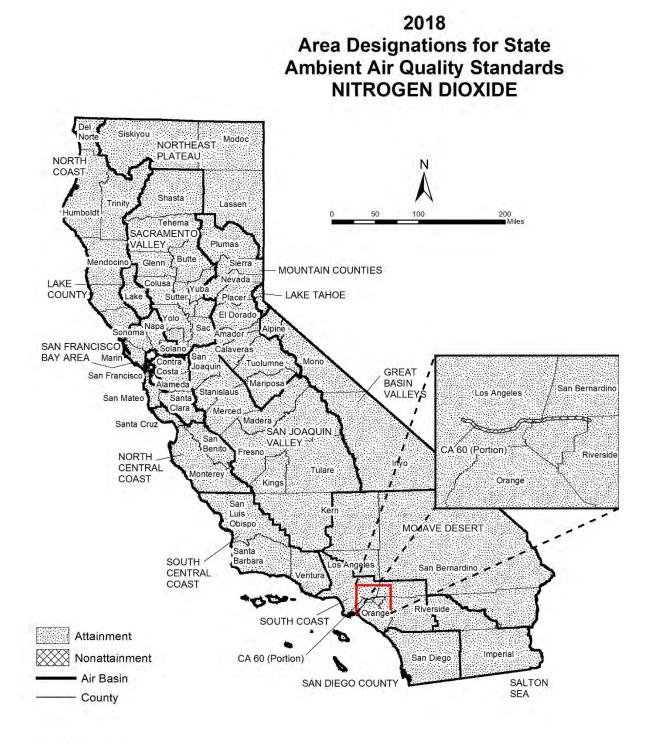

Source Date: October 2018 Air Quality Planning and Science Division

# California Ambient Air Quality Standards Area Designation for Nitrogen Dioxide

	Ν	U	Α		Ν	υ	Α
GREAT BASIN VALLEYS AIR BASIN			Х	SACRAMENTO VALLEY AIR BASIN			Х
LAKE COUNTY AIR BASIN			Х	SALTON SEA AIR BASIN			Х
LAKE TAHOE AIR BASIN			Х	SAN DIEGO AIR BASIN			Х
MOJAVE DESERT AIR BASIN			Х	SAN FRANCISCO BAY AREA AIR BASIN			Х
MOUNTAIN COUNTIES AIR BASIN			Х	SAN JOAQUIN VALLEY AIR BASIN			Х
NORTH CENTRAL COAST AIR BASIN			Х	SOUTH CENTRAL COAST AIR BASIN			Х
NORTH COAST AIR BASIN			Х	SOUTH COAST AIR BASIN			
NORTHEAST PLATEAU AIR BASIN			х	CA 60 Near-road Portion of San Bernardino, Riverside, and Los Angeles Counties	х		
				Remainder of Air Basin			Х



### California Ambient Air Quality Standards Area Designation for Sulfur Dioxide\*

	Ν	U/A		Ν	U/A
GREAT BASIN VALLEYS AIR BASIN		Х	SACRAMENTO VALLEY AIR BASIN		Х
LAKE COUNTY AIR BASIN		Х	SALTON SEA AIR BASIN		Х
LAKE TAHOE AIR BASIN		Х	SAN DIEGO AIR BASIN		Х
MOJAVE DESERT AIR BASIN		Х	SAN FRANCISCO BAY AREA AIR BASIN		Х
MOUNTAIN COUNTIES AIR BASIN		Х	SAN JOAQUIN VALLEY AIR BASIN		Х
NORTH CENTRAL COAST AIR BASIN		Х	SOUTH CENTRAL COAST AIR BASIN		Х
NORTH COAST AIR BASIN		Х	SOUTH COAST AIR BASIN		Х
NORTHEAST PLATEAU AIR BASIN		Х			

\* The area designated for sulfur dioxide is a county or portion of a county



# California Ambient Air Quality Standards Area Designation for Sulfates

	Ν	U	Α		Ν	U	Α
GREAT BASIN VALLEYS AIR BASIN			Х	SACRAMENTO VALLEY AIR BASIN			Х
LAKE COUNTY AIR BASIN			Х	SALTON SEA AIR BASIN			Х
LAKE TAHOE AIR BASIN			Х	SAN DIEGO AIR BASIN			Х
MOJAVE DESERT AIR BASIN			Х	SAN FRANCISCO BAY AREA AIR BASIN			Х
MOUNTAIN COUNTIES AIR BASIN			Х	SAN JOAQUIN VALLEY AIR BASIN			Х
NORTH CENTRAL COAST AIR BASIN			Х	SOUTH CENTRAL COAST AIR BASIN			Х
NORTH COAST AIR BASIN			Х	SOUTH COAST AIR BASIN			Х
NORTHEAST PLATEAU AIR BASIN			Х				

2018




October 2018 Air Quality Planning and Science Division

# California Ambient Air Quality Standards Area Designations for Lead (particulate)\*

	Ν	U	Α		Ν	U	Α
GREAT BASIN VALLEYS AIR BASIN			Х	SALTON SEA AIR BASIN			Х
LAKE COUNTY AIR BASIN			Х	SAN DIEGO AIR BASIN			Х
LAKE TAHOE AIR BASIN			Х	SAN FRANCISCO BAY AREA AIR BASIN			Х
MOJAVE DESERT AIR BASIN			Х	SAN JOAQUIN VALLEY AIR BASIN			Х
MOUNTAIN COUNTIES AIR BASIN			Х	SOUTH CENTRAL COAST AIR BASIN			Х
NORTH CENTRAL COAST AIR BASIN			Х	SOUTH COAST AIR BASIN			Х
NORTH COAST AIR BASIN			Х				
NORTHEAST PLATEAU AIR BASIN			Х				
SACRAMENTO VALLEY AIR BASIN			Х				

\* The area designated for lead is a county or portion of a county. Since all areas in the State are in attainment for this standard, air basins are indicated here for simplicity.

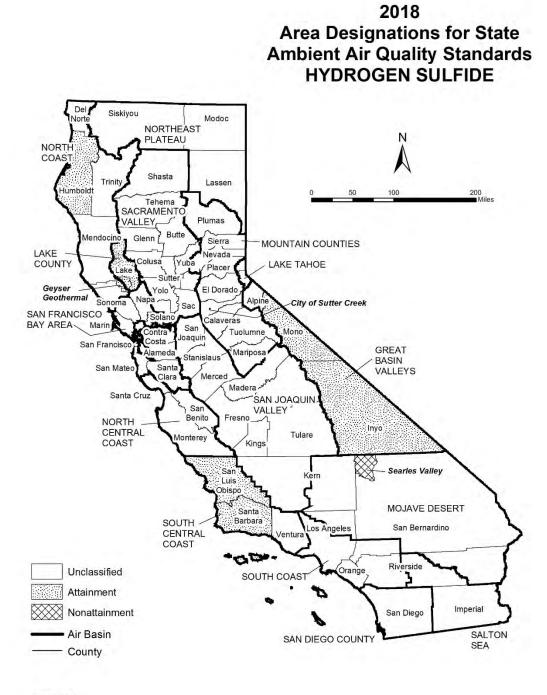

Source Date: October 2018 Air Quality Planning and Science Division

## California Ambient Air Quality Standards Area Designation for Hydrogen Sulfide\*

	Ν	NA-T	U	Α		Ν	NA-T	U	Α
GREAT BASIN VALLEYS AIR BASIN					NORTH CENTRAL COAST AIR BASIN			Х	
Alpine County			Х		NORTH COAST AIR BASIN				
Inyo County				Х	Del Norte County			Х	
Mono County				Х	Humboldt County				Х
LAKE COUNTY AIR BASIN				Х	Mendocino County			Х	
LAKE TAHOE AIR BASIN			Х		Sonoma County (portion)				
MOJAVE DESERT AIR BASIN					- Geyser Geothermal Area (2)				Х
Kern County (portion)			Х		- Remainder of County			Х	
Los Angeles County (portion)			Х		Trinity County			Х	
Riverside County (portion)			Х		NORTHEAST PLATEAU AIR BASIN			Х	
San Bernardino County (portion)					SACRAMENTO VALLEY AIR BASIN			Х	
- Searles Valley Planning Area (1)	Х				SALTON SEA AIR BASIN			Х	
- Remainder of County			Х		SAN DIEGO AIR BASIN			Х	
MOUNTAIN COUNTIES AIR BASIN					SAN FRANCISCO BAY AREA AIR BASIN			Х	
Amador County					SAN JOAQUIN VALLEY AIR BASIN			Х	
- City of Sutter Creek	Х				SOUTH CENTRAL COAST AIR BASIN				
- Remainder of County			Х		San Luis Obispo County				Х
Calaveras County			Х		Santa Barbara County				Х
El Dorado County (portion)			Х		Ventura County			Х	
Mariposa County			Х		SOUTH COAST AIR BASIN			Х	
Nevada County			Х						
Placer County (portion)			Х						
Plumas County			Х						
Sierra County			Х						
Tuolumne County			Х						

\* The area designated for hydrogen sulfide is a county or portion of a county

(1) 52 Federal Register 29384 (August 7, 1987)

(2) California Code of Regulations, title 17, section 60200(d)

2018



Source Date: October 2018 Air Quality Planning and Science Division

# California Ambient Air Quality Standards Area Designation for Visibility Reducing Particles

	Ν	NA-T	υ	Α		Ν	NA-T	U	Α
GREAT BASIN VALLEYS AIR BASIN			Х		SACRAMENTO VALLEY AIR BASIN			Х	
LAKE COUNTY AIR BASIN				Х	SALTON SEA AIR BASIN			Х	
LAKE TAHOE AIR BASIN			Х		SAN DIEGO AIR BASIN			Х	
MOJAVE DESERT AIR BASIN			Х		SAN FRANCISCO BAY AREA AIR BASIN			Х	
MOUNTAIN COUNTIES AIR BASIN			Х		SAN JOAQUIN VALLEY AIR BASIN			Х	
NORTH CENTRAL COAST AIR BASIN			Х		SOUTH CENTRAL COAST AIR BASIN			Х	
NORTH COAST AIR BASIN			Х		SOUTH COAST AIR BASIN			Х	
NORTHEAST PLATEAU AIR BASIN			Х						

## Area Designations for the National Ambient Air Quality Standards

The following maps and tables show the area designations for each pollutant with a national ambient air quality standard. Additional information about the federal area designations is available on the U.S. EPA website:

### https://www.epa.gov/green-book

Over the last several years, U.S. EPA has been reviewing the levels of the various national standards. The agency has already promulgated new standard levels for some pollutants and is considering revising the levels for others. Information about the status of these reviews is available on the U.S. EPA website:

https://www.epa.gov/criteria-air-pollutants

### **Designation Categories**

Suspended Particulate Matter ( $PM_{10}$ ). The U.S. EPA uses three categories to designate areas with respect to  $PM_{10}$ :

- Attainment
- Nonattainment
- Unclassifiable

Ozone, Fine Suspended Particulate Matter ( $PM_{2.5}$ ), Carbon Monoxide (CO), and Nitrogen Dioxide ( $NO_2$ ). The U.S. EPA uses two categories to designate areas with respect to these standards:

- Nonattainment
- Unclassifiable/Attainment

The national 1-hour ozone standard was revoked effective June 15, 2005, and the area designations map reflects the 2015 national 8-hour ozone standard of 0.070 ppm. Original designations were finalized on August 3, 2018.

On December 14, 2012, the U.S. EPA established a new national annual primary  $PM_{2.5}$  standard of 12.0 µg/m<sup>3</sup>. New area designations reflecting this revised standard became final in December 2014. The current designation map reflects the most recently revised (2012) annual average standard of 12.0 µg/m<sup>3</sup> as well as the 24-hour standard of 35 µg/m<sup>3</sup>, revised in 2006.

On January 22, 2010, the U.S. EPA established a new national 1-hour NO<sub>2</sub> standard of 100 parts per billion (ppb) and retained the annual average standard of 53 ppb. Designations for the primary NO<sub>2</sub> standard became effective on February 29, 2012. All areas of California meet this standard.

*Sulfur Dioxide (SO<sub>2</sub>).* The U.S. EPA uses three categories to designate areas with respect to the 24-hour and annual average sulfur dioxide standards. These designation categories are:

- Nonattainment,
- Unclassifiable, and
- Attainment/Unclassifiable.

On June 2, 2010, the U.S. EPA established a new primary 1-hour SO<sub>2</sub> standard of 75 parts per billion (ppb). At the same time, U.S. EPA revoked the 24-hour and annual

average standards. Area designations for the 1-hour SO<sub>2</sub> standard were finalized on December 21, 2017 and are reflected in the area designations map.


*Lead (particulate).* The U.S. EPA promulgated a new rolling 3-month average lead standard in October 2008 of 0.15  $\mu$ g/m<sup>3</sup>. Designations were made for this standard in November 2010.

### **Designation Areas**

From time to time, the boundaries of the California air basins have been changed to facilitate the planning process. CARB generally initiates these changes, and they are not always reflected in the U.S. EPA's area designations. For purposes of consistency, the maps in this attachment reflect area designation boundaries and nomenclature as promulgated by the U.S. EPA. In some cases, these may not be the same as those adopted by CARB. For example, the national area designations reflect the former Southeast Desert Air Basin. In accordance with Health and Safety Code section 39606.1, CARB redefined this area in 1996 to be the Mojave Desert Air Basin and Salton Sea Air Basin. The definitions and boundaries for all areas designated for the national standards can be found in Title 40, Code of Federal Regulations (CFR), Chapter I, Subchapter C, Part 81.305. They are available on the web at:

https://ecfr.io/Title-40/se40.20.81\_1305

# **FIGURE 11**

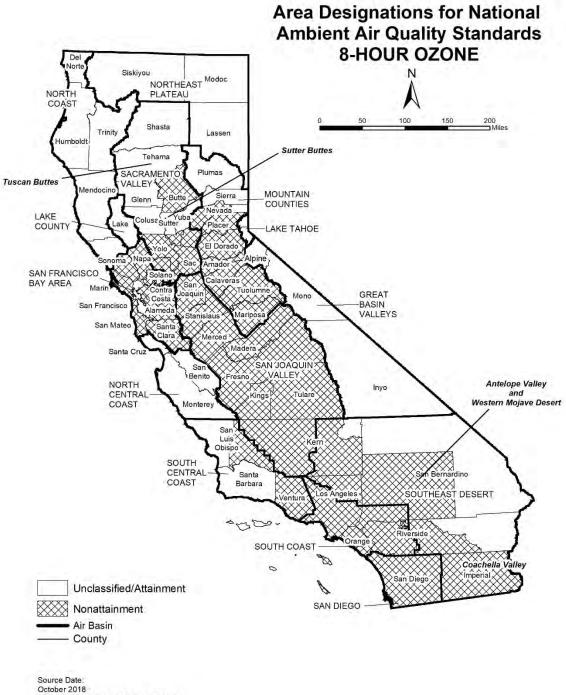

Air Quality Planning and Science Division

# TABLE 11

#### National Ambient Air Quality Standards Area Designations for 8-Hour Ozone\*

	N	U/A		Ν	U/A
GREAT BASIN VALLEYS AIR BASIN		Х	SACRAMENTO VALLEY AIR BASIN (cont.)		
LAKE COUNTY AIR BASIN		Х	Yolo County (2)	Х	
LAKE TAHOE AIR BASIN		Х	Yuba County		Х
MOUNTAIN COUNTIES AIR BASIN			SAN DIEGO COUNTY	Х	
Amador County	Х		SAN FRANCISCO BAY AREA AIR BASIN	Х	
Calaveras County	Х		SAN JOAQUIN VALLEY AIR BASIN	Х	
El Dorado County (portion) (2)	Х		SOUTH CENTRAL COAST AIR BASIN (1)		
Mariposa County	Х		San Luis Obispo County		
Nevada County		•	- Eastern San Luis Obispo County	Х	
- Western Nevada County	Х		- Remainder of County		Х
- Remainder of County		Х	Santa Barbara County		Х
Placer County (portion) (2)	Х		Ventura County		
Plumas County		Х	- Area excluding Anacapa and San Nicolas Islands	х	
Sierra County		Х	- Channel Islands (1)		Х
Tuolumne County	Х		SOUTH COAST AIR BASIN (1)		
NORTH CENTRAL COAST AIR BASIN		Х	SOUTHEAST DESERT AIR BASIN		
NORTH COAST AIR BASIN		Х	Kern County (portion)	Х	
NORTHEAST PLATEAU AIR BASIN		Х	- Indian Wells Valley		Х
SACRAMENTO VALLEY AIR BASIN			Imperial County	Х	
Butte County	Х		Los Angeles County (portion)	Х	
Colusa County		Х	Riverside County (portion)		
Glenn County		Х	- Coachella Valley	Х	
Sacramento Metro Area (2)	Х		- Non-AQMA portion		Х
Shasta County		Х	San Bernardino County		
Sutter County			- Western portion (AQMA)	Х	
- Sutter Buttes	Х		- Eastern portion (non-AQMA)		Х
<ul> <li>Southern portion of Sutter County (2)</li> </ul>	х				
- Remainder of Sutter County		Х			
Tehama County					
- Tuscan Buttes	Х				
- Remainder of Tehama County		Х			

\* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.

NOTE: This map and table reflect the 2015 8-hour ozone standard of 0.070 ppm.

(1) South Central Coast Air Basin Channel Islands:


Santa Barbara County includes Santa Cruz, San Miguel, Santa Rosa, and Santa Barbara Islands.

Ventura County includes Anacapa and San Nicolas Islands.

South Coast Air Basin:

Los Angeles County includes San Clemente and Santa Catalina Islands.

(2) For this purpose, the Sacramento Metro Area comprises all of Sacramento and Yolo Counties, the Sacramento Valley Air Basin portion of Solano County, the southern portion of Sutter County, and the Sacramento Valley and Mountain Counties Air Basins portions of Placer and El Dorado counties.

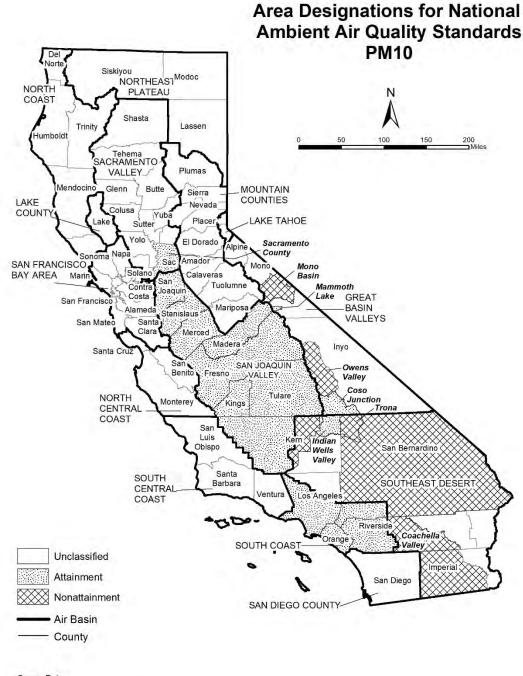

Source Date: October 2018 Air Quality Planning and Science Division

# TABLE 12

# **National Ambient Air Quality Standards** Area Designations for Suspended Particulate Matter (PM10)\*

	Ν	U	Α		Ν	U	Α
GREAT BASIN VALLEYS AIR BASIN				SAN DIEGO COUNTY		х	
Alpine County		Х		SAN FRANCISCO BAY AREA AIR BASIN		Х	
Inyo County				SAN JOAQUIN VALLEY AIR BASIN			Х
- Owens Valley Planning Area	Х			SOUTH CENTRAL COAST AIR BASIN		Х	
- Coso Junction			Х	SOUTH COAST AIR BASIN			Х
- Remainder of County		Х		SOUTHEAST DESERT AIR BASIN			
Mono County				Eastern Kern County			
- Mammoth Lake Planning Area			Х	- Indian Wells Valley			Х
- Mono Lake Basin	Х			- Portion within San Joaquin Valley Planning Area	х		
- Remainder of County		Х		- Remainder of County		Х	
LAKE COUNTY AIR BASIN		Х		Imperial County			
LAKE TAHOE AIR BASIN		Х		- Imperial Valley Planning Area	Х		
MOUNTAIN COUNTIES AIR BASIN				- Remainder of County		Х	
Placer County (portion) (2)		Х		Los Angeles County (portion)		Х	
Remainder of Air Basin		Х		Riverside County (portion)			
NORTH CENTRAL COAST AIR BASIN		х		- Coachella Valley (3)	х		
NORTH COAST AIR BASIN		Х		- Non-AQMA portion		Х	
NORTHEAST PLATEAU AIR BASIN		Х		San Bernardino County			
SACRAMENTO VALLEY AIR BASIN				- Trona	Х		
Butte County		Х		- Remainder of County	Х		
Colusa County		Х					
Glenn County		Х					
Placer County (portion) (2)		Х					
Sacramento County (1)			Х				
Shasta County		Х					
Solano County (portion)		Х					
Sutter County		Х					
Tehama County		Х					
Yolo County		Х					
Yuba County		Х					

\* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.
(1) Air quality in Sacramento County meets the national PM10 standards. The request for redesignation to

attainment was approved by U.S. EPA in September 2013. (2) U.S. EPA designation puts the Sacramento Valley Air Basin portion of Placer County in the Mountain Counties Air Basin.

(3) Air quality in Coachella Valley meets the national PM10 standards. A request for redesignation to attainment has been submitted to U.S. EPA.

# **FIGURE 13**



Area Designations for National Ambient Air Quality Standards PM2.5

October 2018 Air Quality Planning and Science Division

#### **TABLE 13**

# National Ambient Air Quality Standards Area Designations for Fine Particulate Matter (PM2.5)\*

	Ν	U/A		Ν	U/A
GREAT BASIN VALLEYS AIR BASIN		Х	SAN DIEGO COUNTY		Х
LAKE COUNTY AIR BASIN		Х	SAN FRANCISCO BAY AREA AIR BASIN (2)	Х	
LAKE TAHOE AIR BASIN		Х	SAN JOAQUIN VALLEY AIR BASIN	Х	
MOUNTAIN COUNTIES AIR BASIN			SOUTH CENTRAL COAST AIR BASIN		Х
Plumas County			SOUTH COAST AIR BASIN (3)	Х	
- Portola Valley Portion of Plumas	Х		SOUTHEAST DESERT AIR BASIN		
- Remainder of Plumas County		Х	Imperial County (portion) (4)	Х	
Remainder of Air Basin		Х	Remainder of Air Basin		Х
NORTH CENTRAL COAST AIR BASIN		Х			
NORTH COAST AIR BASIN		Х			
NORTHEAST PLATEAU AIR BASIN		Х			
SACRAMENTO VALLEY AIR BASIN					
Sacramento Metro Area (1)	Х				
Sutter County		Х			
Yuba County (portion)		Х			
Remainder of Air Basin		Х			

\* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305. This map reflects the 2006 24-hour PM2.5 standard as well as the 1997 and 2012 PM2.5 annual standards.

(1) For this purpose, Sacramento Metro Area comprises all of Sacramento and portions of El Dorado, Placer, Solano, and Yolo Counties. Air quality in this area meets the national PM2.5 standards. A Determination of Attainment for the 2006 24-hour PM2.5 standard was made by U.S. EPA in June 2017.

(2) Air quality in this area meets the national PM2.5 standards. A Determination of Attainment for the 2006 24-hour PM2.5 standard was made by U.S. EPA in June 2017.

(3) Those lands of the Santa Rosa Band of Cahulla Mission Indians in Riverside County are designated Unclassifiable/Attainment.

(4) That portion of Imperial County encompassing the urban and surrounding areas of Brawley, Calexico, El Centro, Heber, Holtville, Imperial, Seeley, and Westmorland. Air quality in this area meets the national PM2.5 standards. A Determination of Attainment for the 2006 24-hour PM2.5 standard was made by U.S. EPA in June 2017.



Source Date: October 2018 Air Quality Planning and Science Division

# TABLE 14

# National Ambient Air Quality Standards Area Designations for Carbon Monoxide\*

	Ν	U/A		Ν	U/A
GREAT BASIN VALLEYS AIR BASIN		Х	SACRAMENTO VALLEY AIR BASIN		Х
LAKE COUNTY AIR BASIN		Х	SAN DIEGO COUNTY		Х
LAKE TAHOE AIR BASIN		Х	SAN FRANCISCO BAY AREA AIR BASIN		Х
MOUNTAIN COUNTIES AIR BASIN		Х	SAN JOAQUIN VALLEY AIR BASIN		Х
NORTH CENTRAL COAST AIR BASIN		Х	SOUTH CENTRAL COAST AIR BASIN		Х
NORTH COAST AIR BASIN		Х	SOUTH COAST AIR BASIN		Х
NORTHEAST PLATEAU AIR BASIN		х	SOUTHEAST DESERT AIR BASIN		х

\* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.



Source Date: October 2018 Air Quality Planning and Science Division

# TABLE 15

# National Ambient Air Quality Standards Area Designations for Nitrogen Dioxide\*

	Ν	U/A		Ν	U/A
GREAT BASIN VALLEYS AIR BASIN		Х	SACRAMENTO VALLEY AIR BASIN		Х
LAKE COUNTY AIR BASIN		Х	SAN DIEGO COUNTY		Х
LAKE TAHOE AIR BASIN		Х	SAN FRANCISCO BAY AREA AIR BASIN		Х
MOUNTAIN COUNTIES AIR BASIN		Х	SAN JOAQUIN VALLEY AIR BASIN		Х
NORTH CENTRAL COAST AIR BASIN		Х	SOUTH CENTRAL COAST AIR BASIN		Х
NORTH COAST AIR BASIN		Х	SOUTH COAST AIR BASIN		Х
NORTHEAST PLATEAU AIR BASIN		х	SOUTHEAST DESERT AIR BASIN		х

\* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.



Source Date: October 2018 Air Quality Planning and Science Division

# TABLE 16

# National Ambient Air Quality Standards Area Designations for Sulfur Dioxide\*

	Ν	U/A		Ν	U/A
GREAT BASIN VALLEYS AIR BASIN		Х	SOUTH CENTRAL COAST AIR BASIN		
LAKE COUNTY AIR BASIN		Х	San Luis Obispo County		Х
LAKE TAHOE AIR BASIN		х	Santa Barbara County		х
MOUNTAIN COUNTIES AIR BASIN		х	Ventura County		х
NORTH CENTRAL COAST AIR BASIN		х	Channel Islands (1)		х
NORTH COAST AIR BASIN		Х	SOUTH COAST AIR BASIN		Х
NORTHEAST PLATEAU AIR BASIN		х	SOUTHEAST DESERT AIR BASIN		
SACRAMENTO VALLEY AIR BASIN		Х	Imperial County		Х
SAN DIEGO COUNTY		х	Remainder of Air Basin		Х
SAN FRANCISCO BAY AREA AIR BASIN		х			
SAN JOAQUIN VALLEY AIR BASIN					
Fresno County		х			
Kern County (portion)		х			
Kings County		х			
Madera County		х			
Merced County		х			
San Joaquin County		х			
Stanislaus County		х			
Tulare County		х			

\* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.

NOTE: This map and table reflect the 2010 1-hour  $SO_2$  standard of 75 ppb.

(1) South Central Coast Air Basin Channel Islands:

Santa Barbara County includes Santa Cruz, San Miguel, Santa Rosa, and Santa Barbara Islands.

Ventura County includes Anacapa and San Nicolas Islands.

Note that the San Clemente and Santa Catalina Islands are considered part of Los Angeles County, and therefore, are included as part of the South Coast Air Basin.



Source Date: October 2018 Air Quality Planning and Science Division

# TABLE 17

# National Ambient Air Quality Standards Area Designations for Lead (particulate)

	Ν	U/A		Ν	U/A
GREAT BASIN VALLEYS AIR BASIN		Х	SAN DIEGO COUNTY		Х
LAKE COUNTY AIR BASIN		Х	SAN FRANCISCO BAY AREA AIR BASIN		Х
LAKE TAHOE AIR BASIN		Х	SAN JOAQUIN VALLEY AIR BASIN		Х
MOUNTAIN COUNTIES AIR BASIN		Х	SOUTH CENTRAL COAST AIR BASIN		Х
NORTH CENTRAL COAST AIR BASIN		Х	SOUTH COAST AIR BASIN		
NORTH COAST AIR BASIN		Х	Los Angeles County (portion) (1)	Х	
NORTHEAST PLATEAU AIR BASIN		Х	Remainder of Air Basin		Х
SACRAMENTO VALLEY AIR BASIN		Х	SOUTHEAST DESERT AIR BASIN		Х

(1) Portion of County in Air Basin, not including Channel Islands

This page intentionally left blank



APPENDIX 3.1:

# CALEEMOD PROJECT CONSTRUCTION EMISSIONS MODEL OUTPUTS



#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

### Muranaka Warehouse (Construction - Unmitigated)

Riverside-South Coast County, Summer

# **1.0 Project Characteristics**

#### 1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Unrefrigerated Warehouse-No Rail	239.31	1000sqft	5.49	239,308.00	0
Other Asphalt Surfaces	302.82	1000sqft	6.95	302,815.00	0
Parking Lot	141.00	Space	0.96	41,610.00	0
City Park	1.80	Acre	1.80	78,380.00	0

#### **1.2 Other Project Characteristics**

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023
Utility Company	Southern California Edisor	1			
CO2 Intensity (Ib/MWhr)	390.98	CH4 Intensity (Ib/MWhr)	0.033	N2O Intensity (Ib/MWhr)	0.004

#### 1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project Area is 15.2 acres

Construction Phase - Construction anticipated to be completed in 2023

Off-road Equipment - Hours are based on an 8-hour workday

Off-road Equipment - Hours are based on an 8-hour workday

Off-road Equipment - Crawler Tractors used in lieu of Tractors/Loaders/Backhoes

Off-road Equipment -

Off-road Equipment - Crawler Tractors used in lieu of Tractors/Loaders/Backhoes

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Trips and VMT - Vendor Trips adjusted based on CalEEMod defaults for Building Construction and number of days for Site Preparation, Grading, Building Construction, Paving, & Architectural Coating

Grading - Analysis conservatively assumes that up to 5 acres can be disturbed per day

Architectural Coating - Rule 1113

Vehicle Trips - Construction run only

Energy Use - Construction run only

Water And Wastewater - Construction run only

Solid Waste - Construction run only

Construction Off-road Equipment Mitigation - Rule 403

Table Name	Column Name	Default Value	New Value
tblArchitecturalCoating	EF_Nonresidential_Exterior	100.00	50.00
tblConstructionPhase	NumDays	20.00	40.00
tblConstructionPhase	PhaseEndDate	7/21/2023	8/18/2023
tblEnergyUse	LightingElect	0.35	0.00
tblEnergyUse	LightingElect	1.17	0.00
tblEnergyUse	NT24E	0.82	0.00
tblEnergyUse	NT24NG	0.03	0.00
tblEnergyUse	T24E	0.33	0.00
tblEnergyUse	T24NG	1.98	0.00
tblGrading	AcresOfGrading	120.00	150.00
tblGrading	AcresOfGrading	35.00	50.00
tblGrading	MaterialImported	0.00	4,000.00
tblLandUse	LandUseSquareFeet	56,400.00	41,610.00
tblLandUse	LandUseSquareFeet	78,364.44	78,380.00
tblLandUse	LotAcreage	1.27	0.96
tblOffRoadEquipment	LoadFactor	0.43	0.43
tblOffRoadEquipment	LoadFactor	0.43	0.43
tblOffRoadEquipment	OffRoadEquipmentType		Crawler Tractors
tblOffRoadEquipment	OffRoadEquipmentType		Crawler Tractors

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	4.00	0.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblSolidWaste	SolidWasteGenerationRate	0.15	0.00
tblSolidWaste	SolidWasteGenerationRate	224.95	0.00
tblTripsAndVMT	VendorTripNumber	0.00	3.00
tblTripsAndVMT	VendorTripNumber	0.00	8.00
tblTripsAndVMT	VendorTripNumber	109.00	82.00
tblTripsAndVMT	VendorTripNumber	0.00	5.00
tblTripsAndVMT	VendorTripNumber	0.00	11.00
tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips	CC_TTP	48.00	0.00
tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips	CNW_TTP	19.00	0.00
tblVehicleTrips	CNW_TTP	41.00	0.00
tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips	CW_TTP	33.00	0.00
tblVehicleTrips	CW_TTP	59.00	0.00

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	DV_TP	28.00	0.00
tblVehicleTrips	DV_TP	5.00	0.00
tblVehicleTrips	PB_TP	6.00	0.00
tblVehicleTrips	PB_TP	3.00	0.00
tblVehicleTrips	PR_TP	66.00	0.00
tblVehicleTrips	PR_TP	92.00	0.00
tblVehicleTrips	ST_TR	1.96	0.00
tblVehicleTrips	ST_TR	1.74	0.00
tblVehicleTrips	SU_TR	2.19	0.00
tblVehicleTrips	SU_TR	1.74	0.00
tblVehicleTrips	WD_TR	0.78	0.00
tblVehicleTrips	WD_TR	1.74	0.00
tblWater	IndoorWaterUseRate	55,340,437.50	0.00
tblWater	OutdoorWaterUseRate	2,144,666.43	0.00

# 2.0 Emissions Summary

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/c	lay		
2022	4.5493	50.5181	30.5706	0.0846	23.5892	2.1593	25.7484	10.5621	1.9866	12.5487	0.0000	8,306.078 2	8,306.078 2	2.2595	0.3053	8,418.891 0
2023	51.3943	18.7443	28.6118	0.0705	3.6326	0.7860	4.4186	0.9753	0.7386	1.7140	0.0000	7,054.620 1	7,054.620 1	0.7464	0.2897	7,159.614 2
Maximum	51.3943	50.5181	30.5706	0.0846	23.5892	2.1593	25.7484	10.5621	1.9866	12.5487	0.0000	8,306.078 2	8,306.078 2	2.2595	0.3053	8,418.891 0

#### Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/c	lay		
2022	4.5493	50.5181	30.5706	0.0846	9.3342	2.1593	11.4935	4.1552	1.9866	6.1417	0.0000	8,306.078 2	8,306.078 2	2.2595	0.3053	8,418.891 0
2023	51.3943	18.7443	28.6118	0.0705	3.6326	0.7860	4.4186	0.9753	0.7386	1.7140	0.0000	7,054.620 1	7,054.620 1	0.7464	0.2897	7,159.614 2
Maximum	51.3943	50.5181	30.5706	0.0846	9.3342	2.1593	11.4935	4.1552	1.9866	6.1417	0.0000	8,306.078 2	8,306.078 2	2.2595	0.3053	8,418.891 0

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	52.37	0.00	47.25	55.53	0.00	44.92	0.00	0.00	0.00	0.00	0.00	0.00

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 2.2 Overall Operational

#### Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/d	day		
Area	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597
Energy	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Mobile	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total	5.5048	6.4000e- 004	0.0699	1.0000e- 005	0.0000	2.5000e- 004	2.5000e- 004	0.0000	2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004	0.0000	0.1597

#### Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Area	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597
Energy	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	       	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Mobile	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total	5.5048	6.4000e- 004	0.0699	1.0000e- 005	0.0000	2.5000e- 004	2.5000e- 004	0.0000	2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004	0.0000	0.1597

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

# **3.0 Construction Detail**

#### **Construction Phase**

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Site Preparation	Site Preparation	2/7/2022	2/18/2022	5	10	
2	Grading	Grading	2/19/2022	4/1/2022	5	30	
3	Building Construction	Building Construction	4/2/2022	5/26/2023	5	300	
4	Paving	Paving	5/27/2023	6/23/2023	5	20	
5	Architectural Coating	Architectural Coating	6/24/2023	8/18/2023	5	40	

Acres of Grading (Site Preparation Phase): 50

Acres of Grading (Grading Phase): 150

Acres of Paving: 7.91

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 358,962; Non-Residential Outdoor: 119,654; Striped Parking Area: 20,665 (Architectural Coating – sqft)

#### OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Site Preparation	Crawler Tractors	4	8.00	212	0.43
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	0	8.00	97	0.37
Grading	Crawler Tractors	2	8.00	212	0.43
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	0	8.00	97	0.37
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	8.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	8.00	78	0.48

#### Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Site Preparation	7	18.00	3.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	8.00	500.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	278.00	82.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	5.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	56.00	11.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

# **3.1 Mitigation Measures Construction**

Water Exposed Area

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.2 Site Preparation - 2022

# **Unmitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Fugitive Dust					23.3688	0.0000	23.3688	10.5032	0.0000	10.5032			0.0000			0.0000
Off-Road	4.4735	50.3453	19.9794	0.0569		2.1564	2.1564		1.9839	1.9839		5,508.762 6	5,508.762 6	1.7817		5,553.303 7
Total	4.4735	50.3453	19.9794	0.0569	23.3688	2.1564	25.5252	10.5032	1.9839	12.4871		5,508.762 6	5,508.762 6	1.7817		5,553.303 7

#### Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	4.8800e- 003	0.1269	0.0441	5.5000e- 004	0.0192	1.8300e- 003	0.0210	5.5300e- 003	1.7500e- 003	7.2800e- 003		57.8836	57.8836	6.1000e- 004	8.5800e- 003	60.4569
Worker	0.0709	0.0460	0.7176	1.8300e- 003	0.2012	1.0000e- 003	0.2022	0.0534	9.2000e- 004	0.0543		186.0370	186.0370	4.6100e- 003	4.5800e- 003	187.5158
Total	0.0758	0.1728	0.7617	2.3800e- 003	0.2204	2.8300e- 003	0.2232	0.0589	2.6700e- 003	0.0616		243.9206	243.9206	5.2200e- 003	0.0132	247.9727

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.2 Site Preparation - 2022

### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	day		
Fugitive Dust					9.1138	0.0000	9.1138	4.0963	0.0000	4.0963			0.0000			0.0000
Off-Road	4.4735	50.3453	19.9794	0.0569		2.1564	2.1564		1.9839	1.9839	0.0000	5,508.762 6	5,508.762 6	1.7817		5,553.303 7
Total	4.4735	50.3453	19.9794	0.0569	9.1138	2.1564	11.2702	4.0963	1.9839	6.0802	0.0000	5,508.762 6	5,508.762 6	1.7817		5,553.303 7

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	4.8800e- 003	0.1269	0.0441	5.5000e- 004	0.0192	1.8300e- 003	0.0210	5.5300e- 003	1.7500e- 003	7.2800e- 003		57.8836	57.8836	6.1000e- 004	8.5800e- 003	60.4569
Worker	0.0709	0.0460	0.7176	1.8300e- 003	0.2012	1.0000e- 003	0.2022	0.0534	9.2000e- 004	0.0543		186.0370	186.0370	4.6100e- 003	4.5800e- 003	187.5158
Total	0.0758	0.1728	0.7617	2.3800e- 003	0.2204	2.8300e- 003	0.2232	0.0589	2.6700e- 003	0.0616		243.9206	243.9206	5.2200e- 003	0.0132	247.9727

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.3 Grading - 2022

**Unmitigated Construction On-Site** 

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Fugitive Dust					11.3415	0.0000	11.3415	3.8853	0.0000	3.8853			0.0000			0.0000
Off-Road	4.2765	47.4744	29.1823	0.0715		1.9068	1.9068		1.7543	1.7543		6,922.760 9	6,922.760 9	2.2390		6,978.734 9
Total	4.2765	47.4744	29.1823	0.0715	11.3415	1.9068	13.2483	3.8853	1.7543	5.6396		6,922.760 9	6,922.760 9	2.2390		6,978.734 9

#### Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0527	2.1286	0.4733	9.5800e- 003	0.2917	0.0247	0.3165	0.0800	0.0237	0.1037		1,022.253 2	1,022.253 2	0.0138	0.1610	1,070.586 8
Vendor	0.0130	0.3383	0.1176	1.4600e- 003	0.0512	4.8800e- 003	0.0561	0.0148	4.6700e- 003	0.0194		154.3563	154.3563	1.6300e- 003	0.0229	161.2184
Worker	0.0788	0.0511	0.7973	2.0300e- 003	0.2236	1.1100e- 003	0.2247	0.0593	1.0300e- 003	0.0603		206.7078	206.7078	5.1200e- 003	5.0800e- 003	208.3509
Total	0.1445	2.5179	1.3883	0.0131	0.5665	0.0307	0.5972	0.1540	0.0294	0.1834		1,383.317 3	1,383.317 3	0.0206	0.1890	1,440.156 1

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.3 Grading - 2022

### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Fugitive Dust					4.4232	0.0000	4.4232	1.5153	0.0000	1.5153			0.0000			0.0000
Off-Road	4.2765	47.4744	29.1823	0.0715		1.9068	1.9068		1.7543	1.7543	0.0000	6,922.760 9	6,922.760 9	2.2390		6,978.734 9
Total	4.2765	47.4744	29.1823	0.0715	4.4232	1.9068	6.3300	1.5153	1.7543	3.2695	0.0000	6,922.760 9	6,922.760 9	2.2390		6,978.734 9

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	day		
Hauling	0.0527	2.1286	0.4733	9.5800e- 003	0.2917	0.0247	0.3165	0.0800	0.0237	0.1037		1,022.253 2	1,022.253 2	0.0138	0.1610	1,070.586 8
Vendor	0.0130	0.3383	0.1176	1.4600e- 003	0.0512	4.8800e- 003	0.0561	0.0148	4.6700e- 003	0.0194		154.3563	154.3563	1.6300e- 003	0.0229	161.2184
Worker	0.0788	0.0511	0.7973	2.0300e- 003	0.2236	1.1100e- 003	0.2247	0.0593	1.0300e- 003	0.0603		206.7078	206.7078	5.1200e- 003	5.0800e- 003	208.3509
Total	0.1445	2.5179	1.3883	0.0131	0.5665	0.0307	0.5972	0.1540	0.0294	0.1834		1,383.317 3	1,383.317 3	0.0206	0.1890	1,440.156 1

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.4 Building Construction - 2022

## Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	1.8146	16.7670	17.4392	0.0288		0.8645	0.8645		0.8122	0.8122		2,737.152 0	2,737.152 0	0.6711		2,753.928 8
Total	1.8146	16.7670	17.4392	0.0288		0.8645	0.8645		0.8122	0.8122		2,737.152 0	2,737.152 0	0.6711		2,753.928 8

#### Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.1334	3.4675	1.2057	0.0149	0.5252	0.0500	0.5752	0.1512	0.0478	0.1991		1,582.151 8	1,582.151 8	0.0167	0.2346	1,652.489 0
Worker	1.0956	0.7100	11.0827	0.0282	3.1074	0.0155	3.1229	0.8241	0.0143	0.8384		2,873.238 8	2,873.238 8	0.0712	0.0707	2,896.077 1
Total	1.2290	4.1774	12.2883	0.0432	3.6326	0.0655	3.6981	0.9753	0.0621	1.0374		4,455.390 5	4,455.390 5	0.0879	0.3053	4,548.566 1

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.4 Building Construction - 2022

#### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	1.8146	16.7670	17.4392	0.0288		0.8645	0.8645		0.8122	0.8122	0.0000	2,737.152 0	2,737.152 0	0.6711		2,753.928 8
Total	1.8146	16.7670	17.4392	0.0288		0.8645	0.8645		0.8122	0.8122	0.0000	2,737.152 0	2,737.152 0	0.6711		2,753.928 8

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.1334	3.4675	1.2057	0.0149	0.5252	0.0500	0.5752	0.1512	0.0478	0.1991		1,582.151 8	1,582.151 8	0.0167	0.2346	1,652.489 0
Worker	1.0956	0.7100	11.0827	0.0282	3.1074	0.0155	3.1229	0.8241	0.0143	0.8384		2,873.238 8	2,873.238 8	0.0712	0.0707	2,896.077 1
Total	1.2290	4.1774	12.2883	0.0432	3.6326	0.0655	3.6981	0.9753	0.0621	1.0374		4,455.390 5	4,455.390 5	0.0879	0.3053	4,548.566 1

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.4 Building Construction - 2023

#### Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Off-Road	1.6735	15.4377	17.3101	0.0288		0.7481	0.7481	- 	0.7029	0.7029		2,738.153 5	2,738.153 5	0.6670		2,754.828 8
Total	1.6735	15.4377	17.3101	0.0288		0.7481	0.7481		0.7029	0.7029		2,738.153 5	2,738.153 5	0.6670		2,754.828 8

#### Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0924	2.6790	1.1031	0.0143	0.5252	0.0233	0.5485	0.1512	0.0223	0.1735		1,519.222 2	1,519.222 2	0.0155	0.2245	1,586.509 2
Worker	1.0157	0.6276	10.1987	0.0273	3.1074	0.0146	3.1220	0.8241	0.0134	0.8375		2,797.244 4	2,797.244 4	0.0639	0.0652	2,818.276 2
Total	1.1081	3.3066	11.3017	0.0417	3.6326	0.0379	3.6705	0.9753	0.0357	1.0111		4,316.466 6	4,316.466 6	0.0794	0.2897	4,404.785 4

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.4 Building Construction - 2023

#### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Off-Road	1.6735	15.4377	17.3101	0.0288		0.7481	0.7481		0.7029	0.7029	0.0000	2,738.153 5	2,738.153 5	0.6670		2,754.828 8
Total	1.6735	15.4377	17.3101	0.0288		0.7481	0.7481		0.7029	0.7029	0.0000	2,738.153 5	2,738.153 5	0.6670		2,754.828 8

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0924	2.6790	1.1031	0.0143	0.5252	0.0233	0.5485	0.1512	0.0223	0.1735		1,519.222 2	1,519.222 2	0.0155	0.2245	1,586.509 2
Worker	1.0157	0.6276	10.1987	0.0273	3.1074	0.0146	3.1220	0.8241	0.0134	0.8375		2,797.244 4	2,797.244 4	0.0639	0.0652	2,818.276 2
Total	1.1081	3.3066	11.3017	0.0417	3.6326	0.0379	3.6705	0.9753	0.0357	1.0111		4,316.466 6	4,316.466 6	0.0794	0.2897	4,404.785 4

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.5 Paving - 2023

#### **Unmitigated Construction On-Site**

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.584 1	2,207.584 1	0.7140		2,225.433 6
Paving	1.0362					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.0690	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.584 1	2,207.584 1	0.7140		2,225.433 6

#### Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	5.6400e- 003	0.1634	0.0673	8.7000e- 004	0.0320	1.4200e- 003	0.0335	9.2200e- 003	1.3600e- 003	0.0106		92.6355	92.6355	9.4000e- 004	0.0137	96.7384
Worker	0.0548	0.0339	0.5503	1.4700e- 003	0.1677	7.9000e- 004	0.1685	0.0445	7.2000e- 004	0.0452		150.9305	150.9305	3.4500e- 003	3.5200e- 003	152.0653
Total	0.0604	0.1972	0.6176	2.3400e- 003	0.1997	2.2100e- 003	0.2019	0.0537	2.0800e- 003	0.0558		243.5660	243.5660	4.3900e- 003	0.0172	248.8036

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.5 Paving - 2023

#### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.584 1	2,207.584 1	0.7140		2,225.433 6
Paving	1.0362					0.0000	0.0000	1 1 1 1 1	0.0000	0.0000		 - - - -	0.0000			0.0000
Total	2.0690	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.584 1	2,207.584 1	0.7140		2,225.433 6

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	5.6400e- 003	0.1634	0.0673	8.7000e- 004	0.0320	1.4200e- 003	0.0335	9.2200e- 003	1.3600e- 003	0.0106		92.6355	92.6355	9.4000e- 004	0.0137	96.7384
Worker	0.0548	0.0339	0.5503	1.4700e- 003	0.1677	7.9000e- 004	0.1685	0.0445	7.2000e- 004	0.0452		150.9305	150.9305	3.4500e- 003	3.5200e- 003	152.0653
Total	0.0604	0.1972	0.6176	2.3400e- 003	0.1997	2.2100e- 003	0.2019	0.0537	2.0800e- 003	0.0558		243.5660	243.5660	4.3900e- 003	0.0172	248.8036

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 3.6 Architectural Coating - 2023

#### **Unmitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Archit. Coating	50.9217					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253
Total	51.1773	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253

#### Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0124	0.3594	0.1480	1.9200e- 003	0.0705	3.1300e- 003	0.0736	0.0203	2.9900e- 003	0.0233		203.7981	203.7981	2.0800e- 003	0.0301	212.8244
Worker	0.2046	0.1264	2.0544	5.5100e- 003	0.6260	2.9400e- 003	0.6289	0.1660	2.7000e- 003	0.1687		563.4737	563.4737	0.0129	0.0131	567.7103
Total	0.2170	0.4858	2.2024	7.4300e- 003	0.6964	6.0700e- 003	0.7025	0.1863	5.6900e- 003	0.1920		767.2718	767.2718	0.0150	0.0433	780.5347

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.6 Architectural Coating - 2023

### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	day		
Archit. Coating	50.9217					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253
Total	51.1773	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0124	0.3594	0.1480	1.9200e- 003	0.0705	3.1300e- 003	0.0736	0.0203	2.9900e- 003	0.0233		203.7981	203.7981	2.0800e- 003	0.0301	212.8244
Worker	0.2046	0.1264	2.0544	5.5100e- 003	0.6260	2.9400e- 003	0.6289	0.1660	2.7000e- 003	0.1687		563.4737	563.4737	0.0129	0.0131	567.7103
Total	0.2170	0.4858	2.2024	7.4300e- 003	0.6964	6.0700e- 003	0.7025	0.1863	5.6900e- 003	0.1920		767.2718	767.2718	0.0150	0.0433	780.5347

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 4.0 Operational Detail - Mobile

## 4.1 Mitigation Measures Mobile

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/d	day		
Mitigated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unmitigated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

### 4.2 Trip Summary Information

	Ave	age Daily Trip Ra	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
City Park	0.00	0.00	0.00		
Other Asphalt Surfaces	0.00	0.00	0.00		
Parking Lot	0.00	0.00	0.00		
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00		
Total	0.00	0.00	0.00		

## 4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
City Park	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Unrefrigerated Warehouse-No	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0

#### 4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
City Park	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Other Asphalt Surfaces	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Unrefrigerated Warehouse-No Rail	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468

# 5.0 Energy Detail

Historical Energy Use: N

## 5.1 Mitigation Measures Energy

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
NaturalGas Mitigated	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
NaturalGas Unmitigated	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	 , , ,	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 5.2 Energy by Land Use - NaturalGas

#### **Unmitigated**

	NaturalGa s Use	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/c	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unrefrigerated Warehouse-No Rail	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 5.2 Energy by Land Use - NaturalGas

### Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/o	day							lb/c	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unrefrigerated Warehouse-No Rail	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

## 6.0 Area Detail

6.1 Mitigation Measures Area

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Mitigated	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597
Unmitigated	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597

## 6.2 Area by SubCategory

#### **Unmitigated**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	lay		
Architectural Coating	0.6340					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	4.8643					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	6.4800e- 003	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597
Total	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 6.2 Area by SubCategory

### Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/c	lay		
Architectural Coating	0.6340					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	4.8643					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	6.4800e- 003	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597
Total	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597

## 7.0 Water Detail

7.1 Mitigation Measures Water

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

#### 8.0 Waste Detail

#### 8.1 Mitigation Measures Waste

### 9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

## **10.0 Stationary Equipment**

#### Fire Pumps and Emergency Generators

Equipment Type North Street Lieure North Street		
Equipment Type Number Hours/Day Hours/Year Horse Power	Load Factor	Fuel Type

#### **Boilers**

Equipment Type Number Heat Input/Day Heat Input/Year Boiler Rating	Fuel Type
--	-----------

#### **User Defined Equipment**

Equipment Type

Number

## **11.0 Vegetation**

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

#### Muranaka Warehouse (Construction - Unmitigated)

Riverside-South Coast County, Winter

## **1.0 Project Characteristics**

#### 1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Unrefrigerated Warehouse-No Rail	239.31	1000sqft	5.49	239,308.00	0
Other Asphalt Surfaces	302.82	1000sqft	6.95	302,815.00	0
Parking Lot	141.00	Space	0.96	41,610.00	0
City Park	1.80	Acre	1.80	78,380.00	0

#### **1.2 Other Project Characteristics**

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023
Utility Company	Southern California Edisor	1			
CO2 Intensity (Ib/MWhr)	390.98	CH4 Intensity (Ib/MWhr)	0.033	N2O Intensity (Ib/MWhr)	0.004

### 1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project Area is 15.2 acres

Construction Phase - Construction anticipated to be completed in 2023

Off-road Equipment - Hours are based on an 8-hour workday

Off-road Equipment - Hours are based on an 8-hour workday

Off-road Equipment - Crawler Tractors used in lieu of Tractors/Loaders/Backhoes

Off-road Equipment -

Off-road Equipment - Crawler Tractors used in lieu of Tractors/Loaders/Backhoes

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Trips and VMT - Vendor Trips adjusted based on CalEEMod defaults for Building Construction and number of days for Site Preparation, Grading, Building Construction, Paving, & Architectural Coating

Grading - Analysis conservatively assumes that up to 5 acres can be disturbed per day

Architectural Coating - Rule 1113

Vehicle Trips - Construction run only

Energy Use - Construction run only

Water And Wastewater - Construction run only

Solid Waste - Construction run only

Construction Off-road Equipment Mitigation - Rule 403

Table Name	Column Name	Default Value	New Value
tblArchitecturalCoating	EF_Nonresidential_Exterior	100.00	50.00
tblConstructionPhase	NumDays	20.00	40.00
tblConstructionPhase	PhaseEndDate	7/21/2023	8/18/2023
tblEnergyUse	LightingElect	0.35	0.00
tblEnergyUse	LightingElect	1.17	0.00
tblEnergyUse	NT24E	0.82	0.00
tblEnergyUse	NT24NG	0.03	0.00
tblEnergyUse	T24E	0.33	0.00
tblEnergyUse	T24NG	1.98	0.00
tblGrading	AcresOfGrading	120.00	150.00
tblGrading	AcresOfGrading	35.00	50.00
tblGrading	MaterialImported	0.00	4,000.00
tblLandUse	LandUseSquareFeet	56,400.00	41,610.00
tblLandUse	LandUseSquareFeet	78,364.44	78,380.00
tblLandUse	LotAcreage	1.27	0.96
tblOffRoadEquipment	LoadFactor	0.43	0.43
tblOffRoadEquipment	LoadFactor	0.43	0.43
tblOffRoadEquipment	OffRoadEquipmentType		Crawler Tractors
tblOffRoadEquipment	OffRoadEquipmentType		Crawler Tractors

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	4.00	0.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblSolidWaste	SolidWasteGenerationRate	0.15	0.00
tblSolidWaste	SolidWasteGenerationRate	224.95	0.00
tblTripsAndVMT	VendorTripNumber	0.00	3.00
tblTripsAndVMT	VendorTripNumber	0.00	8.00
tblTripsAndVMT	VendorTripNumber	109.00	82.00
tblTripsAndVMT	VendorTripNumber	0.00	5.00
tblTripsAndVMT	VendorTripNumber	0.00	11.00
tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips	CC_TL	8.40	0.00
tblVehicleTrips	CC_TTP	48.00	0.00
tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips	CNW_TL	6.90	0.00
tblVehicleTrips	CNW_TTP	19.00	0.00
tblVehicleTrips	CNW_TTP	41.00	0.00
tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips	CW_TL	16.60	0.00
tblVehicleTrips	CW_TTP	33.00	0.00
tblVehicleTrips	CW_TTP	59.00	0.00
		•	

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	DV_TP	28.00	0.00
tblVehicleTrips	DV_TP	5.00	0.00
tblVehicleTrips	PB_TP	6.00	0.00
tblVehicleTrips	PB_TP	3.00	0.00
tblVehicleTrips	PR_TP	66.00	0.00
tblVehicleTrips	PR_TP	92.00	0.00
tblVehicleTrips	ST_TR	1.96	0.00
tblVehicleTrips	ST_TR	1.74	0.00
tblVehicleTrips	SU_TR	2.19	0.00
tblVehicleTrips	SU_TR	1.74	0.00
tblVehicleTrips	WD_TR	0.78	0.00
tblVehicleTrips	WD_TR	1.74	0.00
tblWater	IndoorWaterUseRate	55,340,437.50	0.00
tblWater	OutdoorWaterUseRate	2,144,666.43	0.00

## 2.0 Emissions Summary

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/o	day							lb/c	lay		
2022	4.5444	50.5267	30.4370	0.0844	23.5892	2.1593	25.7484	10.5621	1.9866	12.5487	0.0000	8,287.553 9	8,287.553 9	2.2594	0.3074	8,400.447 9
2023	51.3805	18.9300	26.7318	0.0680	3.6326	0.7861	4.4187	0.9753	0.7387	1.7140	0.0000	6,795.700 8	6,795.700 8	0.7459	0.2920	6,901.360 5
Maximum	51.3805	50.5267	30.4370	0.0844	23.5892	2.1593	25.7484	10.5621	1.9866	12.5487	0.0000	8,287.553 9	8,287.553 9	2.2594	0.3074	8,400.447 9

#### Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/c	lay		
2022	4.5444	50.5267	30.4370	0.0844	9.3342	2.1593	11.4935	4.1552	1.9866	6.1417	0.0000	8,287.553 9	8,287.553 9	2.2594	0.3074	8,400.447 9
2023	51.3805	18.9300	26.7318	0.0680	3.6326	0.7861	4.4187	0.9753	0.7387	1.7140	0.0000	6,795.700 8	6,795.700 8	0.7459	0.2920	6,901.360 5
Maximum	51.3805	50.5267	30.4370	0.0844	9.3342	2.1593	11.4935	4.1552	1.9866	6.1417	0.0000	8,287.553 9	8,287.553 9	2.2594	0.3074	8,400.447 9

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	52.37	0.00	47.25	55.53	0.00	44.92	0.00	0.00	0.00	0.00	0.00	0.00

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 2.2 Overall Operational

#### Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	lay		
Area	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597
Energy	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Mobile	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total	5.5048	6.4000e- 004	0.0699	1.0000e- 005	0.0000	2.5000e- 004	2.5000e- 004	0.0000	2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004	0.0000	0.1597

#### Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Area	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597
Energy	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Mobile	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total	5.5048	6.4000e- 004	0.0699	1.0000e- 005	0.0000	2.5000e- 004	2.5000e- 004	0.0000	2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004	0.0000	0.1597

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

## **3.0 Construction Detail**

#### **Construction Phase**

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Site Preparation	Site Preparation	2/7/2022	2/18/2022	5	10	
2	Grading	Grading	2/19/2022	4/1/2022	5	30	
3	Building Construction	Building Construction	4/2/2022	5/26/2023	5	300	
4	Paving	Paving	5/27/2023	6/23/2023	5	20	
5	Architectural Coating	Architectural Coating	6/24/2023	8/18/2023	5	40	

Acres of Grading (Site Preparation Phase): 50

Acres of Grading (Grading Phase): 150

Acres of Paving: 7.91

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 358,962; Non-Residential Outdoor: 119,654; Striped Parking Area: 20,665 (Architectural Coating – sqft)

#### OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Site Preparation	Crawler Tractors	4	8.00	212	0.43
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	0	8.00	97	0.37
Grading	Crawler Tractors	2	8.00	212	0.43
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	0	8.00	97	0.37
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	8.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	8.00	78	0.48

#### Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Site Preparation	7	18.00	3.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	8.00	500.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	278.00	82.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	5.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	56.00	11.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

## **3.1 Mitigation Measures Construction**

Water Exposed Area

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.2 Site Preparation - 2022

### **Unmitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Fugitive Dust					23.3688	0.0000	23.3688	10.5032	0.0000	10.5032			0.0000			0.0000
Off-Road	4.4735	50.3453	19.9794	0.0569		2.1564	2.1564		1.9839	1.9839		5,508.762 6	5,508.762 6	1.7817		5,553.303 7
Total	4.4735	50.3453	19.9794	0.0569	23.3688	2.1564	25.5252	10.5032	1.9839	12.4871		5,508.762 6	5,508.762 6	1.7817		5,553.303 7

#### Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	4.6700e- 003	0.1337	0.0458	5.5000e- 004	0.0192	1.8300e- 003	0.0211	5.5300e- 003	1.7500e- 003	7.2900e- 003		57.9467	57.9467	6.0000e- 004	8.6000e- 003	60.5246
Worker	0.0663	0.0477	0.5816	1.6600e- 003	0.2012	1.0000e- 003	0.2022	0.0534	9.2000e- 004	0.0543		168.5113	168.5113	4.5800e- 003	4.6800e- 003	170.0216
Total	0.0709	0.1814	0.6274	2.2100e- 003	0.2204	2.8300e- 003	0.2233	0.0589	2.6700e- 003	0.0616		226.4580	226.4580	5.1800e- 003	0.0133	230.5462

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.2 Site Preparation - 2022

#### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Fugitive Dust					9.1138	0.0000	9.1138	4.0963	0.0000	4.0963		- - - - -	0.0000			0.0000
Off-Road	4.4735	50.3453	19.9794	0.0569		2.1564	2.1564		1.9839	1.9839	0.0000	5,508.762 6	5,508.762 6	1.7817		5,553.303 7
Total	4.4735	50.3453	19.9794	0.0569	9.1138	2.1564	11.2702	4.0963	1.9839	6.0802	0.0000	5,508.762 6	5,508.762 6	1.7817		5,553.303 7

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	4.6700e- 003	0.1337	0.0458	5.5000e- 004	0.0192	1.8300e- 003	0.0211	5.5300e- 003	1.7500e- 003	7.2900e- 003		57.9467	57.9467	6.0000e- 004	8.6000e- 003	60.5246
Worker	0.0663	0.0477	0.5816	1.6600e- 003	0.2012	1.0000e- 003	0.2022	0.0534	9.2000e- 004	0.0543		168.5113	168.5113	4.5800e- 003	4.6800e- 003	170.0216
Total	0.0709	0.1814	0.6274	2.2100e- 003	0.2204	2.8300e- 003	0.2233	0.0589	2.6700e- 003	0.0616		226.4580	226.4580	5.1800e- 003	0.0133	230.5462

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.3 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Fugitive Dust					11.3415	0.0000	11.3415	3.8853	0.0000	3.8853			0.0000			0.0000
Off-Road	4.2765	47.4744	29.1823	0.0715		1.9068	1.9068		1.7543	1.7543		6,922.760 9	6,922.760 9	2.2390		6,978.734 9
Total	4.2765	47.4744	29.1823	0.0715	11.3415	1.9068	13.2483	3.8853	1.7543	5.6396		6,922.760 9	6,922.760 9	2.2390		6,978.734 9

#### **Unmitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	day		
Hauling	0.0502	2.2452	0.4863	9.5900e- 003	0.2917	0.0248	0.3165	0.0800	0.0237	0.1037		1,023.033 6	1,023.033 6	0.0137	0.1612	1,071.401 2
Vendor	0.0125	0.3564	0.1221	1.4600e- 003	0.0512	4.8900e- 003	0.0561	0.0148	4.6800e- 003	0.0194		154.5246	154.5246	1.6100e- 003	0.0229	161.3990
Worker	0.0736	0.0530	0.6462	1.8400e- 003	0.2236	1.1100e- 003	0.2247	0.0593	1.0300e- 003	0.0603		187.2348	187.2348	5.0800e- 003	5.2000e- 003	188.9129
Total	0.1363	2.6546	1.2547	0.0129	0.5665	0.0308	0.5973	0.1540	0.0294	0.1834		1,364.793 0	1,364.793 0	0.0204	0.1893	1,421.713 0

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.3 Grading - 2022

#### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Fugitive Dust					4.4232	0.0000	4.4232	1.5153	0.0000	1.5153			0.0000			0.0000
Off-Road	4.2765	47.4744	29.1823	0.0715		1.9068	1.9068		1.7543	1.7543	0.0000	6,922.760 9	6,922.760 9	2.2390		6,978.734 9
Total	4.2765	47.4744	29.1823	0.0715	4.4232	1.9068	6.3300	1.5153	1.7543	3.2695	0.0000	6,922.760 9	6,922.760 9	2.2390		6,978.734 9

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	day		
Hauling	0.0502	2.2452	0.4863	9.5900e- 003	0.2917	0.0248	0.3165	0.0800	0.0237	0.1037		1,023.033 6	1,023.033 6	0.0137	0.1612	1,071.401 2
Vendor	0.0125	0.3564	0.1221	1.4600e- 003	0.0512	4.8900e- 003	0.0561	0.0148	4.6800e- 003	0.0194		154.5246	154.5246	1.6100e- 003	0.0229	161.3990
Worker	0.0736	0.0530	0.6462	1.8400e- 003	0.2236	1.1100e- 003	0.2247	0.0593	1.0300e- 003	0.0603		187.2348	187.2348	5.0800e- 003	5.2000e- 003	188.9129
Total	0.1363	2.6546	1.2547	0.0129	0.5665	0.0308	0.5973	0.1540	0.0294	0.1834		1,364.793 0	1,364.793 0	0.0204	0.1893	1,421.713 0

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.4 Building Construction - 2022

### Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	1.8146	16.7670	17.4392	0.0288		0.8645	0.8645		0.8122	0.8122		2,737.152 0	2,737.152 0	0.6711		2,753.928 8
Total	1.8146	16.7670	17.4392	0.0288		0.8645	0.8645		0.8122	0.8122		2,737.152 0	2,737.152 0	0.6711		2,753.928 8

#### **Unmitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.1277	3.6530	1.2520	0.0149	0.5252	0.0501	0.5753	0.1512	0.0480	0.1992		1,583.877 3	1,583.877 3	0.0165	0.2351	1,654.339 3
Worker	1.0234	0.7370	8.9818	0.0256	3.1074	0.0155	3.1229	0.8241	0.0143	0.8384		2,602.563 2	2,602.563 2	0.0707	0.0723	2,625.888 8
Total	1.1512	4.3900	10.2337	0.0405	3.6326	0.0656	3.6982	0.9753	0.0622	1.0375		4,186.440 5	4,186.440 5	0.0872	0.3074	4,280.228 1

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.4 Building Construction - 2022

#### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	1.8146	16.7670	17.4392	0.0288		0.8645	0.8645		0.8122	0.8122	0.0000	2,737.152 0	2,737.152 0	0.6711		2,753.928 8
Total	1.8146	16.7670	17.4392	0.0288		0.8645	0.8645		0.8122	0.8122	0.0000	2,737.152 0	2,737.152 0	0.6711		2,753.928 8

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.1277	3.6530	1.2520	0.0149	0.5252	0.0501	0.5753	0.1512	0.0480	0.1992		1,583.877 3	1,583.877 3	0.0165	0.2351	1,654.339 3
Worker	1.0234	0.7370	8.9818	0.0256	3.1074	0.0155	3.1229	0.8241	0.0143	0.8384		2,602.563 2	2,602.563 2	0.0707	0.0723	2,625.888 8
Total	1.1512	4.3900	10.2337	0.0405	3.6326	0.0656	3.6982	0.9753	0.0622	1.0375		4,186.440 5	4,186.440 5	0.0872	0.3074	4,280.228 1

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.4 Building Construction - 2023

### **Unmitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Off-Road	1.6735	15.4377	17.3101	0.0288		0.7481	0.7481	- 	0.7029	0.7029		2,738.153 5	2,738.153 5	0.6670		2,754.828 8
Total	1.6735	15.4377	17.3101	0.0288		0.7481	0.7481		0.7029	0.7029		2,738.153 5	2,738.153 5	0.6670		2,754.828 8

#### Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0856	2.8411	1.1402	0.0144	0.5252	0.0234	0.5486	0.1512	0.0224	0.1736		1,522.992 6	1,522.992 6	0.0152	0.2252	1,590.494 7
Worker	0.9520	0.6512	8.2815	0.0248	3.1074	0.0146	3.1220	0.8241	0.0134	0.8375		2,534.554 7	2,534.554 7	0.0637	0.0668	2,556.037 0
Total	1.0376	3.4923	9.4217	0.0391	3.6326	0.0380	3.6706	0.9753	0.0358	1.0111		4,057.547 3	4,057.547 3	0.0789	0.2920	4,146.531 6

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.4 Building Construction - 2023

#### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Off-Road	1.6735	15.4377	17.3101	0.0288		0.7481	0.7481		0.7029	0.7029	0.0000	2,738.153 5	2,738.153 5	0.6670		2,754.828 8
Total	1.6735	15.4377	17.3101	0.0288		0.7481	0.7481		0.7029	0.7029	0.0000	2,738.153 5	2,738.153 5	0.6670		2,754.828 8

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0856	2.8411	1.1402	0.0144	0.5252	0.0234	0.5486	0.1512	0.0224	0.1736		1,522.992 6	1,522.992 6	0.0152	0.2252	1,590.494 7
Worker	0.9520	0.6512	8.2815	0.0248	3.1074	0.0146	3.1220	0.8241	0.0134	0.8375		2,534.554 7	2,534.554 7	0.0637	0.0668	2,556.037 0
Total	1.0376	3.4923	9.4217	0.0391	3.6326	0.0380	3.6706	0.9753	0.0358	1.0111		4,057.547 3	4,057.547 3	0.0789	0.2920	4,146.531 6

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.5 Paving - 2023

#### **Unmitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.584 1	2,207.584 1	0.7140		2,225.433 6
Paving	1.0362					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.0690	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.584 1	2,207.584 1	0.7140		2,225.433 6

#### Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	5.2200e- 003	0.1732	0.0695	8.8000e- 004	0.0320	1.4300e- 003	0.0335	9.2200e- 003	1.3700e- 003	0.0106		92.8654	92.8654	9.3000e- 004	0.0137	96.9814
Worker	0.0514	0.0351	0.4468	1.3400e- 003	0.1677	7.9000e- 004	0.1685	0.0445	7.2000e- 004	0.0452		136.7566	136.7566	3.4300e- 003	3.6000e- 003	137.9157
Total	0.0566	0.2084	0.5164	2.2200e- 003	0.1997	2.2200e- 003	0.2019	0.0537	2.0900e- 003	0.0558		229.6220	229.6220	4.3600e- 003	0.0173	234.8970

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.5 Paving - 2023

#### **Mitigated Construction On-Site**

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.584 1	2,207.584 1	0.7140		2,225.433 6
Paving	1.0362					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	2.0690	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.584 1	2,207.584 1	0.7140		2,225.433 6

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	5.2200e- 003	0.1732	0.0695	8.8000e- 004	0.0320	1.4300e- 003	0.0335	9.2200e- 003	1.3700e- 003	0.0106		92.8654	92.8654	9.3000e- 004	0.0137	96.9814
Worker	0.0514	0.0351	0.4468	1.3400e- 003	0.1677	7.9000e- 004	0.1685	0.0445	7.2000e- 004	0.0452		136.7566	136.7566	3.4300e- 003	3.6000e- 003	137.9157
Total	0.0566	0.2084	0.5164	2.2200e- 003	0.1997	2.2200e- 003	0.2019	0.0537	2.0900e- 003	0.0558		229.6220	229.6220	4.3600e- 003	0.0173	234.8970

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.6 Architectural Coating - 2023

### **Unmitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Archit. Coating	50.9217					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253
Total	51.1773	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253

#### Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0115	0.3811	0.1530	1.9300e- 003	0.0705	3.1400e- 003	0.0736	0.0203	3.0000e- 003	0.0233		204.3039	204.3039	2.0400e- 003	0.0302	213.3590
Worker	0.1918	0.1312	1.6682	4.9900e- 003	0.6260	2.9400e- 003	0.6289	0.1660	2.7000e- 003	0.1687		510.5578	510.5578	0.0128	0.0135	514.8851
Total	0.2033	0.5123	1.8212	6.9200e- 003	0.6964	6.0800e- 003	0.7025	0.1863	5.7000e- 003	0.1920		714.8617	714.8617	0.0149	0.0437	728.2442

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.6 Architectural Coating - 2023

#### **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Archit. Coating	50.9217					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253
Total	51.1773	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0115	0.3811	0.1530	1.9300e- 003	0.0705	3.1400e- 003	0.0736	0.0203	3.0000e- 003	0.0233		204.3039	204.3039	2.0400e- 003	0.0302	213.3590
Worker	0.1918	0.1312	1.6682	4.9900e- 003	0.6260	2.9400e- 003	0.6289	0.1660	2.7000e- 003	0.1687		510.5578	510.5578	0.0128	0.0135	514.8851
Total	0.2033	0.5123	1.8212	6.9200e- 003	0.6964	6.0800e- 003	0.7025	0.1863	5.7000e- 003	0.1920		714.8617	714.8617	0.0149	0.0437	728.2442

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 4.0 Operational Detail - Mobile

## 4.1 Mitigation Measures Mobile

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	day		
Mitigated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unmitigated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

### 4.2 Trip Summary Information

	Ave	age Daily Trip Ra	ite	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
City Park	0.00	0.00	0.00		
Other Asphalt Surfaces	0.00	0.00	0.00		
Parking Lot	0.00	0.00	0.00		
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00		
Total	0.00	0.00	0.00		

## 4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
City Park	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Unrefrigerated Warehouse-No	0.00	0.00	0.00	0.00	0.00	0.00	0	0	0

#### 4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
City Park	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Other Asphalt Surfaces	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Unrefrigerated Warehouse-No Rail	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468

# 5.0 Energy Detail

Historical Energy Use: N

### 5.1 Mitigation Measures Energy

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
NaturalGas Mitigated	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
NaturalGas Unmitigated	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	 , , ,	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 5.2 Energy by Land Use - NaturalGas

#### **Unmitigated**

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/c	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unrefrigerated Warehouse-No Rail	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 5.2 Energy by Land Use - NaturalGas

### Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/o	day							lb/c	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unrefrigerated Warehouse-No Rail	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000

## 6.0 Area Detail

6.1 Mitigation Measures Area

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	-				lb/e	day							lb/c	lay		
Mitigated	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597
Unmitigated	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597

## 6.2 Area by SubCategory

**Unmitigated** 

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/e	day							lb/d	day		
Architectural Coating	0.6340					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
	4.8643					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
J J J J J J J J J J J J J J J J J J J	6.4800e- 003	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597
Total	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 6.2 Area by SubCategory

### Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/e	day							lb/c	lay		
Architectural Coating	0.6340					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	4.8643					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	6.4800e- 003	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597
Total	5.5048	6.4000e- 004	0.0699	1.0000e- 005		2.5000e- 004	2.5000e- 004		2.5000e- 004	2.5000e- 004		0.1499	0.1499	3.9000e- 004		0.1597

## 7.0 Water Detail

7.1 Mitigation Measures Water

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

#### 8.0 Waste Detail

#### 8.1 Mitigation Measures Waste

## 9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

## **10.0 Stationary Equipment**

#### Fire Pumps and Emergency Generators

|--|

#### **Boilers**

Equipment type framework from the figure of the bond framework for the bond	Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
---	----------------	--------	----------------	-----------------	---------------	-----------

#### **User Defined Equipment**

Equipment Type

Number

## **11.0 Vegetation**

This page intentionally left blank



APPENDIX 3.2:

# CALEEMOD PROJECT OPERATIONAL EMISSIONS MODEL OUTPUTS



#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## Muranaka Warehouse (Operations)

Riverside-South Coast County, Summer

## **1.0 Project Characteristics**

#### 1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Unrefrigerated Warehouse-No Rail	239.31	1000sqft	5.49	239,308.00	0
User Defined Industrial	239.31	User Defined Unit	0.00	0.00	0
Other Asphalt Surfaces	302.82	1000sqft	6.95	302,815.00	0
Parking Lot	141.00	Space	0.96	41,610.00	0
City Park	1.80	Acre	1.80	78,380.00	0

#### **1.2 Other Project Characteristics**

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023
Utility Company	Southern California Edisor	ı			
CO2 Intensity (Ib/MWhr)	390.98	CH4 Intensity (Ib/MWhr)	0.033	N2O Intensity (Ib/MWhr)	0.004

#### 1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project Area is 15.2 acres

Construction Phase - Operations run only

Off-road Equipment - Operations run only

Vehicle Trips - Trip characteristics based on information provided in the Traffic Study

Operational Off-Road Equipment - Based on SCAQMD High Cube Warehouse Truck Trip Study White Paper Summary of Busniess Survey Results (2014)

Fleet Mix - Passenger Car Mix estimated based on the CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, & MCY). Truck Mix based on information in the Traffic Study

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Stationary Sources - Emergency Generators and Fire Pumps -

## Energy Mitigation - Implementation of CAP Measure R2-CE1

Table Name	Column Name	Default Value	New Value
tblConstructionPhase	NumDays	20.00	0.00
tblFleetMix	HHD	0.02	0.00
tblFleetMix	HHD	0.02	0.71
tblFleetMix	LDA	0.53	0.58
tblFleetMix	LDA	0.53	0.00
tblFleetMix	LDT1	0.06	0.06
tblFleetMix	LDT1	0.06	0.00
tblFleetMix	LDT2	0.17	0.19
tblFleetMix	LDT2	0.17	0.00
tblFleetMix	LHD1	0.03	0.00
tblFleetMix	LHD1	0.03	0.11
tblFleetMix	LHD2	7.3100e-003	0.00
tblFleetMix	LHD2	7.3100e-003	0.03
tblFleetMix	МСҮ	0.02	0.03
tblFleetMix	МСҮ	0.02	0.00
tblFleetMix	MDV	0.14	0.15
tblFleetMix	MDV	0.14	0.00
tblFleetMix	МН	5.4680e-003	0.00
tblFleetMix	МН	5.4680e-003	0.00
tblFleetMix	MHD	0.01	0.00
tblFleetMix	MHD	0.01	0.14
tblFleetMix	OBUS	6.1600e-004	0.00
tblFleetMix	OBUS	6.1600e-004	0.00
tblFleetMix	SBUS	1.1000e-003	0.00
tblFleetMix	SBUS	1.1000e-003	0.00
tblFleetMix	UBUS	3.1500e-004	0.00

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblFleetMix	UBUS	3.1500e-004	0.00
tblLandUse	LandUseSquareFeet	56,400.00	41,610.00
tblLandUse	LandUseSquareFeet	78,408.00	78,380.00
tblLandUse	LotAcreage	1.27	0.96
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	3.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00
tblOperationalOffRoadEquipment	OperDaysPerYear	260.00	365.00
tblOperationalOffRoadEquipment	OperFuelType	Diesel	CNG
tblOperationalOffRoadEquipment	OperHorsePower	97.00	200.00
tblOperationalOffRoadEquipment	OperHoursPerDay	8.00	4.00
tblOperationalOffRoadEquipment	OperOffRoadEquipmentNumber	0.00	1.00
tblStationaryGeneratorsPumpsUse	HorsePowerValue	0.00	238.00
tblStationaryGeneratorsPumpsUse	HoursPerDay	0.00	0.14
tblStationaryGeneratorsPumpsUse	HoursPerYear	0.00	50.00
tblStationaryGeneratorsPumpsUse	NumberOfEquipment	0.00	1.00
tblVehicleTrips	CC_TTP	48.00	0.00
tblVehicleTrips	CNW_TTP	19.00	0.00
tblVehicleTrips	CW_TL	16.60	40.00
tblVehicleTrips	CW_TTP	33.00	0.00
tblVehicleTrips	CW_TTP	0.00	100.00
tblVehicleTrips	DV_TP	28.00	0.00
tblVehicleTrips	PB_TP	6.00	0.00
tblVehicleTrips	PR_TP	66.00	0.00
tblVehicleTrips	PR_TP	0.00	100.00
tblVehicleTrips	ST_TR	1.96	0.00
tblVehicleTrips	ST_TR	1.74	1.75
tblVehicleTrips	ST_TR	0.00	0.38
tblVehicleTrips	SU_TR	2.19	0.00

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	SU_TR	1.74	1.75
tblVehicleTrips	SU_TR	0.00	0.38
tblVehicleTrips	WD_TR	0.78	0.00
tblVehicleTrips	WD_TR	1.74	1.75
tblVehicleTrips	WD_TR	0.00	0.38

# 2.0 Emissions Summary

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

# 2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/e	day							lb/c	lay		
2022	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

#### Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/e	day							lb/d	day		
2022	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 2.2 Overall Operational

## Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	day		
Area	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155
Energy	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605
Mobile	1.8312	15.1337	20.2094	0.1201	6.9657	0.1953	7.1610	1.8912	0.1862	2.0774		12,634.17 58	12,634.17 58	0.2813	1.4590	13,076.00 24
Offroad	0.1103	1.0361	0.7492	3.1700e- 003		0.0376	0.0376		0.0346	0.0346	0.0000	306.5451	306.5451	0.0991		309.0237
Stationary	0.0547	0.1528	0.1394	2.6000e- 004		8.0400e- 003	8.0400e- 003		8.0400e- 003	8.0400e- 003		27.9726	27.9726	3.9200e- 003		28.0707
Total	7.5175	16.4527	21.3009	0.1243	6.9657	0.2511	7.2168	1.8912	0.2390	2.1302	0.0000	13,123.93 49	13,123.93 49	0.3878	1.4619	13,569.27 28

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 2.2 Overall Operational

## **Mitigated Operational**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Area	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155
Energy	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605
Mobile	1.8312	15.1337	20.2094	0.1201	6.9657	0.1953	7.1610	1.8912	0.1862	2.0774		12,634.17 58	12,634.17 58	0.2813	1.4590	13,076.00 24
Offroad	0.1103	1.0361	0.7492	3.1700e- 003		0.0376	0.0376	       	0.0346	0.0346	0.0000	306.5451	306.5451	0.0991		309.0237
Stationary	0.0547	0.1528	0.1394	2.6000e- 004		8.0400e- 003	8.0400e- 003		8.0400e- 003	8.0400e- 003		27.9726	27.9726	3.9200e- 003		28.0707
Total	7.5175	16.4527	21.3009	0.1243	6.9657	0.2511	7.2168	1.8912	0.2390	2.1302	0.0000	13,123.93 49	13,123.93 49	0.3878	1.4619	13,569.27 28

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

# **3.0 Construction Detail**

#### **Construction Phase**

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	2/7/2022	2/6/2022	5	0	

#### Acres of Grading (Site Preparation Phase): 0

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Acres of Grading (Grading Phase): 0

#### Acres of Paving: 7.91

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

#### OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	0	8.00	81	0.73
Demolition	Excavators	0	8.00	158	0.38
Demolition	Rubber Tired Dozers	0	8.00	247	0.40

#### Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	0	0.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

**3.1 Mitigation Measures Construction** 

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.2 Demolition - 2022

## **Unmitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	day		
Off-Road	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

## Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.2 Demolition - 2022

## **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 4.1 Mitigation Measures Mobile

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	lay		
Mitigated	1.8312	15.1337	20.2094	0.1201	6.9657	0.1953	7.1610	1.8912	0.1862	2.0774		12,634.17 58	12,634.17 58	0.2813	1.4590	13,076.00 24
Unmitigated	1.8312	15.1337	20.2094	0.1201	6.9657	0.1953	7.1610	1.8912	0.1862	2.0774		12,634.17 58	12,634.17 58	0.2813	1.4590	13,076.00 24

## 4.2 Trip Summary Information

	Ave	rage Daily Trip Ra	ite	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
City Park	0.00	0.00	0.00		
Other Asphalt Surfaces	0.00	0.00	0.00		
Parking Lot	0.00	0.00	0.00		
Unrefrigerated Warehouse-No Rail	419.00	419.00	419.00	1,795,734	1,795,734
User Defined Industrial	91.01	91.01	91.01	1,325,089	1,325,089
Total	510.01	510.01	510.01	3,120,823	3,120,823

# 4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
City Park	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Other Asphalt Surfaces	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Parking Lot	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Unrefrigerated Warehouse-No	16.60	8.40	6.90	59.00	0.00	41.00	92	5	3

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
User Defined Industrial	40.00	8.40	6.90	100.00	0.00	0.00	100	0	0

#### 4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
City Park	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Other Asphalt Surfaces	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Unrefrigerated Warehouse-No Rail	0.576000	0.060300	0.185900	0.151900	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	0.025900	0.000000	0.000000
User Defined Industrial	0.000000	0.000000	0.000000	0.000000	0.112000	0.030800	0.142900	0.714300	0.000000	0.000000	0.000000	0.000000	0.000000

# 5.0 Energy Detail

Historical Energy Use: N

## 5.1 Mitigation Measures Energy

Percent of Electricity Use Generated with Renewable Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
NaturalGas Mitigated	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605
NaturalGas Unmitigated	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003	<b></b>	9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 5.2 Energy by Land Use - NaturalGas

## **Unmitigated**

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/o	day							lb/c	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unrefrigerated Warehouse-No Rail	1317.83	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 5.2 Energy by Land Use - NaturalGas

## Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unrefrigerated Warehouse-No Rail	1.31783	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605

# 6.0 Area Detail

6.1 Mitigation Measures Area

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	day		
Mitigated	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155
Unmitigated	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004	 - - -	3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155

# 6.2 Area by SubCategory

**Unmitigated** 

	ROG	NOx	со	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Architectural Coating	0.6340					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	4.8643					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	8.7400e- 003	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155
Total	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 6.2 Area by SubCategory

#### Mitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/e	day							lb/d	day		
Architectural Coating	0.6340					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	4.8643					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	8.7400e- 003	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155
Total	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155

# 7.0 Water Detail

7.1 Mitigation Measures Water

# 8.0 Waste Detail

## 8.1 Mitigation Measures Waste

# 9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
Tractors/Loaders/Backhoes	1	4.00	365	200	0.37	CNG

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

#### UnMitigated/Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Equipment Type					lb/d	lay							lb/d	day		
Tractors/Loaders/ Backhoes	0.1103	1.0361	0.7492	3.1700e- 003		0.0376	0.0376		0.0346	0.0346	0.0000	306.5451	306.5451	0.0991		309.0237
Total	0.1103	1.0361	0.7492	3.1700e- 003		0.0376	0.0376		0.0346	0.0346	0.0000	306.5451	306.5451	0.0991		309.0237

# **10.0 Stationary Equipment**

## Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
Fire Pump	1	0.14	50	238	0.73	Diesel

#### **Boilers**

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

#### **User Defined Equipment**

Equipment Type Number

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## **10.1 Stationary Sources**

## Unmitigated/Mitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Equipment Type					lb/o	day							lb/c	lay		
Fire Pump - Diesel (175 - 300 HP)	0.0547	0.1528	0.1394	2.6000e- 004		8.0400e- 003	8.0400e- 003		8.0400e- 003	8.0400e- 003		27.9726	27.9726	3.9200e- 003		28.0707
Total	0.0547	0.1528	0.1394	2.6000e- 004		8.0400e- 003	8.0400e- 003		8.0400e- 003	8.0400e- 003		27.9726	27.9726	3.9200e- 003		28.0707

# 11.0 Vegetation

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## Muranaka Warehouse (Operations)

**Riverside-South Coast County, Winter** 

## **1.0 Project Characteristics**

#### 1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Unrefrigerated Warehouse-No Rail	239.31	1000sqft	5.49	239,308.00	0
User Defined Industrial	239.31	User Defined Unit	0.00	0.00	0
Other Asphalt Surfaces	302.82	1000sqft	6.95	302,815.00	0
Parking Lot	141.00	Space	0.96	41,610.00	0
City Park	1.80	Acre	1.80	78,380.00	0

#### **1.2 Other Project Characteristics**

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023
Utility Company	Southern California Edisor	ı			
CO2 Intensity (Ib/MWhr)	390.98	CH4 Intensity (Ib/MWhr)	0.033	N2O Intensity (Ib/MWhr)	0.004

#### 1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project Area is 15.2 acres

Construction Phase - Operations run only

Off-road Equipment - Operations run only

Vehicle Trips - Trip characteristics based on information provided in the Traffic Study

Operational Off-Road Equipment - Based on SCAQMD High Cube Warehouse Truck Trip Study White Paper Summary of Busniess Survey Results (2014)

Fleet Mix - Passenger Car Mix estimated based on the CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, & MCY). Truck Mix based on information in the Traffic Study

#### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Stationary Sources - Emergency Generators and Fire Pumps -

## Energy Mitigation - Implementation of CAP Measure R2-CE1

Table Name	Column Name	Default Value	New Value	
tblConstructionPhase	NumDays	20.00	0.00	
tblFleetMix	HHD	0.02	0.00	
tblFleetMix	HHD	0.02	0.71	
tblFleetMix	LDA	0.53	0.58	
tblFleetMix	LDA	0.53	0.00	
tblFleetMix	LDT1	0.06	0.06	
tblFleetMix	LDT1	0.06	0.00	
tblFleetMix	LDT2	0.17	0.19	
tblFleetMix	LDT2	0.17	0.00	
tblFleetMix	LHD1	0.03	0.00	
tblFleetMix	LHD1	0.03	0.11	
tblFleetMix	LHD2	7.3100e-003	0.00	
tblFleetMix	LHD2	7.3100e-003	0.03	
tblFleetMix	MCY	0.02	0.03	
tblFleetMix	MCY	0.02	0.00	
tblFleetMix	MDV	0.14	0.15	
tblFleetMix	MDV	0.14	0.00	
tblFleetMix	МН	5.4680e-003	0.00	
tblFleetMix	МН	5.4680e-003	0.00	
tblFleetMix	MHD	0.01	0.00	
tblFleetMix	MHD	0.01	0.14	
tblFleetMix	OBUS	6.1600e-004	0.00	
tblFleetMix	OBUS	6.1600e-004	0.00	
tblFleetMix	SBUS	1.1000e-003	0.00	
tblFleetMix	SBUS	1.1000e-003	0.00	
tblFleetMix	UBUS	3.1500e-004	0.00	

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblFleetMix	UBUS	3.1500e-004	0.00
tblLandUse	LandUseSquareFeet	56,400.00	41,610.00
tblLandUse	LandUseSquareFeet	78,408.00	78,380.00
tblLandUse	LotAcreage	1.27	0.96
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	3.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00
tblOperationalOffRoadEquipment	OperDaysPerYear	260.00	365.00
tblOperationalOffRoadEquipment	OperFuelType	Diesel	CNG
tblOperationalOffRoadEquipment	OperHorsePower	97.00	200.00
tblOperationalOffRoadEquipment	OperHoursPerDay	8.00	4.00
tblOperationalOffRoadEquipment	OperOffRoadEquipmentNumber	0.00	1.00
tblStationaryGeneratorsPumpsUse	HorsePowerValue	0.00	238.00
tblStationaryGeneratorsPumpsUse	HoursPerDay	0.00	0.14
tblStationaryGeneratorsPumpsUse	HoursPerYear	0.00	50.00
tblStationaryGeneratorsPumpsUse	NumberOfEquipment	0.00	1.00
tblVehicleTrips	CC_TTP	48.00	0.00
tblVehicleTrips	CNW_TTP	19.00	0.00
tblVehicleTrips	CW_TL	16.60	40.00
tblVehicleTrips	CW_TTP	33.00	0.00
tblVehicleTrips	CW_TTP	0.00	100.00
tblVehicleTrips	DV_TP	28.00	0.00
tblVehicleTrips	PB_TP	6.00	0.00
tblVehicleTrips	PR_TP	66.00	0.00
tblVehicleTrips	PR_TP	0.00	100.00
tblVehicleTrips	ST_TR	1.96	0.00
tblVehicleTrips	ST_TR	1.74	1.75
tblVehicleTrips	ST_TR	0.00	0.38
tblVehicleTrips	SU_TR	2.19	0.00

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	SU_TR	1.74	1.75
tblVehicleTrips	SU_TR	0.00	0.38
tblVehicleTrips	WD_TR	0.78	0.00
tblVehicleTrips	WD_TR	1.74	1.75
tblVehicleTrips	WD_TR	0.00	0.38

# 2.0 Emissions Summary

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/e	day							lb/c	lay		
2022	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

#### Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/e	day							lb/c	day		
2022	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Maximum	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 2.2 Overall Operational

### Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	day		
Area	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155
Energy	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605
Mobile	1.6090	15.9822	18.0133	0.1172	6.9657	0.1954	7.1611	1.8912	0.1863	2.0775		12,334.07 61	12,334.07 61	0.2833	1.4642	12,777.48 66
Offroad	0.1103	1.0361	0.7492	3.1700e- 003		0.0376	0.0376		0.0346	0.0346	0.0000	306.5451	306.5451	0.0991		309.0237
Stationary	0.0547	0.1528	0.1394	2.6000e- 004		8.0400e- 003	8.0400e- 003		8.0400e- 003	8.0400e- 003		27.9726	27.9726	3.9200e- 003		28.0707
Total	7.2953	17.3012	19.1048	0.1214	6.9657	0.2512	7.2169	1.8912	0.2391	2.1303	0.0000	12,823.83 52	12,823.83 52	0.3899	1.4670	13,270.75 69

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 2.2 Overall Operational

## **Mitigated Operational**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/c	lay		
Area	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155
Energy	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605
Mobile	1.6090	15.9822	18.0133	0.1172	6.9657	0.1954	7.1611	1.8912	0.1863	2.0775		12,334.07 61	12,334.07 61	0.2833	1.4642	12,777.48 66
Offroad	0.1103	1.0361	0.7492	3.1700e- 003		0.0376	0.0376		0.0346	0.0346	0.0000	306.5451	306.5451	0.0991		309.0237
Stationary	0.0547	0.1528	0.1394	2.6000e- 004		8.0400e- 003	8.0400e- 003		8.0400e- 003	8.0400e- 003		27.9726	27.9726	3.9200e- 003		28.0707
Total	7.2953	17.3012	19.1048	0.1214	6.9657	0.2512	7.2169	1.8912	0.2391	2.1303	0.0000	12,823.83 52	12,823.83 52	0.3899	1.4670	13,270.75 69

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

# **3.0 Construction Detail**

#### **Construction Phase**

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	2/7/2022	2/6/2022	5	0	

#### Acres of Grading (Site Preparation Phase): 0

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Acres of Grading (Grading Phase): 0

#### Acres of Paving: 7.91

Residential Indoor: 0; Residential Outdoor: 0; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

#### OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	0	8.00	81	0.73
Demolition	Excavators	0	8.00	158	0.38
Demolition	Rubber Tired Dozers	0	8.00	247	0.40

## Trips and VMT

Phase Name	Offroad Equipment	Worker Trip	Vendor Trip	Hauling Trip	Worker Trip	Vendor Trip	Hauling Trip	Worker Vehicle	Vendor	Hauling
	Count	Number	Number	Number	Length	Length	Length	Class	Vehicle Class	Vehicle Class
Demolition	0	0.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

**3.1 Mitigation Measures Construction** 

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.2 Demolition - 2022

## **Unmitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	day		
Off-Road	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

## Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 3.2 Demolition - 2022

## **Mitigated Construction On-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Off-Road	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

#### **Mitigated Construction Off-Site**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

### EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 4.1 Mitigation Measures Mobile

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/c	day		
Mitigated	1.6090	15.9822	18.0133	0.1172	6.9657	0.1954	7.1611	1.8912	0.1863	2.0775		12,334.07 61	12,334.07 61	0.2833	1.4642	12,777.48 66
Unmitigated	1.6090	15.9822	18.0133	0.1172	6.9657	0.1954	7.1611	1.8912	0.1863	2.0775		12,334.07 61	12,334.07 61	0.2833	1.4642	12,777.48 66

## 4.2 Trip Summary Information

	Ave	rage Daily Trip Ra	ite	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
City Park	0.00	0.00	0.00		
Other Asphalt Surfaces	0.00	0.00	0.00		
Parking Lot	0.00	0.00	0.00		
Unrefrigerated Warehouse-No Rail	419.00	419.00	419.00	1,795,734	1,795,734
User Defined Industrial	91.01	91.01	91.01	1,325,089	1,325,089
Total	510.01	510.01	510.01	3,120,823	3,120,823

# 4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
City Park	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Other Asphalt Surfaces	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Parking Lot	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Unrefrigerated Warehouse-No	16.60	8.40	6.90	59.00	0.00	41.00	92	5	3

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
User Defined Industrial	40.00	8.40	6.90	100.00	0.00	0.00	100	0	0

#### 4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
City Park	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Other Asphalt Surfaces	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Unrefrigerated Warehouse-No Rail	0.576000	0.060300	0.185900	0.151900	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	0.025900	0.000000	0.000000
User Defined Industrial	0.000000	0.000000	0.000000	0.000000	0.112000	0.030800	0.142900	0.714300	0.000000	0.000000	0.000000	0.000000	0.000000

# 5.0 Energy Detail

Historical Energy Use: N

## 5.1 Mitigation Measures Energy

Percent of Electricity Use Generated with Renewable Energy

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
NaturalGas Mitigated	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605
NaturalGas Unmitigated	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003	<b></b>	9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 5.2 Energy by Land Use - NaturalGas

## **Unmitigated**

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unrefrigerated Warehouse-No Rail	1317.83	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 5.2 Energy by Land Use - NaturalGas

## Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/c	lay		
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Unrefrigerated Warehouse-No Rail	1.31783	0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605
User Defined Industrial	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0142	0.1292	0.1085	7.8000e- 004		9.8200e- 003	9.8200e- 003		9.8200e- 003	9.8200e- 003		155.0392	155.0392	2.9700e- 003	2.8400e- 003	155.9605

# 6.0 Area Detail

6.1 Mitigation Measures Area

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/c	lay		
Mitigated	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155
Unmitigated	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155

# 6.2 Area by SubCategory

**Unmitigated** 

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day								lb/day							
Architectural Coating	0.6340					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	4.8643					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	8.7400e- 003	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155
Total	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## 6.2 Area by SubCategory

#### Mitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/d	day				
Architectural Coating	0.6340					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	4.8643					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Landscaping	8.7400e- 003	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155
Total	5.5071	8.6000e- 004	0.0944	1.0000e- 005		3.4000e- 004	3.4000e- 004		3.4000e- 004	3.4000e- 004		0.2023	0.2023	5.3000e- 004		0.2155

# 7.0 Water Detail

7.1 Mitigation Measures Water

# 8.0 Waste Detail

## 8.1 Mitigation Measures Waste

# 9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
Tractors/Loaders/Backhoes	1	4.00	365	200	0.37	CNG

Muranaka Warehouse (Operations) - Riverside-South Coast County, Winter

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

#### UnMitigated/Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Equipment Type	lb/day							lb/day								
Tractors/Loaders/ Backhoes	0.1103	1.0361	0.7492	3.1700e- 003		0.0376	0.0376		0.0346	0.0346	0.0000	306.5451	306.5451	0.0991		309.0237
Total	0.1103	1.0361	0.7492	3.1700e- 003		0.0376	0.0376		0.0346	0.0346	0.0000	306.5451	306.5451	0.0991		309.0237

## **10.0 Stationary Equipment**

## Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
Fire Pump	1	0.14	50	238	0.73	Diesel

#### **Boilers**

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

#### **User Defined Equipment**

Equipment Type Number

Muranaka Warehouse (Operations) - Riverside-South Coast County, Winter

## EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

## **10.1 Stationary Sources**

### Unmitigated/Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Equipment Type	lb/day							lb/day								
Fire Pump - Diesel (175 - 300 HP)		0.1528	0.1394	2.6000e- 004		8.0400e- 003	8.0400e- 003		8.0400e- 003	8.0400e- 003		27.9726	27.9726	3.9200e- 003		28.0707
Total	0.0547	0.1528	0.1394	2.6000e- 004		8.0400e- 003	8.0400e- 003		8.0400e- 003	8.0400e- 003		27.9726	27.9726	3.9200e- 003		28.0707

## 11.0 Vegetation

This page intentionally left blank



APPENDIX 3.3:

**PROJECT BLASTING EMISSIONS CALCULATION** 



This page intentionally left blank



#### BLASTING PM10/PM2.5

E(CO)=

E(NO<sub>x</sub>)=

E(SO<sub>x</sub>)=

E=	.000014(A)^1.5*.52 lbs PM10/lbs TSP			
		If Dynamite:	(Dynamite	, gelatin)
E=	PM <sub>10</sub> emissions, lbs/total	1	.04	
A=	Area to be blasted (SF)		53	
A(day)=	50,000		0	
E=	81.39 lbs PM <sub>10</sub> /day without watering	E(CO)=	98.28	lbs released per year
E=	17.09 lbs PM <sub>2.5</sub> /day without watering	E(NO <sub>x</sub> )=	50.085	lbs released per year
CE=	50.00% pre-wetting blasting areas and stabalizing soils once blasting is complete	E(SO <sub>x</sub> )=	0	lbs released per year
	(Source:Western regional Air Partnership)			
E=	40.70 lbs of PM <sub>10</sub> /day with watering	E(CO)=	10.92	lbs. released per day
E=	8.546 lbs of PM <sub>2.5</sub> /day with watering	E(NO <sub>x</sub> )=	5.565	lbs. released per day
		E(SO <sub>x</sub> )=	0	lbs. released per day
BLASTING	NOX ; SOx ; CO			

E= (Blasts/year) \* (avg. charges/blast) \*(avg. lbs./charge) \* 1/2000(lbs to tons conversion) \*EF

7.04 lbs of CO released per day

1.79 lbs of NO<sub>x</sub> released per day

0.21 lbs of SO<sub>x</sub> released per day

Blasts/year Maxibs./blastcharge Ibs/tons conversion Ibs/MT conversion	9 210 2000.00 2204.62	EF(Emission CO NO <sub>X</sub> SO <sub>X</sub>	Factors) (ANFO) 67 (Ib released/tons used) 17 (Ib released/tons used) 2 (Ib released/tons used)	Diesel Fuel Oil No. 2	6% (diesel fuel oil no. 2 content in ANEO)	df)
E(CO)= E(NO <sub>X</sub> )= E(SO <sub>X</sub> )= E(CO <sub>2</sub> )=		63.32 lbs of CO rel 16.07 lbs of NO <sub>x</sub> ru 1.89 lbs of SO <sub>x</sub> re 359.51 lbs of CO <sub>2</sub> re	eleased per year leased per year			
E(CO <sub>2</sub> )=		0.16 MT of CO <sub>2</sub> r	eleased per year			

Source of Max lbs. per blast; blasts/year: Urban Xroads noise Study 11381-12

This page intentionally left blank



APPENDIX 3.4:

SCAQMD AMICUS BRIEF



## IN THE SUPREME COURT OF C ALIFORNIA

## SIERRA CLUB, REVIVE THE SAN JOAQUIN, and LEAGUE OF WOMEN VOTERS OF FRESNO,

Plaintiffs and Appellants,

v.

COUNTY OF FRESNO,

Defendant and Respondent,

and,

APR **1 3** 2015

Frank A. Maxime Clerk

Deputy

FRIANT RANCH, L.P.,

Real Party in Interest and Respondent.

After a Published Decision by the Court of Appeal, filed May 27, 2014 Fifth Appellate District Case No. F066798

Appeal from the Superior Court of California, County of Fresno Case No. 11CECG00726 Honorable Rosendo A. Pena, Jr.

## APPLICATION OF THE SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT FOR LEAVE TO FILE BRIEF OF AMICUS CURIAE IN SUPPORT OF NEITHER PARTY AND [PROPOSED] BRIEF OF AMICUS CURIAE

Kurt R. Wiese, General Counsel (SBN 127251) \*Barbara Baird, Chief Deputy Counsel (SBN 81507) SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT 21865 Copley Drive, Diamond Bar, CA 91765 Telephone: 909-396-2302; Facsimile: 909-396-2961 Email: bbaird@aqmd.gov Counsel for [Proposed] Amicus Curiae, SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT

## **BECEIVED**

APR - 8 2015

CLERK SUPREME COURT

STIPREME COURT

## **TABLE OF CONTENTS**

APPL	ICATI	ON FOR LEAVE TO FILE amicus curiae brief App-1
HOW	THIS	BRIEF WILL ASSIST THE COURT App-1
STAT	EMEN	T OF INTEREST OF AMICUS CURIAE App-3
CERT	IFICA	TION REGARDING AUTHORSHIP & FUNDING App-4
BRIE	F OF A	MICUS CURIAE 1
SUMN	MARY	OF ARGUMENT 1
ARGU	JMEN	Γ2
I.	RELE	VANT FACTUAL AND LEGAL FRAMEWORK 2
	A.	Air Quality Regulatory Background
	B.	The SCAQMD's Role Under CEQA
II.	RULE MUST	COURT SHOULD NOT SET A HARD-AND-FAST E CONCERNING THE EXTENT TO WHICH AN EIR I CORRELATE A PROJECT'S EMISSION OF UTANTS WITH RESULTING HEALTH IMPACTS
III.	SUFF REQU AND	QUESTION OF WHETHER AN EIR CONTAINS ICIENT ANALYSIS TO MEET CEQA'S JIREMENTS IS A MIXED QUESTION OF FACT LAW GOVERNED BY TWO DIFFERENT IDARDS OF REVIEW
	A.	Standard of Review for Feasibility Determination and Sufficiency as an Informative Document
	B.	Friant Ranch's Rationale for Rejecting the Independent Judgment Standard of Review is Unsupported by Case Law
IV.	REQU WITH	RTS MUST SCRUPULOUSLY ENFORCE THE JIREMENTS THAT LEAD AGENCIES CONSULT I AND OBTAIN COMMENTS FROM AIR RICTS
CONC	CLUSI	ON 29

## **TABLE OF AUTHORITIES**

# State Cases

Association of Irritated Residents v. County of Madera (2003) 107 Cal App.4th 13831, 9
Bakersfield Citizens for Local Control v. City of Bakersfield (2004) 124 Cal.App.4th 11849, 22
Berkeley Keep Jets Over the Bay v. Board of Port Commissioners (2007) 91 Cal.App.4th 134421, 28
Center for Biological Diversity v. County of San Bernardino (2010) 185 Cal.App.4th 86620
Citizens of Goleta Valley v. Bd. of Supervisors (1990) 52 Cal.3d 553
County of Amador v. El Dorado County Water Agency (1999) 76 Cal.App.4th 93123
Crocker National Bank v. City and County of San Francisco (1989) 49 Cal.3d 881
Ebbetts Pass Forest Watch v. California Dept. of Forestry & Fire Protection (2008) 43 Cal.4th 936
Fall River Wild Trout Foundation v. County of Shasta, (1999)70 Cal.App.4th 48227, 28
<i>Gray v. County of Madera</i> (2008) 167 Cal.App.4th 109925
Laurel Heights Improvement Assn. v. Regents of the Univ of Cal. ("Laurel Heights I") (1988) 47 Cal.3d 376
Natural Res. Def. Council v SCAQMD, Los Angeles Superior Court No. BS110792
Neighbors for Smart Rail v. Exposition Metro Line (2013) 57 Cal.4th 439

.

## State Cases (cont'd)

Orange County Air Pollution Control District v. Public Util. Com. (1971) 4 Cal.3d 94527
Save Our Peninsula Comm. v. Monterey County Bd. of Supervisors (2001) 87 Cal.App.4th 9919
Schenck v. County of Sonoma (2011) 198 Cal.App.4th 949
Sierra Club v. County of Fresno (2014)
226 Cal.App.4th 704 (superseded by grant of review) 172 Cal.Rptr.3d 271
Sierra Club v. State Bd. Of Forestry (1994) 7 Cal.4th 1215
Uphold Our Heritage v. Town of Woodside (2007)
147 Cal.App.4th 58720
Vineyard Area Citizens for Responsible Growth, Inc. v. City of Rancho Cordova (2007)
40 Cal.4th 412
Western Oil & Gas Assn. v. Monterey Bay Unified APCD (1989)
49 Cal.3d 408

# California Statutes

Health & Saf. Code § 39666	5
Health & Saf. Code § 40000	3
Health & Saf. Code § 40001	3
Health & Saf. Code § 40410	3
Health & Saf. Code §§ 40460, et seq	4
Health & Saf. Code § 41508	5
Health & Saf. Code §§ 42300, et seq	5
Health & Saf. Code § 44320	5
Health & Saf. Code § 44322	5
Health & Saf. Code § 44360	5
Pub. Resources Code § 20180.3	27
Pub. Resources Code § 21061 1	9
Pub. Resources Code § 21061.1 1	.6

## California Statutes (cont'd)

Pub. Resources Code § 21080	6
Pub. Resources Code § 21080.5	6
Pub. Resources Code § 21083.1	
Pub. Resources Code § 21100	
Pub. Resources Code § 21104	6, 7 26
Pub. Resources Code §§ 21150-21154	7
Pub. Resources Code § 21151.8	
Pub. Resources Code § 21153	6, 7, 26

## **California Regulations**

Cal. Code Regs., tit. 14, §§ 15000, et seq. ("CEQA Guidelines")

CEQA Guidelines § 15050	6
CEQA Guidelines § 15051	1,6
CEQA Guidelines § 15073	
CEQA Guidelines § 15086	6
CEQA Guidelines § 15088.5	28
CEQA Guidelines § 15096	6
CEQA Guidelines § 15126.2	25
CEQA Guidelines § 15131	26
CEQA Guidelines § 15144	
CEQA Guidelines § 151519,	18, 19
CEQA Guidelines § 15204	
CEQA Guidelines § 15251	
CEQA Guidelines § 15366	
CEQA Guidelines § 15381	

Cal.	Code Regs., tit.	17,	§ 60104	.3	
------	------------------	-----	---------	----	--

## **Federal Statutes**

42 U.S.C. § 7401; CAA § 101	
42 U.S.C. § 7408; CAA § 108	
42 U.S.C. § 7409; CAA § 109	
42 U.S.C. § 7410; CAA § 110	
42 U.S.C. § 7412; CAA § 112	
42 U.S.C. § 7502; CAA § 172	5, 13
42 U.S.C. § 7503; CAA § 173	5, 13
42 U.S.C. § 7511a; CAA § 182	
42 U.S.C. § 7521; CAA § 202	
42 U.S.C. § 7543; CAA § 209	
42 U.S.C. § 7547; CAA § 213	

# <u>Rules</u>

SCAQMD Rule 1303
Other
Association of Environmental Professionals, 2015 CEQA Statute and Guidelines (2015) (Appendix G, "Environmental Checklist Form."
CARB, Health Impacts Analysis: PM Premature Death Relationship14
CARB, Health Impacts Analysis: PM Mortality Relationship16
CARB, Resolution 98-35, Aug. 27, 1998
SCAQMD, Air Quality Analysis Handbook
SCAQMD, Final 2012 AQMP (Feb. 2013)
SCAQMD, Final Subsequent Mitigated Negative Declaration for:Warren E&P, Inc. WTU Central Facility, New Equipment Project (certified July 19, 2011)
SCAQMD Governing Board Agenda, February 4, 2011, Agenda Item 26, Assessment for: Re-adoption of Proposed Rule 1315 – Federal New Source Review Tracking System,
SCAQMD Governing Board Agenda, April 3, 2015, Agenda Item 16, Attachment A
SCAQMD, Health Risk Assessment Summary form
SCAQMD, Supplemental Guidelines for Preparing Risk Assessments for the Air Toxics "Hot Spots" Information and Assessment Act (AB2588)10
U.S. EPA, Ground Level Ozone11
U.S. EPA, Guideline on Ozone Monitoring Site Selection (Aug. 1998) EPA-454/R-98-002 § 5.1.2
U.S. EPA, Health Effects of Ozone in the General Population, Figure 9,
U.S. EPA, National Ambient Air Quality Standards (NAAQS)
U.S. EPA, Particulate Matter (PM)

# TO THE HONORABLE CHIEF JUSTICE AND JUSTICES OF THE SUPREME COURT:

#### **APPLICATION FOR LEAVE TO FILE AMICUS CURIAE BRIEF**

Pursuant to Rule 8.520(f) of the California Rules of Court, the South Coast Air Quality Management District (SCAQMD) respectfully requests leave to file the attached *amicus curiae* brief. Because SCAQMD's position differs from that of either party, we request leave to submit this amicus brief in support of neither party.

#### HOW THIS BRIEF WILL ASSIST THE COURT

SCAQMD's proposed amicus brief takes a position on two of the issues in this case. In both instances, its position differs from that of either party. The issues are:

- Does the California Environmental Quality Act (CEQA) require an environmental impact report (EIR) to correlate a project's air pollution emissions with specific levels of health impacts?
- 2) What is the proper standard of review for determining whether an EIR provides sufficient information on the health impacts caused by a project's emission of air pollutants?

This brief will assist the Court by discussing the practical realities of correlating identified air quality impacts with specific health outcomes. In short, CEQA requires agencies to provide detailed information about a project's air quality impacts that is sufficient for the public and decisionmakers to adequately evaluate the project and meaningfully understand its impacts. However, the level of analysis is governed by a rule of reason; CEQA only requires agencies to conduct analysis if it is reasonably feasible to do so. With regard to health-related air quality impacts, an analysis that correlates a project's air pollution emissions with specific levels of health impacts will be feasible in some cases but not others. Whether it is feasible depends on a variety of factors, including the nature of the project and the nature of the analysis under consideration. The feasibility of analysis may also change over time as air districts and others develop new tools for measuring projects' air quality related health impacts. Because SCAQMD has among the most sophisticated air quality modeling and health impact evaluation capability of any of the air districts in the State, it is uniquely situated to express an opinion on the extent to which the Court should hold that CEQA requires lead agencies to correlate air quality impacts with specific health outcomes.

SCAQMD can also offer a unique perspective on the question of the appropriate standard of review. SCAQMD submits that the proper standard of review for determining whether an EIR is sufficient as an informational document is more nuanced than argued by either party. In our view, this is a mixed question of fact and law. It includes determining whether additional analysis is feasible, which is primarily a factual question that should be reviewed under the substantial evidence standard. However, it also involves determining whether the omission of a particular analysis renders an EIR insufficient to serve CEQA's purpose as a meaningful, informational document. If a lead agency has not determined that a requested analysis is infeasible, it is the court's role to determine whether the EIR nevertheless meets CEQA's purposes, and courts should not defer to the lead agency's conclusions regarding the legal sufficiency of an EIR's analysis. The ultimate question of whether an EIR's analysis is "sufficient" to serve CEQA's informational purposes is predominately a question of law that courts should review de novo.

This brief will explain the rationale for these arguments and may assist the Court in reaching a conclusion that accords proper respect to a lead agency's factual conclusions while maintaining judicial authority over the ultimate question of what level of analysis CEQA requires.

## STATEMENT OF INTEREST OF AMICUS CURIAE

The SCAQMD is the regional agency primarily responsible for air pollution control in the South Coast Air Basin, which consists of all of Orange County and the non-desert portions of the Los Angeles, Riverside, and San Bernardino Counties. (Health & Saf. Code § 40410; Cal. Code Regs., tit. 17, § 60104.) The SCAQMD participates in the CEQA process in several ways. Sometimes it acts as a lead agency that prepares CEQA documents for projects. Other times it acts as a responsible agency when it has permit authority over some part of a project that is undergoing CEQA review by a different lead agency. Finally, SCAQMD also acts as a commenting agency for CEQA documents that it receives because it is a public agency with jurisdiction by law over natural resources affected by the project.

In all of these capacities, SCAQMD will be affected by the decision in this case. SCAQMD sometimes submits comments requesting that a lead agency perform an additional type of air quality or health impacts analysis. On the other hand, SCAQMD sometimes determines that a particular type of health impact analysis is not feasible or would not produce reliable and informative results. Thus, SCAQMD will be affected by the Court's resolution of the extent to which CEQA requires EIRs to correlate emissions and health impacts, and its resolution of the proper standard of review.

## **CERTIFICATION REGARDING AUTHORSHIP AND FUNDING**

No party or counsel in the pending case authored the proposed amicus curiae brief in whole or in part, or made any monetary contribution intended to fund the preparation or submission of the brief. No person or entity other than the proposed *Amicus Curiae* made any monetary contribution intended to fund the preparation or submission of the brief.

Respectfully submitted,

DATED: April 3, 2015

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT KURT R. WIESE, GENERAL COUNSEL BARBARA BAIRD, CHIEF DEPUTY COUNSEL

By: 1 Julian J'

Barbara Baird Attorneys for [proposed] Amicus Curiae SOUTH COAST AIR QUALITY MANAGEMENT DISTICT

# BRIEF OF AMICUS CURIAE SUMMARY OF ARGUMENT

The South Coast Air Quality Management District (SCAQMD) submits that this Court should not try to establish a hard-and-fast rule concerning whether lead agencies are required to correlate emissions of air pollutants with specific health consequences in their environmental impact reports (EIR). The level of detail required in EIRs is governed by a few, core CEQA (California Environmental Quality Act) principles. As this Court has stated, "[a]n EIR must include detail sufficient to enable those who did not participate in its preparation to understand and to consider meaningfully the issues raised by the proposed project." (Laurel Heights Improvement Assn. v. Regents of the Univ of Cal. (1988) 47 Cal.3d 376, 405 ["Laurel Heights 1"]) Accordingly, "an agency must use its best efforts to find out and disclose all that it reasonably can." (Vinevard Area Citizens for Responsible Growth, Inc. v. City of Rancho Cordova (2007) 40 Cal.4th 412, 428 (quoting CEQA Guidelines § 15144)<sup>1</sup>.). However, "[a]nalysis of environmental effects need not be exhaustive, but will be judged in light of what is reasonably feasible." (Association of Irritated Residents v. County of Madera (2003) 107 Cal.App.4th 1383, 1390; CEQA Guidelines §§ 15151, 15204(a).)

With regard to analysis of air quality related health impacts, EIRs must generally quantify a project's pollutant emissions, but in some cases it is not feasible to correlate these emissions to specific, quantifiable health impacts (e.g., premature mortality; hospital admissions). In such cases, a general description of the adverse health impacts resulting from the pollutants at issue may be sufficient. In other cases, due to the magnitude

<sup>&</sup>lt;sup>1</sup> The CEQA Guidelines are found at Cal. Code Regs., tit. 14 §§ 15000, *et seq*.

or nature of the pollution emissions, as well as the specificity of the project involved, it may be feasible to quantify health impacts. Or there may be a less exacting, but still meaningful analysis of health impacts that can feasibly be performed. In these instances, agencies should disclose those impacts.

SCAQMD also submits that whether or not an EIR complies with CEQA's informational mandates by providing sufficient, feasible analysis is a mixed question of fact and law. Pertinent here, the question of whether an EIR's discussion of health impacts from air pollution is sufficient to allow the public to understand and consider meaningfully the issues involves two inquiries: (1) Is it feasible to provide the information or analysis that a commenter is requesting or a petitioner is arguing should be required?; and (2) Even if it is feasible, is the agency relying on other policy or legal considerations to justify not preparing the requested analysis? The first question of whether an analysis is feasible is primarily a question of fact that should be judged by the substantial evidence standard. The second inquiry involves evaluating CEQA's information disclosure purposes against the asserted reasons to not perform the requested analysis. For example, an agency might believe that its EIR meets CEQA's informational disclosure standards even without a particular analysis, and therefore choose not to conduct that analysis. SCAQMD submits that this is more of a legal question, which should be reviewed de novo as a question of law.

#### ARGUMENT

## I. RELEVANT FACTUAL AND LEGAL FRAMEWORK.

## A. Air Quality Regulatory Background

The South Coast Air Quality Management District (SCAQMD) is one of the local and regional air pollution control districts and air quality

management districts in California. The SCAQMD is the regional air pollution agency for the South Coast Air Basin, which consists of all of Orange County and the non-desert portions of Los Angeles, Riverside, and San Bernardino Counties. (Health & Saf. Code § 40410, 17 Cal. Code Reg. § 60104.) The SCAQMD also includes the Coachella Valley in Riverside County (Palm Springs area to the Salton Sea). (SCAQMD, *Final 2012 AQMP (Feb. 2013)*, http://www.aqmd.gov/home/library/clean-air-plans/airquality-mgt-plan/final-2012-air-quality-management-plan; then follow "chapter 7" hyperlink; pp 7-1, 7-3 (last visited Apr. 1, 2015).) The SCAQMD's jurisdiction includes over 16 million residents and has the worst or nearly the worst air pollution levels in the country for ozone and fine particulate matter. (SCAQMD, *Final 2012 AQMP (Feb. 2013)*, http://www.aqmd.gov/home/library/clean-air-plans/airplan/final-2012-air-quality-management-plan; then follow "Executive Summary" hyperlink p. ES-1 (last visited Apr. 1, 2015).)

Under California law, the local and regional districts are primarily responsible for controlling air pollution from all sources except motor vehicles. (Health & Saf. Code § 40000.) The California Air Resources Board (CARB), part of the California Environmental Protection Agency, is primarily responsible for controlling pollution from motor vehicles. (*Id*.) The air districts must adopt rules to achieve and maintain the state and federal ambient air quality standards within their jurisdictions. (Health & Saf. Code § 40001.)

The federal Clean Air Act (CAA) requires the United States Environmental Protection Agency (EPA) to identify pollutants that are widely distributed and pose a threat to human health, developing a so-called "criteria" document. (42 U.S.C. § 7408; CAA § 108.) These pollutants are frequently called "criteria pollutants." EPA must then establish "national ambient air quality standards" at levels "requisite to protect public health",

allowing "an adequate margin of safety." (42 U.S.C. § 7409; CAA § 109.) EPA has set standards for six identified pollutants: ozone, nitrogen dioxide, sulfur dioxide, carbon monoxide, particulate matter (PM), and lead. (U.S. EPA, National Ambient Air Quality Standards (NAAQS), http://www.epa.gov/air/criteria.html (last updated Oct. 21, 2014).)<sup>2</sup>

Under the Clean Air Act, EPA sets emission standards for motor vehicles and "nonroad engines" (mobile farm and construction equipment, marine vessels, locomotives, aircraft, etc.). (42 U.S.C. §§ 7521, 7547; CAA §§ 202, 213.) California is the only state allowed to establish emission standards for motor vehicles and most nonroad sources; however, it may only do so with EPA's approval. (42 U.S.C. §§ 7543(b), 7543(e); CAA  $\S$  209(b), 209(c).) Sources such as manufacturing facilities, power plants and refineries that are not mobile are often referred to as "stationary sources." The Clean Air Act charges state and local agencies with the primary responsibility to attain the national ambient air quality standards. (42 U.S.C. § 7401(a)(3); CAA § 101(a)(3).) Each state must adopt and implement a plan including enforceable measures to achieve and maintain the national ambient air quality standards. (42 U.S.C. § 7410; CAA § 110.) The SCAQMD and CARB jointly prepare portion of the plan for the South Coast Air Basin and submit it for approval by EPA. (Health & Saf. Code §§ 40460, et seq.)

The Clean Air Act also requires state and local agencies to adopt a permit program requiring, among other things, that new or modified "major" stationary sources use technology to achieve the "lowest achievable emission rate," and to control minor stationary sources as

<sup>2</sup> Particulate matter (PM) is further divided into two categories: fine particulate or  $PM_{2.5}$  (particles with a diameter of less than or equal to 2.5 microns) and coarse particulate ( $PM_{10}$ ) (particles with a diameter of 10 microns or less). (U.S. EPA, Particulate Matter (PM), http://www.epa.gov/airquality/particlepollution/ (last visited Apr. 1, 2015).) needed to help attain the standards. (42 U.S.C. §§ 7502(c)(5), 7503(a)(2), 7410(a)(2)(C); CAA §§ 172(c)(5), 173(a)(2), 110(a)(2)(C).) The air districts implement these permit programs in California. (Health & Saf. Code §§ 42300, et seq.)

The Clean Air Act also sets out a regulatory structure for over 100 so-called "hazardous air pollutants" calling for EPA to establish "maximum achievable control technology" (MACT) for sources of these pollutants. (42 U.S.C. § 7412(d)(2); CAA § 112(d)(2).) California refers to these pollutants as "toxic air contaminants" (TACs) which are subject to two state-required programs. The first program requires "air toxics control measures" for specific categories of sources. (Health & Saf. Code § 39666.) The other program requires larger stationary sources and sources identified by air districts to prepare "health risk assessments" for impacts of toxic air contaminants. (Health & Saf. Code §§ 44320(b), 44322, 44360.) If the health risk exceeds levels identified by the district as "significant," the facility must implement a "risk reduction plan" to bring its risk levels below "significant" levels. Air districts may adopt additional more stringent requirements than those required by state law, including requirements for toxic air contaminants. (Health & Saf. Code § 41508; Western Oil & Gas Assn. v. Monterey Bay Unified APCD (1989) 49 Cal.3d 408, 414.) For example, SCAQMD has adopted a rule requiring new or modified sources to keep their risks below specified levels and use best available control technology (BACT) for toxics. (SCAQMD, Rule 1401-New Source Review of Toxic Air Contaminants,

http://www.aqmd.gov/home/regulations/rules/scaqmd-rule-book/regulationxiv; then follow "Rule 1401" hyperlink (last visited Apr. 1, 2015).)

### **B.** The SCAQMD's Role Under CEQA

The California Environmental Quality Act (CEQA) requires public agencies to perform an environmental review and appropriate analysis for projects that they implement or approve. (Pub. Resources Code § 21080(a).) The agency with primary approval authority for a particular project is generally the "lead agency" that prepares the appropriate CEQA document. (CEQA Guidelines §§ 15050, 15051.) Other agencies having a subsequent approval authority over all or part of a project are called "responsible" agencies that must determine whether the CEQA document is adequate for their use. (CEQA Guidelines §§ 15096(c), 15381.) Lead agencies must also consult with and circulate their environmental impact reports to "trustee agencies" and agencies "with jurisdiction by law" including "authority over resources which may be affected by the project." (Pub. Resources Code §§ 21104(a), 21153; CEQA Guidelines §§ 15086(a)(3), 15073(c).) The SCAQMD has a role in all these aspects of CEQA.

Fulfilling its responsibilities to implement its air quality plan and adopt rules to attain the national ambient air quality standards, SCAQMD adopts a dozen or more rules each year to require pollution reductions from a wide variety of sources. The SCAQMD staff evaluates each rule for any adverse environmental impact and prepares the appropriate CEQA document. Although most rules reduce air emissions, they may have secondary environmental impacts such as use of water or energy or disposal of waste—e.g., spent catalyst from control equipment.<sup>3</sup>

<sup>&</sup>lt;sup>3</sup> The SCAQMD's CEQA program for its rules is a "Certified Regulatory Program" under which it prepares a "functionally equivalent" document in lieu of a negative declaration or EIR. (Pub. Resources Code § 21080.5, CEQA Guidelines § 15251(l).)

The SCAQMD also approves a large number of permits every year to construct new, modified, or replacement facilities that emit regulated air pollutants. The majority of these air pollutant sources have already been included in an earlier CEQA evaluation for a larger project, are currently being evaluated by a local government as lead agency, or qualify for an exemption. However, the SCAQMD sometimes acts as lead agency for major projects where the local government does not have a discretionary approval. In such cases, SCAQMD prepares and certifies a negative declaration or environmental impact report (EIR) as appropriate.<sup>4</sup> SCAQMD evaluates perhaps a dozen such permit projects under CEQA each year. SCAQMD is often also a "responsible agency" for many projects since it must issue a permit for part of the projects (e.g., a boiler used to provide heat in a commercial building). For permit projects evaluated by another lead agency under CEQA, SCAQMD has the right to determine that the CEQA document is inadequate for its purposes as a responsible agency, but it may not do so because its permit program already requires all permitted sources to use the best available air pollution control technology. (SCAQMD, Rule 1303(a)(1) - Requirements, http://www.aqmd.gov/home/regulations/rules/scaqmd-rule-book/regulationxiii; then follow "Rule 1303" hyperlink (last visited Apr. 1, 2015).)

Finally, SCAQMD receives as many as 60 or more CEQA documents each month (around 500 per year) in its role as commenting agency or an agency with "jurisdiction by law" over air quality—a natural resource affected by the project. (Pub. Resources Code §§ 21104(a), 21153; CEQA Guidelines § 15366(a)(3).) The SCAQMD staff provides comments on as many as 25 or 30 such documents each month.

<sup>&</sup>lt;sup>4</sup> The SCAQMD's permit projects are not included in its Certified Regulatory Program, and are evaluated under the traditional local government CEQA analysis. (Pub. Resources Code §§ 21150-21154.)

(SCAQMD Governing Board Agenda, Apr. 3, 2015, Agenda Item 16, Attachment A, <u>http://www.aqmd.gov/home/library/meeting-agendas-</u> <u>minutes/agenda?title=governing-board-meeting-agenda-april-3-2015</u>; then follow "16. Lead Agency Projects and Environmental Documents Received by SCAQMD" hyperlink (last visited Apr. 1, 2015).) Of course, SCAQMD focuses its commenting efforts on the more significant projects.

Typically, SCAQMD comments on the adequacy of air quality analysis, appropriateness of assumptions and methodology, and completeness of the recommended air quality mitigation measures. Staff may comment on the need to prepare a health risk assessment detailing the projected cancer and noncancer risks from toxic air contaminants resulting from the project, particularly the impacts of diesel particulate matter, which CARB has identified as a toxic air contaminant based on its carcinogenic effects. (California Air Resources Board, Resolution 98-35, Aug. 27, 1998, <u>http://www.arb.ca.gov/regact/diesltac/diesltac.htm</u>; then follow Resolution 98-35 hyperlink (last visited Apr. 1, 2015).) Because SCAQMD already requires new or modified stationary sources of toxic air contaminants to use the best available control technology for toxics and to keep their risks below specified levels, (SCAQMD Rule 1401, supra, note 15), the greatest opportunity to further mitigate toxic impacts through the CEQA process is by reducing emissions—particularly diesel emissions—from vehicles.

## II. THIS COURT SHOULD NOT SET A HARD-AND-FAST RULE CONCERNING THE EXTENT TO WHICH AN EIR MUST CORRELATE A PROJECT'S EMISSION OF POLLUTANTS WITH RESULTING HEALTH IMPACTS.

Numerous cases hold that courts do not review the correctness of an EIR's conclusions but rather its sufficiency as an informative document. (*Laurel Heights 1, supra*, 47 Cal.3d at p. 392; *Citizens of Goleta Valley v.* 

Bd. of Supervisors (1990) 52 Cal.3d 553, 569; Bakersfield Citizens for Local Control v. City of Bakersfield (2004) 124 Cal.App.4th 1184, 1197.)

As stated by the Court of Appeal in this case, where an EIR has addressed a topic, but the petitioner claims that the information provided about that topic is insufficient, courts must "draw[] a line that divides *sufficient* discussions from those that are *insufficient*." (*Sierra Club v*. *County of Fresno* (2014) 226 Cal.App.4<sup>th</sup> 704 (superseded by grant of review) 172 Cal.Rptr.3d 271, 290.) The Court of Appeal readily admitted that "[t]he terms themselves – sufficient and insufficient – provide little, if any, guidance as to where the line should be drawn. They are simply labels applied once the court has completed its analysis." (*Id*.)

The CEQA Guidelines, however, provide guidance regarding what constitutes a sufficient discussion of impacts. Section 15151 states that "the sufficiency of an EIR is to be reviewed in light of what is reasonably feasible." Case law reflects this: "Analysis of environmental effects need not be exhaustive, but will be judged in light of what was reasonably feasible." (*Association of Irritated Residents v. County of Madera, supra,* 107 Cal.App.4th at p. 1390; see also CEQA Guidelines § 15204(a).)

Applying this test, this Court cannot realistically establish a hardand-fast rule that an analysis correlating air pollution impacts of a project to quantified resulting health impacts is always required, or indeed that it is never required. Simply put, in some cases such an analysis will be "feasible"; in some cases it will not.

For example, air pollution control districts often require a proposed new source of toxic air contaminants to prepare a "health risk assessment" before issuing a permit to construct. District rules often limit the allowable cancer risk the new source may cause to the "maximally exposed individual" (worker and residence exposures). (*See, e.g.*, SCAQMD Rule 1401(c)(8); 1401(d)(1), *supra* note 15.) In order to perform this analysis, it

is necessary to have data regarding the sources and types of air toxic contaminants, location of emission points, velocity of emissions, the meteorology and topography of the area, and the location of receptors (worker and residence). (SCAQMD, *Supplemental Guidelines for Preparing Risk Assessments for the Air Toxics "Hot Spots" Information and Assessment Act (AB2588), pp. 11-16*; (last visited Apr. 1, 2015) http://www.aqmd.gov/home/library/documents-support-material; "Guidelines" hyperlink; AB2588; then follow AB2588 Risk Assessment Guidelines hyperlink.)

Thus, it is feasible to determine the health risk posed by a new gas station locating at an intersection in a mixed use area, where receptor locations are known. On the other hand, it may not be feasible to perform a health risk assessment for airborne toxics that will be emitted by a generic industrial building that was built on "speculation" (i.e., without knowing the future tenant(s)). Even where a health risk assessment can be prepared, however, the resulting maximum health risk value is only a calculation of risk—it does not necessarily mean anyone will contract cancer as a result of the project.

In order to find the "cancer burden" or expected additional cases of cancer resulting from the project, it is also necessary to know the numbers and location of individuals living within the "zone of impact" of the project: i.e., those living in areas where the projected cancer risk from the project exceeds one in a million. (SCAQMD, Health Risk Assessment Summary form, <u>http://www.aqmd.gov/home/forms</u>; filter by "AB2588" category; then "Health Risk Assessment" hyperlink (last visited Apr. 1, 2015).) The affected population is divided into bands of those exposed to at least 1 in a million risk, those exposed to at least 10 in a million risk, etc. up to those exposed at the highest levels. (*Id*.) This data allows agencies to calculate an approximate number of additional cancer cases expected from

the project. However, it is not possible to predict which particular individuals will be affected.

For the so-called criteria pollutants<sup>5</sup>, such as ozone, it may be more difficult to quantify health impacts. Ozone is formed in the atmosphere from the chemical reaction of the nitrogen oxides (NO<sub>x</sub>) and volatile organic compounds (VOC) in the presence of sunlight. (U.S. EPA, Ground Level Ozone, <u>http://www.epa.gov/airquality/ozonepollution/</u> (last updated Mar. 25, 2015).) It takes time and the influence of meteorological conditions for these reactions to occur, so ozone may be formed at a distance downwind from the sources. (U.S. EPA, *Guideline on Ozone Monitoring Site Selection* (Aug. 1998) EPA-454/R-98-002 § 5.1.2, <u>http://www.epa.gov/ttnamti1/archive/cpreldoc.html</u> (last visited Apr. 1, 2015).) NO<sub>x</sub> and VOC are known as "precursors" of ozone.

Scientifically, health effects from ozone are correlated with increases in the ambient level of ozone in the air a person breathes. (U.S. EPA, *Health Effects of Ozone in the General Population*, Figure 9, <u>http://www.epa.gov/apti/ozonehealth/population.html#levels</u> (last visited Apr. 1, 2015).) However, it takes a large amount of additional precursor emissions to cause a modeled increase in ambient ozone levels over an entire region. For example, the SCAQMD's 2012 AQMP showed that reducing NO<sub>x</sub> by 432 tons per day (157,680 tons/year) and reducing VOC by 187 tons per day (68,255 tons/year) would reduce ozone levels at the SCAQMD's monitor site with the highest levels by only 9 parts per billion. (South Coast Air Quality Management District, *Final 2012 AQMP (February 2013)*, <u>http://www.aqmd.gov/home/library/clean-air-plans/airquality-mgt-plan/final-2012-air-quality-management-plan; then follow "Appendix V: Modeling & Attainment Demonstrations" hyperlink,</u>

<sup>&</sup>lt;sup>5</sup> See discussion of types of pollutants, supra, Part I.A.

pp. v-4-2, v-7-4, v-7-24.) SCAQMD staff does not currently know of a way to accurately quantify ozone-related health impacts caused by  $NO_x$  or VOC emissions from relatively small projects.

On the other hand, this type of analysis may be feasible for projects on a regional scale with very high emissions of NO<sub>x</sub> and VOCs, where impacts are regional. For example, in 2011 the SCAQMD performed a health impact analysis in its CEQA document for proposed Rule 1315, which authorized various newly-permitted sources to use offsets from the districts "internal bank" of emission reductions. This CEQA analysis accounted for essentially all the increases in emissions due to new or modified sources in the District between 2010 and 2030.<sup>6</sup> The SCAQMD was able to correlate this very large emissions increase (e.g., 6,620 pounds per day  $NO_x$  (1,208 tons per year), 89,180 pounds per day VOC (16,275 tons per year)) to expected health outcomes from ozone and particulate matter (e.g., 20 premature deaths per year and 89,947 school absences in the year 2030 due to ozone).<sup>7</sup> (SCAQMD Governing Board Agenda, February 4, 2011, Agenda Item 26, Assessment for: Re-adoption of Proposed Rule 1315 – Federal New Source Review Tracking System (see hyperlink in fn 6) at p. 4.1-35, Table 4.1-29.)

<sup>6</sup> (SCAQMD Governing Board Agenda, February 4, 2011, Agenda Item 26, Attachment G, Assessment for: Re-adoption of Proposed Rule 1315 – Federal New Source Review Tracking System, Vol. 1, p.4.0-6, http://www.aqmd.gov/home/library/meeting-agendasminutes/agenda?title=governing-board-meeting-agenda-february-4-2011;

the follow "26. Adopt Proposed Rule 1315 – Federal New Source Review Tracking System" (last visited April 1, 2015).)

<sup>&</sup>lt;sup>7</sup> The SCAQMD was able to establish the location of future  $NO_x$  and VOC emissions by assuming that new projects would be built in the same locations and proportions as existing stationary sources. This CEQA document was upheld by the Los Angeles County Superior Court in *Natural Res. Def. Council v SCAQMD*, Los Angeles Superior Court No. BS110792).

However, a project emitting only 10 tons per year of NO<sub>x</sub> or VOC is small enough that its regional impact on ambient ozone levels may not be detected in the regional air quality models that are currently used to determine ozone levels. Thus, in this case it would not be feasible to directly correlate project emissions of VOC or NO<sub>x</sub> with specific health impacts from ozone. This is in part because ozone formation is not linearly related to emissions. Ozone impacts vary depending on the location of the emissions, the location of other precursor emissions, meteorology and seasonal impacts, and because ozone is formed some time later and downwind from the actual emission. (EPA Guideline on Ozone Monitoring Site Selection (Aug. 1998) EPA-454/R-98-002, § 5.1.2; <u>https://www.epa.gov/ttnamtil/archive/cpreldoc.html</u>; then search "Guideline on Ozone Monitoring Site Selection" click on pdf) (last viewed Apr. 1, 2015).)

SCAQMD has set its CEQA "significance" threshold for NO<sub>x</sub> and VOC at 10 tons per year (expressed as 55 lb/day). (SCAQMD, *Air Quality Analysis Handbook*, <u>http://www.aqmd.gov/home/regulations/ceqa/airquality-analysis-handbook</u>; then follow "SCAQMD Air Quality Significance Thresholds" hyperlink (last visited Apr. 1, 2015).) This is because the federal Clean Air Act defines a "major" stationary source for "extreme" ozone nonattainment areas such as SCAQMD as one emitting 10 tons/year. (42 U.S.C. §§ 7511a(e), 7511a(f); CAA §§ 182(e), 182(f).) Under the Clean Air Act, such sources are subject to enhanced control requirements (42 U.S.C. §§ 7502(c)(5), 7503; CAA §§ 172(c)(5), 173), so SCAQMD decided this was an appropriate threshold for making a CEQA "significance" finding and requiring feasible mitigation. Essentially, SCAQMD takes the position that a source that emits 10 tons/year of NO<sub>x</sub> or VOC would contribute cumulatively to ozone formation. Therefore, lead agencies that use SCAQMD's thresholds of significance may determine

that many projects have "significant" air quality impacts and must apply all feasible mitigation measures, yet will not be able to precisely correlate the project to quantifiable health impacts, unless the emissions are sufficiently high to use a regional modeling program.

In the case of particulate matter  $(PM_{2.5})^8$ , another "criteria" pollutant, SCAQMD staff is aware of two possible methods of analysis. SCAQMD used regional modeling to predict expected health impacts from its proposed Rule 1315, as mentioned above. Also, the California Air Resources Board (CARB) has developed a methodology that can predict expected mortality (premature deaths) from large amounts of  $PM_{25}$ (California Air Resources Board, Health Impacts Analysis: PM Premature Death Relationship, http://www.arb.ca.gov/research/health/pm-mort/pmmort arch.htm (last reviewed Jan. 19, 2012).) SCAQMD used the CARB methodology to predict impacts from three very large power plants (e.g., 731-1837 lbs/day). (Final Environmental Assessment for Rule 1315, supra, pp 4.0-12, 4.1-13, 4.1-37 (e.g., 125 premature deaths in the entire SCAQMD in 2030), 4.1-39 (0.05 to 1.77 annual premature deaths from power plants.) Again, this project involved large amounts of additional PM<sub>2.5</sub> in the District, up to 2.82 tons/day (5,650 lbs/day of PM<sub>2.5</sub>, or, or 1029 tons/year. (Id. at table 4.1-4, p. 4.1-10.)

However, the primary author of the CARB methodology has reported that this PM<sub>2.5</sub> health impact methodology is not suited for small projects and may yield unreliable results due to various uncertainties.<sup>9</sup> (SCAQMD, *Final Subsequent Mitigated Negative Declaration for: Warren* 

<sup>&</sup>lt;sup>8</sup> SCAQMD has not attained the latest annual or 24-hour national ambient air quality standards for " $PM_{2.5}$ " or particulate matter less than 2.5 microns in diameter.

<sup>&</sup>lt;sup>9</sup> Among these uncertainties are the representativeness of the population used in the methodology, and the specific source of PM and the corresponding health impacts. (*Id.* at p. 2-24.)

*E&P, Inc. WTU Central Facility, New Equipment Project (certified July 19, 2011)*, <u>http://www.aqmd.gov/home/library/documents-support-</u>material/lead-agency-permit-projects/permit-project-documents---year-2011; then follow "Final Subsequent Mitigated Negative Declaration for Warren E&P Inc. WTU Central Facility, New Equipment Project" hyperlink, pp. 2-22, 2-23 (last visited Apr. 1, 2015).) Therefore, when SCAQMD prepared a CEQA document for the expansion of an existing oil production facility, with very small PM<sub>2.5</sub> increases (3.8 lb/day) and a very small affected population, staff elected not to use the CARB methodology for using estimated PM<sub>2.5</sub> emissions to derive a projected premature mortality number and explained why it would be inappropriate to do so. (*Id.* at pp 2-22 to 2-24.) SCAQMD staff concluded that use of this methodology for such a small source could result in unreliable findings and would not provide meaningful information. (*Id.* at pp. 2-23, 2-25.) This CEQA document was not challenged in court.

In the above case, while it may have been technically possible to plug the data into the methodology, the results would not have been reliable or meaningful. SCAQMD believes that an agency should not be required to perform analyses that do not produce reliable or meaningful results. This Court has already held that an agency may decline to use even the "normal" "existing conditions" CEQA baseline where to do so would be misleading or without informational value. (*Neighbors for Smart Rail v. Exposition Metro Line* (2013) 57 Cal.4th 439, 448, 457.) The same should be true for a decision that a particular study or analysis would not provide reliable or meaningful results.<sup>10</sup>

<sup>&</sup>lt;sup>10</sup> Whether a particular study would result in "informational value" is a part of deciding whether it is "feasible." CEQA defines "feasible" as "capable of being accomplished in a successful manner within a reasonable period of time, taking into account economic, environmental, social, and

Therefore, it is not possible to set a hard-and-fast rule on whether a correlation of air quality impacts with specific quantifiable health impacts is required in all cases. Instead, the result turns on whether such an analysis is reasonably feasible in the particular case.<sup>11</sup> Moreover, what is reasonably feasible may change over time as scientists and regulatory agencies continually seek to improve their ability to predict health impacts. For example, CARB staff has been directed by its Governing Board to reassess and improve the methodology for estimating premature deaths. (California Air Resources Board, *Health Impacts Analysis: PM Mortality Relationship*, http://www.arb.ca.gov/research/health/pm-mort/pm-mort.htm (last reviewed Dec. 29, 2010).) This factor also counsels against setting any hard-and-fast rule in this case.

## III. THE QUESTION OF WHETHER AN EIR CONTAINS SUFFICIENT ANALYSIS TO MEET CEQA'S REQUIREMENTS IS A MIXED QUESTION OF FACT AND LAW GOVERNED BY TWO DIFFERENT STANDARDS OF REVIEW.

## A. Standard of Review for Feasibility Determination and Sufficiency as an Informative Document

A second issue in this case is whether courts should review an EIR's informational sufficiency under the "substantial evidence" test as argued by Friant Ranch or the "independent judgment" test as argued by Sierra Club.

<sup>11</sup> In this case, the lead agency did not have an opportunity to determine whether the requested analysis was feasible because the comment was nonspecific. Therefore, SCAQMD suggests that this Court, after resolving the legal issues in the case, direct the Court of Appeal to remand the case to the lead agency for a determination of whether the requested analysis is feasible. Because Fresno County, the lead agency, did not seek review in this Court, it seems likely that the County has concluded that at least some level of correlation of air pollution with health impacts is feasible.

technological factors." (Pub. Resources Code § 21061.1.) A study cannot be "accomplished in a *successful* manner" if it produces unreliable or misleading results.

As this Court has explained, "a reviewing court must adjust its scrutiny to the nature of the alleged defect, depending on whether the claim is predominantly one of improper procedure or a dispute over the facts." (*Vineyard Area Citizens v. City of Rancho Cordova, supra,* 40 Cal.4th at 435.) For questions regarding compliance with proper procedure or other legal questions, courts review an agency's action de novo under the "independent judgment" test. (*Id.*) On the other hand, courts review factual disputes only for substantial evidence, thereby "accord[ing] greater deference to the agency's substantive factual conclusions." (*Id.*)

Here, Friant Ranch and Sierra Club agree that the case involves the question of whether an EIR includes sufficient information regarding a project's impacts. However, they disagree on the proper standard of review for answering this question: Sierra Club contends that courts use the independent judgment standard to determine whether an EIR's analysis is sufficient to meet CEQA's informational purposes,<sup>12</sup> while Friant Ranch contends that the substantial evidence standard applies to this question.

- 111
- 111
- 111
- ///
- ///
- 111
- 111
- 111
- ///

<sup>&</sup>lt;sup>12</sup> Sierra Club acknowledges that courts use the substantial evidence standard when reviewing predicate factual issues, but argues that courts ultimately decide as a matter of law what CEQA requires. (Answering Brief, pp. 14, 23.)

SCAQMD submits that the issue is more nuanced than either party contends. We submit that, whether a CEQA document includes sufficient analysis to satisfy CEQA's informational mandates is a mixed question of fact and law,<sup>13</sup> containing two levels of inquiry that should be judged by different standards.<sup>14</sup>

The state CEQA Guidelines set forth standards for the adequacy of environmental analysis. Guidelines Section 15151 states:

An EIR should be prepared with a sufficient degree of analysis to provide decision makers with information which enables them to make a decision which intelligently takes account of environmental consequences. An evaluation of the environmental effects of a proposed project need not be exhaustive, but the sufficiency of an EIR is to be reviewed in light of what is reasonably feasible. Disagreement among experts does not make an EIR inadequate, but the EIR should summarize the main points of disagreement among the experts. The courts have looked not for perfection, but for adequacy, completeness, and a good-faith effort at full disclosure.

In this case, the basic question is whether the underlying analysis of air quality impacts made the EIR "sufficient" as an informative document. However, whether the EIR's analysis was sufficient is judged in light of what was reasonably feasible. This represents a mixed question of fact and law that is governed by two different standards of review.

<sup>&</sup>lt;sup>13</sup> Friant Ranch actually states that the claim that an EIR lacks sufficient relevant information is, "most properly thought of as raising mixed questions of fact and law." (Opening Brief, p. 27.) However, the remainder of its argument claims that the court should apply the substantial evidence standard of review to all aspects of the issue.

<sup>&</sup>lt;sup>14</sup> Mixed questions of fact and law issues may implicate predominantly factual subordinate questions that are reviewed under the substantial evidence test even though the ultimate question may be reviewed by the independent judgment test. *Crocker National Bank v. City and County of San Francisco* (1989) 49 Cal.3d 881, 888-889.

SCAQMD submits that an EIR's sufficiency as an informational document is ultimately a legal question that courts should determine using their independent judgment. This Court's language in Laurel Heights I supports this position. As this Court explained: "The court does not pass upon the correctness of the EIR's environmental conclusions, but only upon its sufficiency as an informative document." (Laurel Heights I, supra, 47 Cal.3d at 392-393) (emphasis added.) As described above, the Court in Vineyard Area Citizens v. City of Rancho Cordova, supra, 40 Cal.4th at 431, also used its independent judgment to determine what level of analysis CEQA requires for water supply impacts. The Court did not defer to the lead agency's opinion regarding the law's requirements; rather, it determined for itself what level of analysis was necessary to meet "[t]he law's informational demands." (Id. at p. 432.) Further, existing case law also holds that where an agency fails to comply with CEQA's information disclosure requirements, the agency has "failed to proceed in the manner required by law." (Save Our Peninsula Comm. v. Monterey County Bd. of Supervisors (2001) 87 Cal.App.4th 99, 118.)

However, whether an EIR satisfies CEQA's requirements depends in part on whether it was reasonably feasible for an agency to conduct additional or more thorough analysis. EIRs must contain "a detailed statement" of a project's impacts (Pub. Res. Code § 21061), and an agency must "use its best efforts to find out and disclose all that it reasonably can." (CEQA Guidelines § 15144.) Nevertheless, "the sufficiency of an EIR is to be reviewed in light of what is reasonably feasible." (CEQA Guidelines § 15151.)

SCAQMD submits that the question of whether additional analysis or a particular study suggested by a commenter is "feasible" is generally a question of fact. Courts have already held that whether a particular alternative is "feasible" is reviewed by the substantial evidence test.

(Uphold Our Heritage v. Town of Woodside (2007) 147 Cal.App.4th 587, 598-99; Center for Biological Diversity v. County of San Bernardino (2010) 185 Cal.App.4th 866, 883.) Thus, if a lead agency determines that a particular study or analysis is infeasible, that decision should generally be judged by the substantial evidence standard. However, SCAQMD urges this Court to hold that lead agencies must explain the basis of any determination that a particular analysis is infeasible in the EIR itself. An EIR must discuss information, including issues related to the feasibility of particular analyses "in sufficient detail to enable meaningful participation and criticism by the public. '[W]hatever is required to be considered in an EIR must be in that formal report; what any official might have known from other writings or oral presentations cannot supply what is lacking in the report."" (Laurel Heights I, supra, 47 Cal.3d at p. 405 (quoting Santiago County Water District v. County of Orange (1981) 118 Cal.App.3d 818, 831) (discussing analysis of alternatives).) The evidence on which the determination is based should also be summarized in the EIR itself, with appropriate citations to reference materials if necessary. Otherwise commenting agencies such as SCAQMD would be forced to guess where the lead agency's evidence might be located, thus thwarting effective public participation.

Moreover, if a lead agency determines that a particular study or analysis would not result in reliable or useful information and for that reason is not feasible, that determination should be judged by the substantial evidence test. (See *Neighbors for Smart Rail v. Exposition Metro Line Construction Authority, supra*, 57 Cal.4th 439, 448, 457:

whether "existing conditions" baseline would be misleading or uninformative judged by substantial evidence standard.<sup>15</sup>)

If the lead agency's determination that a particular analysis or study is not feasible is supported by substantial evidence, then the agency has not violated CEQA's information disclosure provisions, since it would be infeasible to provide additional information. This Court's decisions provide precedent for such a result. For example, this Court determined that the issue of whether the EIR should have included a more detailed discussion of future herbicide use was resolved because substantial evidence supported the agency's finding that "the precise parameters of future herbicide use could not be predicted." *Ebbetts Pass Forest Watch v. California Dept. of Forestry & Fire Protection* (2008) 43 Cal.4th 936, 955.

Of course, SCAQMD expects that courts will continue to hold lead agencies to their obligations to consult with, and not to ignore or misrepresent, the views of sister agencies having special expertise in the area of air quality. (*Berkeley Keep Jets Over the Bay v. Board of Port Commissioners* (2007) 91 Cal.App.4<sup>th</sup> 1344, 1364 n.11.) In some cases, information provided by such expert agencies may establish that the purported evidence relied on by the lead agency is not in fact "substantial". (*Id.* at pp. 1369-1371.)

In sum, courts retain ultimate responsibility to determine what CEQA requires. However, the law does not require exhaustive analysis, but only what is reasonably feasible. Agencies deserve deference for their factual determinations regarding what type of analysis is reasonably feasible. On the other hand, if a commenter requests more information, and the lead agency declines to provide it but does *not* determine that the

<sup>&</sup>lt;sup>15</sup> The substantial evidence standard recognizes that the courts "have neither the resources nor the scientific expertise" to weigh conflicting evidence on technical issues. (*Laurel Heights I, supra,* 47 Cal.3d 376, 393.)

requested study or analysis would be infeasible, misleading or uninformative, the question becomes whether the omission of that analysis renders the EIR inadequate to satisfy CEQA's informational purposes. (*Id.* at pp. 1370-71.) Again, this is predominantly a question of law and should be judged by the de novo or independent judgment standard of review. Of course, this Court has recognized that a "project opponent or reviewing court can always imagine some additional study or analysis that might provide helpful information. It is not for them to design the EIR. That further study...might be helpful does not make it necessary." (*Laurel Heights I, supra,* 47 Cal.3d 376, 415 – see also CEQA Guidelines § 15204(a) [CEQA "does not require a lead agency to conduct every test. . . recommended or demanded by commenters."].) Courts, then, must adjudicate whether an omission of particular information renders an EIR inadequate to serve CEQA's informational purposes.<sup>16</sup>

<sup>&</sup>lt;sup>16</sup> We recognize that there is case law stating that the substantial evidence standard applies to "challenges to the scope of an EIR's analysis of a topic" as well as the methodology used and the accuracy of the data relied on in the document "because these types of challenges involve factual questions." (Bakersfield Citizens for Local Control v. City of Bakersfield, supra, 124 Cal.App.4<sup>th</sup> 1184, 1198, and cases relied on therein.) However, we interpret this language to refer to situations where the question of the scope of the analysis really is factual—that is, where it involves whether further analysis is feasible, as discussed above. This interpretation is supported by the fact that the *Bakersfield* court expressly rejected an argument that a claimed "omission of information from the EIR should be treated as inquiries whether there is substantial evidence supporting the decision approving the project." Bakersfield, supra, 124 Cal.App.4th at p. 1208. And the Bakersfield court ultimately decided that the lead agency must analyze the connection between the identified air pollution impacts and resulting health impacts, even though the EIR already included some discussion of air-pollution-related respiratory illnesses. Bakersfield, supra, 124 Cal.App.4th at p. 1220. Therefore, the court must not have interpreted this question as one of the "scope of the analysis" to be judged by the substantial evidence standard.

### B. Friant Ranch's Rationale for Rejecting the Independent Judgment Standard of Review is Unsupported by Case Law.

In its brief, Friant Ranch makes a distinction between cases where a required CEQA topic is not discussed at all (to be reviewed by independent judgment as a failure to proceed in the manner required by law) and cases where a topic is discussed, but the commenter claims the information provided is insufficient (to be judged by the substantial evidence test). (Opening Brief, pp. 13-17.) The Court of Appeal recognized these two types of cases, but concluded that both raised questions of law. (*Sierra Club v. County of Fresno* (2014) 226 Cal.App.4th 704 (superseded by grant of review) 172 Cal.Rptr.3d 271, 290.) We believe the distinction drawn by Friant Ranch is unduly narrow, and inconsistent with cases which have concluded that CEQA documents are insufficient. In many instances, CEQA's requirements are stated broadly, and the courts must interpret the law to determine what level of analysis satisfies CEQA's mandate for providing meaningful information, even though the EIR discusses the issue to some extent.

For example, the CEQA Guidelines require discussion of the existing environmental baseline. In *County of Amador v. El Dorado County Water Agency* (1999) 76 Cal.App.4th 931, 954-955, the lead agency had discussed the environmental baseline by describing historic month-end water levels in the affected lakes. However, the court held that this was not an adequate baseline discussion because it failed to discuss the timing and amounts of past actual water releases, to allow comparison with the proposed project. The court evidently applied the independent judgment test to its decision, even though the agency discussed the issue to some extent.

Likewise, in *Vineyard Area Citizens* (2007) 40 Cal.4th 412, this Court addressed the question of whether an EIR's analysis of water supply impacts complied with CEQA. The parties agreed that the EIR was required to analyze the effects of providing water to the development project, "and that in order to do so the EIR had, in some manner, to identify the planned sources of that water." (*Vineyard Area Citizens, supra,* at p. 428.) However, the parties disagreed as to the level of detail required for this analysis and "what level of uncertainty regarding the availability of water supplies can be tolerated in an EIR ...." (*Id.*) In other words, the EIR had analyzed water supply impacts for the project, but the petitioner claimed that the analysis was insufficient.

This Court noted that neither CEQA's statutory language or the CEQA Guidelines specifically addressed the question of how precisely an EIR must discuss water supply impacts. (Id.) However, it explained that CEQA "states that '[w]hile foreseeing the unforeseeable is not possible, an agency must use its best efforts to find out and disclose all that it reasonably can." (Id., [Guidelines § 15144].) The Court used this general principle, along with prior precedent, to elucidate four "principles for analytical adequacy" that are necessary in order to satisfy "CEQA's informational purposes." (Vineyard Area Citizens, supra, at p. 430.) The Court did not defer to the agency's determination that the EIR's analysis of water supply impacts was sufficient. Rather, this Court used its independent judgment to determine for itself the level of analysis required to satisfy CEQA's fundamental purposes. (Vineyard Area Citizens, supra, at p. 441: an EIR does not serve its purposes where it neglects to explain likely sources of water and "... leaves long term water supply considerations to later stages of the project.")

Similarly, the CEQA Guidelines require an analysis of noise impacts of the project. (Appendix G, "Environmental Checklist Form."<sup>17</sup>) In *Gray v. County of Madera* (2008) 167 Cal.App.4th 1099, 1123, the court held that the lead agency's noise impact analysis was inadequate even though it had addressed the issue and concluded that the increase would not be noticeable. If the court had been using the substantial evidence standard, it likely would have upheld this discussion.

Therefore, we do not agree that the issue can be resolved on the basis suggested by Friant Ranch, which would apply the substantial evidence standard to *every* challenge to an analysis that addresses a required CEQA topic. This interpretation would subvert the courts' proper role in interpreting CEQA and determining what the law requires.

Nor do we agree that the Court of Appeal in this case violated CEQA's prohibition on courts interpreting its provisions "in a manner which imposes procedural or substantive requirements beyond those explicitly stated in this division or in the state guidelines." (Pub. Resources Code § 21083.1.) CEQA requires an EIR to describe *all* significant impacts of the project on the environment. (Pub. Resources Code § 21100(b)(2); *Vineyard Area Citizens, supra,* at p. 428.) Human beings are part of the environment, so CEQA requires EIRs to discuss a project's significant impacts on human health. However, except in certain particular circumstances,<sup>18</sup> neither the CEQA statute nor Guidelines specify the precise level of analysis that agencies must undertake to satisfy the law's requirements. (see, e.g., CEQA Guidelines § 15126.2(a) [EIRs must describe "health and safety problems caused by {a project's} physical changes"].) Accordingly, courts must interpret CEQA as a whole to

<sup>&</sup>lt;sup>17</sup> Association of Environmental Professionals, 2015 CEQA Statute and Guidelines (2015) p.287.

<sup>&</sup>lt;sup>18</sup> E.g., Pub. Resources Code § 21151.8(C)(3)(B)(iii) (requiring specific type of health risk analysis for siting schools).

determine whether a particular EIR is sufficient as an informational document. A court determining whether an EIR's discussion of human health impacts is legally sufficient does not constitute imposing a new substantive requirement.<sup>19</sup> Under Friant Ranch's theory, the above-referenced cases holding a CEQA analysis inadequate would have violated the law. This is not a reasonable interpretation.

# IV. COURTS MUST SCRUPULOUSLY ENFORCE THE REQUIREMENTS THAT LEAD AGENCIES CONSULT WITH AND OBTAIN COMMENTS FROM AIR DISTRICTS

Courts must "scrupulously enforce" CEQA's legislatively mandated requirements. (*Vineyard Area Citizens, supra*, 40 Cal.4<sup>th</sup> 412, 435.) Case law has firmly established that lead agencies must consult with the relevant air pollution control district before conducting an initial study, and must provide the districts with notice of the intention to adopt a negative declaration (or EIR). (*Schenck v. County of Sonoma* (2011) 198 Cal.App.4th 949, 958.) As *Schenck* held, neither publishing the notice nor providing it to the State Clearinghouse was a sufficient substitute for sending notice directly to the air district. (*Id.*) Rather, courts "must be satisfied that [administrative] agencies have fully complied with the procedural requirements of CEQA, since only in this way can the important public purposes of CEQA be protected from subversion." *Schenck*, 198 Cal.App.4th at p. 959 (citations omitted).<sup>20</sup>

<sup>&</sup>lt;sup>19</sup> We submit that Public Resources Code Section 21083.1 was intended to prevent courts from, for example, holding that an agency must analyze economic impacts of a project where there are no resulting environmental impacts (see CEQA Guidelines § 15131), or imposing new procedural requirements, such as imposing additional public notice requirements not set forth in CEQA or the Guidelines.

 $<sup>^{20}</sup>$  Lead agencies must consult air districts, as public agencies with jurisdiction by law over resources affected by the project, *before* releasing an EIR. (Pub. Resources Code §§ 21104(a); 21153.) Moreover, air

Lead agencies should be aware, therefore, that failure to properly seek and consider input from the relevant air district constitutes legal error which may jeopardize their project approvals. For example, the court in *Fall River Wild Trout Foundation v. County of Shasta*, (1999) 70 Cal.App.4th 482, 492 held that the failure to give notice to a trustee agency (Department of Fish and Game) was prejudicial error requiring reversal. The court explained that the lack of notice prevented the Department from providing any response to the CEQA document. (*Id.* at p. 492.) It therefore prevented relevant information from being presented to the lead agency, which was prejudicial error because it precluded informed decision-making. (*Id.*)<sup>21</sup>

districts should be considered "state agencies" for purposes of the requirement to consult with "trustee agencies" as set forth in Public Resources Code § 20180.3(a). This Court has long ago held that the districts are not mere "local agencies" whose regulations are superseded by those of a state agency regarding matters of statewide concern, but rather have concurrent jurisdiction over such issues. (Orange County Air Pollution Control District v. Public Util. Com. (1971) 4 Cal.3d 945, 951, 954.) Since air pollution is a matter of statewide concern, Id at 952, air districts should be entitled to trustee agency status in order to ensure that this vital concern is adequately protected during the CEQA process. <sup>21</sup> In *Schenck*, the court concluded that failure to give notice to the air district was not prejudicial, but this was partly because the trial court had already corrected the error before the case arrived at the Court of Appeal. The trial court issued a writ of mandate requiring the lead agency to give notice to the air district. The air district responded by concurring with the lead agency that air impacts were not significant. (Schenck, 198 Cal.App.4th 949, 960.) We disagree with the Schenck court that the failure to give notice to the air district would not have been prejudicial (even in the absence of the trial court writ) merely because the lead agency purported to follow the air district's published CEQA guidelines for significance. (Id., 198 Cal.App.4th at p. 960.) In the first place, absent notice to the air district, it is uncertain whether the lead agency properly followed those guidelines. Moreover, it is not realistic to expect that an air district's published guidelines would necessarily fully address all possible air-quality related issues that can arise with a CEQA project, or that those

Similarly, lead agencies must obtain additional information requested by expert agencies, including those with jurisdiction by law, if that information is necessary to determine a project's impacts. (*Sierra Club v. State Bd. Of Forestry* (1994) 7 Cal.4th 1215, 1236-37.) Approving a project without obtaining that information constitutes a failure to proceed in the manner prescribed by CEQA. (*Id.* at p. 1236.)

Moreover, a lead agency can save significant time and money by consulting with the air district early in the process. For example, the lead agency can learn what the air district recommends as an appropriate analysis on the facts of its case, including what kinds of health impacts analysis may be available, and what models are appropriate for use. This saves the lead agency from the need to do its analysis all over again and possibly needing to recirculate the document after errors are corrected, if new significant impacts are identified. (CEQA Guidelines § 15088.5(a).) At the same time, the air district's expert input can help the lead agency properly determine whether another commenter's request for additional analysis or studies is reasonable or feasible. Finally, the air district can provide input on what mitigation measures would be feasible and effective.

Therefore, we suggest that this Court provide guidance to lead agencies reminding them of the importance of consulting with the relevant air districts regarding these issues. Otherwise, their feasibility decisions may be vulnerable to air district evidence that establishes that there is no substantial evidence to support the lead agency decision not to provide specific analysis. (*See Berkeley Keep Jets Over the Bay, supra*, 91 Cal.App.4th 1344, 1369-1371.)

guidelines would necessarily be continually modified to reflect new developments. Therefore we believe that, had the trial court not already ordered the lead agency to obtain the air district's views, the failure to give notice would have been prejudicial, as in *Fall River, supra*, 70 Cal.App.4th 482, 492.

#### CONCLUSION

The SCAQMD respectfully requests this Court *not* to establish a hard-and-fast rule concerning whether CEQA requires a lead agency to correlate identified air quality impacts of a project with resulting health outcomes. Moreover, the question of whether an EIR is "sufficient as an informational document" is a mixed question of fact and law containing two levels of inquiry. Whether a particular proposed analysis is feasible is predominantly a question of fact to be judged by the substantial evidence standard of review. Where the requested analysis is feasible, but the lead agency relies on legal or policy reasons not to provide it, the question of whether the EIR is nevertheless sufficient as an informational document is predominantly a question of law to be judged by the independent judgment standard of review.

DATED: April 3, 2015

Respectfully submitted,

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT KURT R. WIESE, GENERAL COUNSEL BARBARA BAIRD, CHIEF DEPUTY COUNSEL

Q By: l

Barbara Baird Attorneys for Amicus Curiae SOUTH COAST AIR QUALITY MANAGEMENT DISTICT

## **CERTIFICATE OF WORD COUNT**

Pursuant to Rule 8.520(c)(1) of the California Rules of Court, I hereby certify that this brief contains 8,476 words, including footnotes, but excluding the Application, Table of Contents, Table of Authorities, Certificate of Service, this Certificate of Word Count, and signature blocks. I have relied on the word count of the Microsoft Word Vista program used to prepare this Certificate.

DATED: April 3, 2015

Respectfully submitted,

1 Surbara Brind Barbara Baird

#### **PROOF OF SERVICE**

I am employed in the County of Los Angeles, California. I am over the age of 18 years and not a party to the within action. My business address is 21865 Copley Drive, Diamond Bar, California 91765.

On April 3, 2015 I served true copies of the following document(s) described as APPLICATION OF THE SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT FOR LEAVE TO FILE BRIEF OF AMICUS CURIAE IN SUPPORT OF NEITHER PARTY AND [PROPOSED] BRIEF OF AMICUS CURIAE by placing a true copy of the foregoing document(s) in a sealed envelope addressed as set forth on the attached service list as follows:

**BY MAIL:** I enclosed the document(s) in a sealed envelope or package addressed to the persons at the addresses listed in the Service List and placed the envelope for collection and mailing following our ordinary business practices. I am readily familiar with this District's practice for collection and processing of correspondence for mailing. Under that practice, the correspondence would be deposited with the United States Postal Service, with postage thereon fully prepaid at Diamond Bar, California, in the ordinary course of business. I am aware that on motion of the party served, service is presumed invalid if postal cancellation date or postage meter date is more than one day after date of deposit for mailing in affidavit.

I declare under penalty of perjury under the laws of the State of California that the foregoing is true and correct.

Executed on April 3, 2015 at Diamond Bar, California.

Tun Ander 82 Patricia Anderson

### **SERVICE LIST**

James G. Moose, Tiffany K. Wright, Laura M. Harris REMY MOOSE MANLEY, LLP 555 Capitol Mall, Suite 800 Sacramento, CA 95814

Bryan N. Wagner WAGNER & WAGNER 7110 N. Fresno St, Suite 340 Fresno, CA 93720

Sara Hedgpeth-Harris LAW OFFICE OF SARA HEDGPETH-HARRIS 5445 E. Lane Avenue Fresno, CA 93727

Daniel C. Cederborg Bruce B. Johnson, Jr. Zachary Stephen Redmond OFFICE OF THE FRESNO COUNTY COUNSEL 2220 Tulare Street, Suite 500 Fresno, CA 93721

Clerk of the Court California Court of Appeal Fifth Appellate District 2424 Ventura Street Fresno, CA 93721 (via U.S. Mail & Electronic Transmission)

Clerk of the Court Superior Court of California County of Fresno 1130 O Street Fresno, CA 93721 Attorneys for Real Party in Interest and Respondent *Friant Ranch, L.P.* 

Attorney for Real Party in Interest and Respondent *Friant Ranch*, *L.P.* 

Attorney for Plaintiffs and Appellants Sierra Club, et al

Attorneys for Respondents County of Fresno This page intentionally left blank

